

Ka Band Conical Horn Antenna, 23 dBi Gain

Description:

Model SAC-2309-315-S2-WP is a Ka-band conical horn antenna that operates from 27 to 33 GHz. The antenna offers 23 dBi nominal gain and a typical half power beamwidth of 11 degrees on the E-plane and 13 degrees on the H-plane. The horn also offers typical sidelobes of -20 dB on the E-plane and -28 dB on the H-plane. The conical horn can support linear and circular polarization. The input of this antenna is a 0.315" diameter circular waveguide with UG-599/U-M flange.



Features:

- Circular Waveguide Interface
- Precisely Machined and Gold Plated
- High Return Loss
- Linear and Circular Polarization

Applications:

- Antenna Ranges
- Feed Horns
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency*	27 GHz		33 GHz
Gain		23 dBi	
3 dB Beamwidth, E-plane		11°	
3 dB Beamwidth, H-plane		13°	
Sidelobes, E-plane		-20 dB	
Sidelobes, H-plane		-28 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Note: Can operate from 25 to 40 GHz if the dominant mode is maintained.


Mechanical Specifications:

Item	Specification
Antenna Port	0.315" Diameter Circular Waveguide
Flange Type	UG-599/U-M Flange
Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	5.00" (L) X 2.51" (Ø)
Outline	AC-CA2-315




Ka Band Conical Horn Antenna, 23 dBi Gain

Simulated Antenna Patterns @ 26 GHz

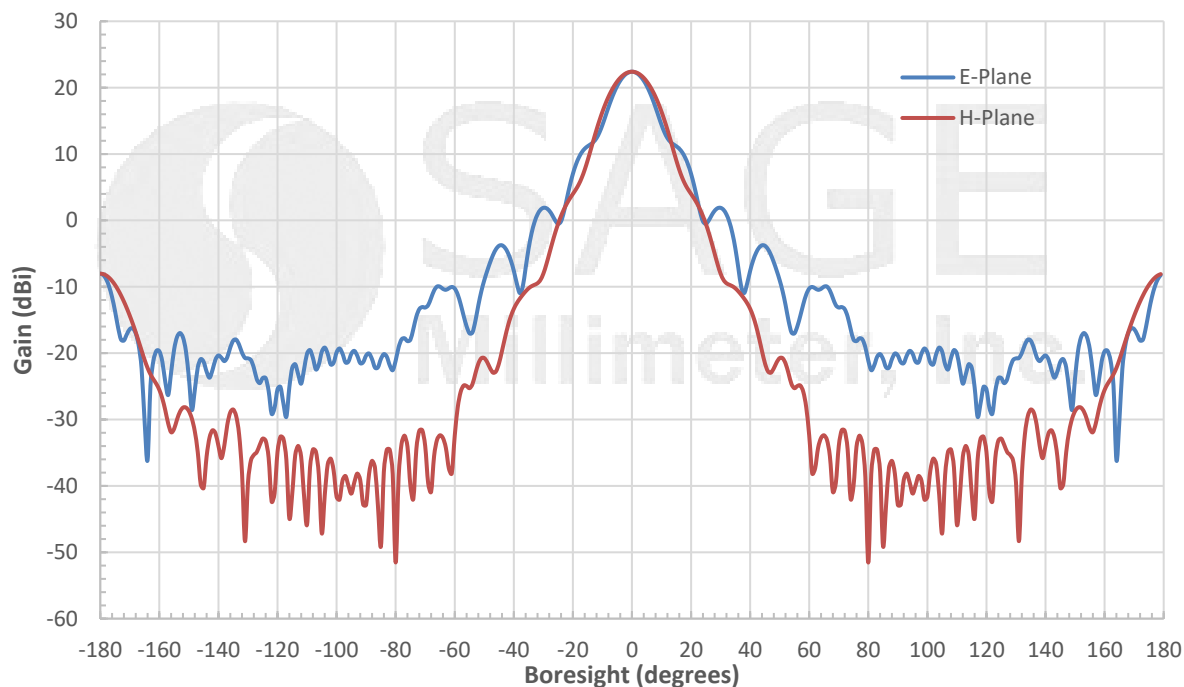


Simulated Antenna Patterns @ 29.5 GHz

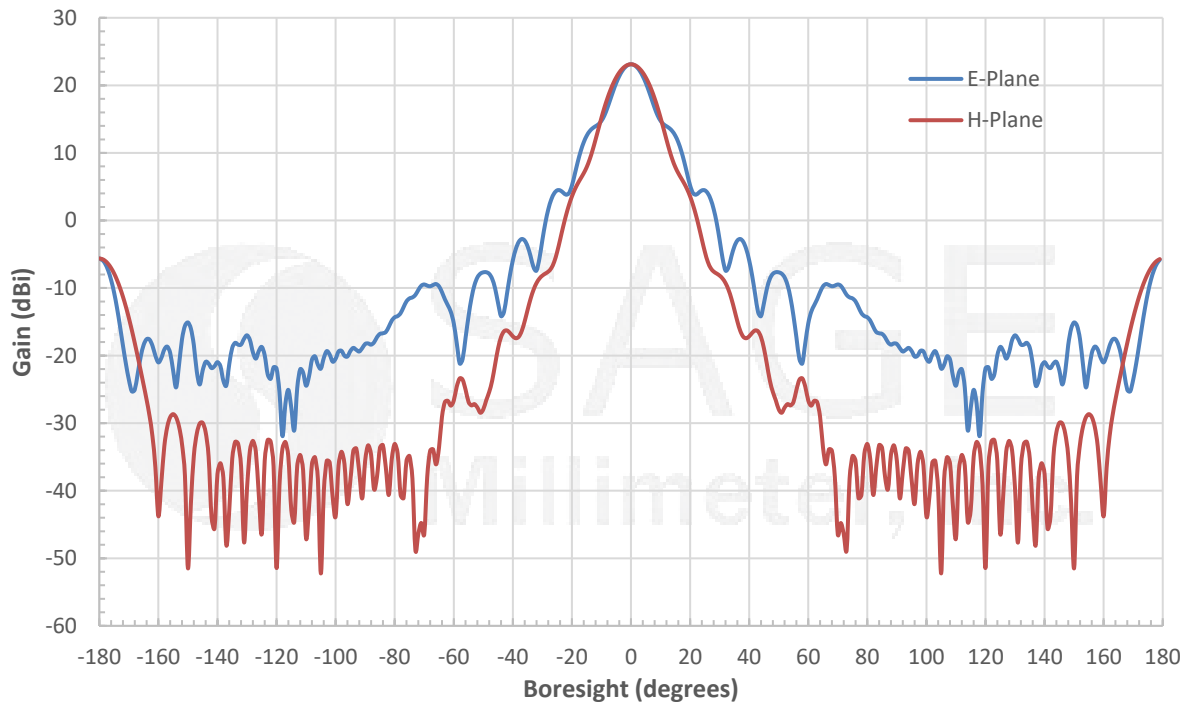


Ka Band Conical Horn Antenna, 23 dBi Gain

Simulated Antenna Patterns @ 33 GHz

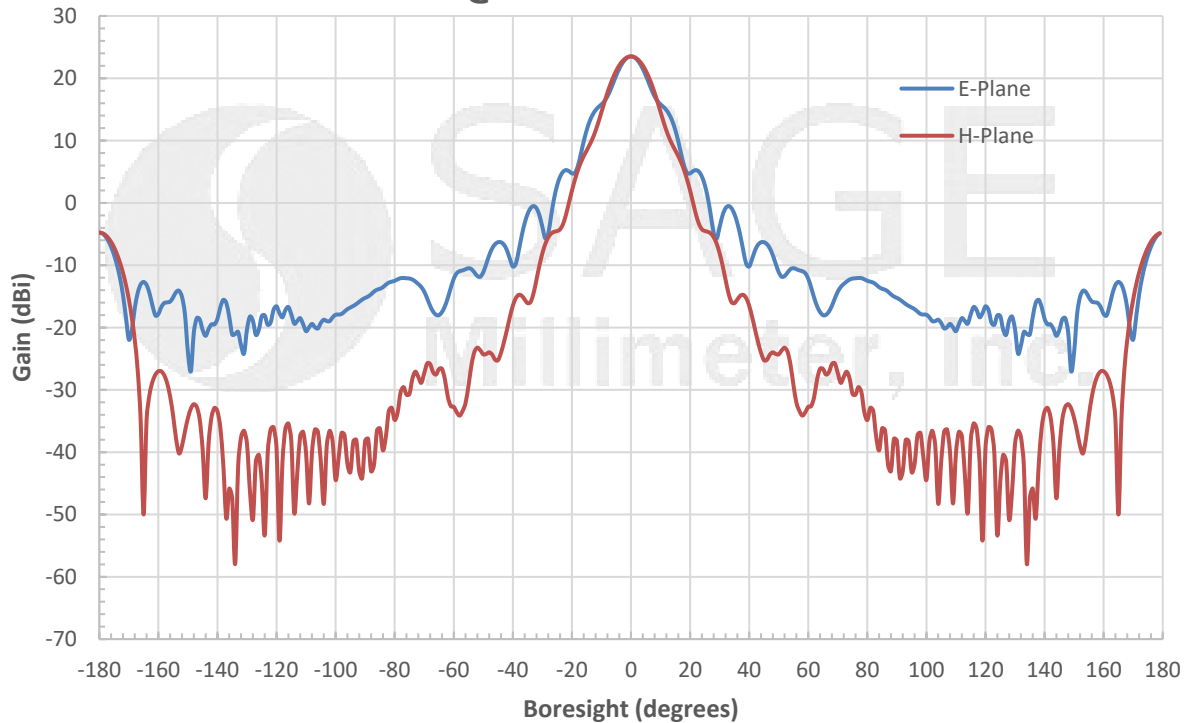


Simulated Gain vs. Frequency

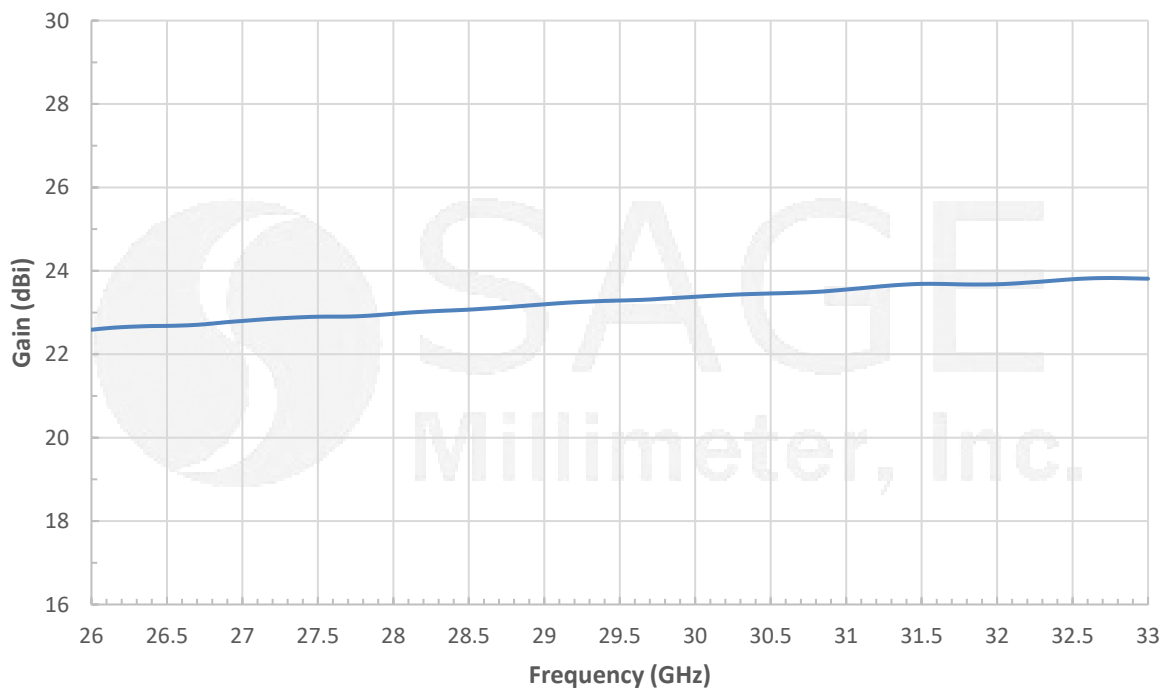

Ka Band Conical Horn Antenna, 23 dBi Gain

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

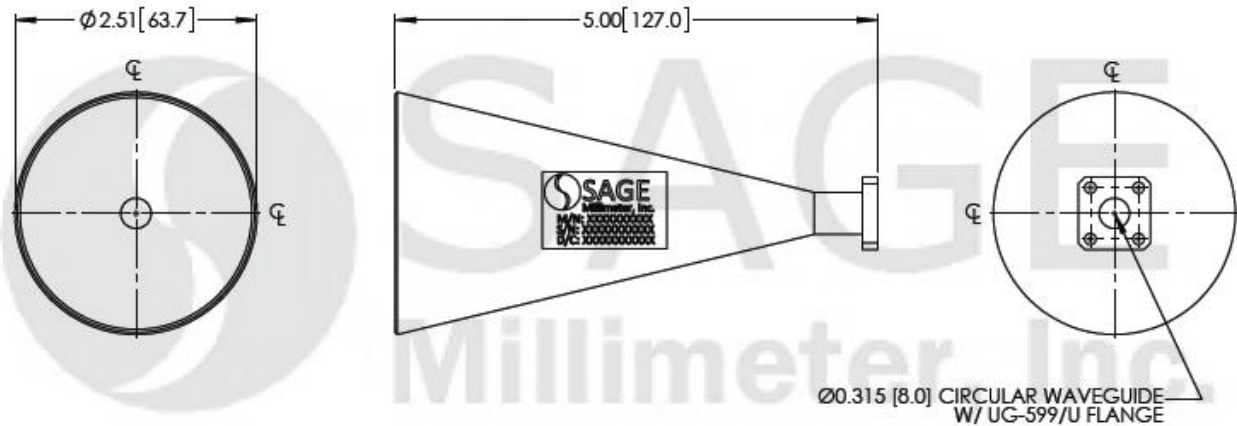

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

