



Q Band Scalar Feed Horn Antenna, 15 dBi Gain

Description:

Model SAF-3335031535-250-S1 is a Q-band scalar feed horn antenna that operates from 33 to 50 GHz. The antenna offers a 15 dBi nominal gain, 35 degree typical half power beamwidth, and -25 dB typical side lobe level. The scalar feed horn is equipped with a 0.250" diameter circular waveguide that supports both linear and circular polarization. A rectangular waveguide port configuration that only supports linear polarization is available under a different model number.



Features:

- Circular Waveguide Interface
- Precisely Machined
- Low Side Lobe Level
- High Return Loss
- Linear and Circular Polarization

Applications:

- Feed Horn for Gaussian Optical Antennas
- Feed Horn for Cassegrain Antennas
- Rapid System Setups
- Engineering Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	33 GHz	41.5 GHz	50 GHz
Gain		15 dBi	
3 dB Beamwidth, E-plane		35°	
3 dB Beamwidth, H-plane		35°	
Side Lobes, E-plane		-25 dB	
Side Lobes, H-plane		-25 dB	
Return Loss		20 dB	
Polarization	Linear and Circular		
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.250" Diameter Circular Waveguide
Flange Type	UG-383/U
Material	Brass
Finish	Gold Plated
Weight	1.8 Oz
Size	2.75" (L) x 1.25 (Ø)
Outline	AF-CQ15-250






Q Band Scalar Feed Horn Antenna, 15 dBi Gain

Simulated Antenna Patterns @ 33 GHz

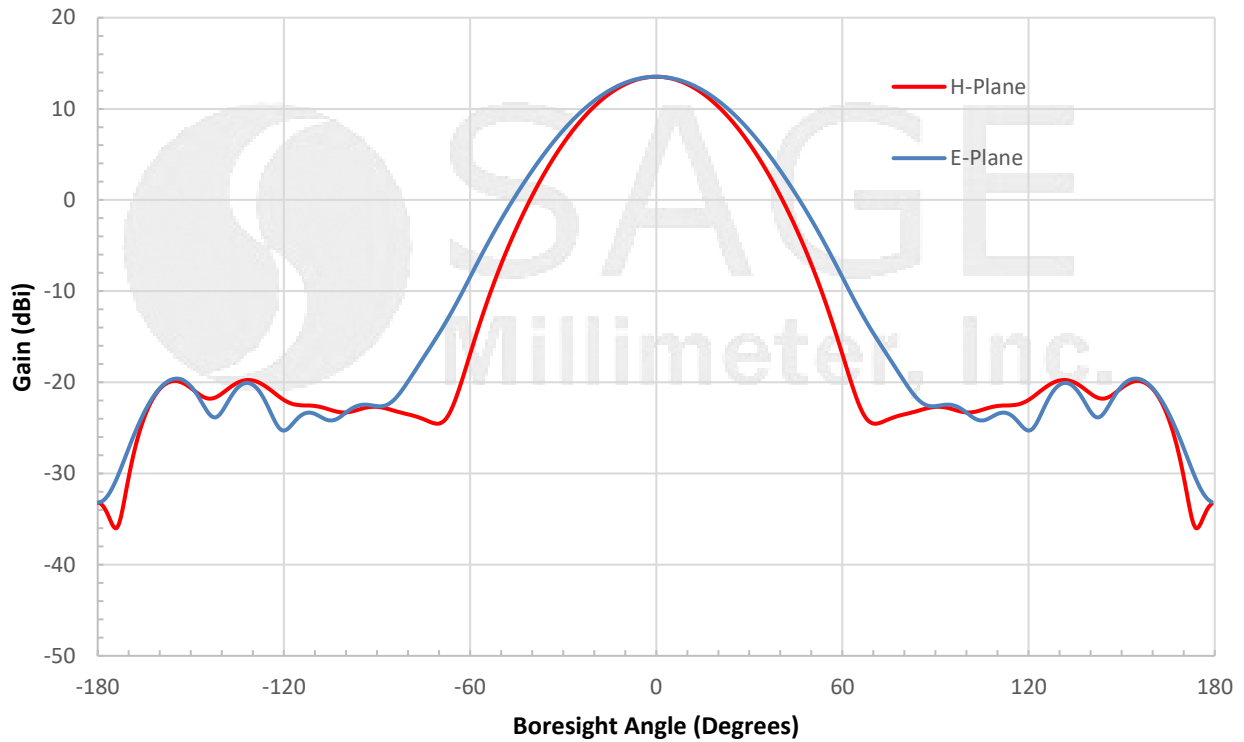


Simulated Antenna Patterns @ 42 GHz

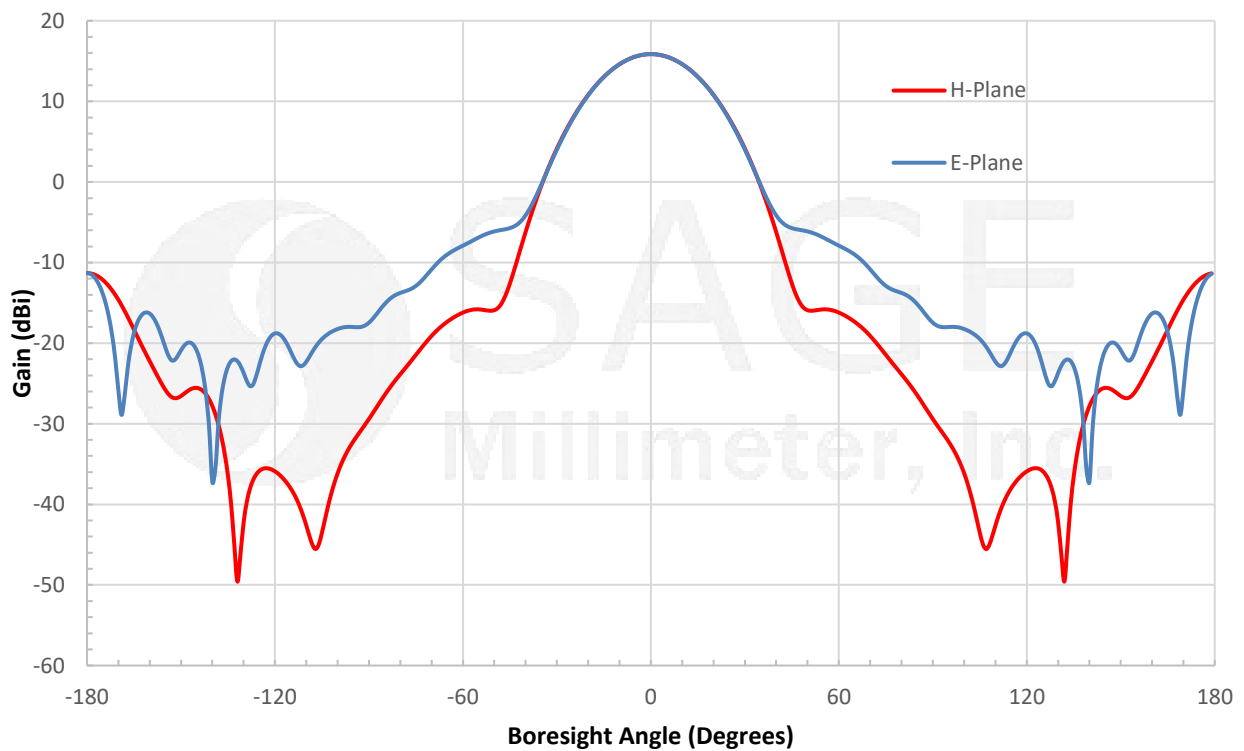




Q Band Scalar Feed Horn Antenna, 15 dBi Gain

Simulated Antenna Patterns @ 50 GHz

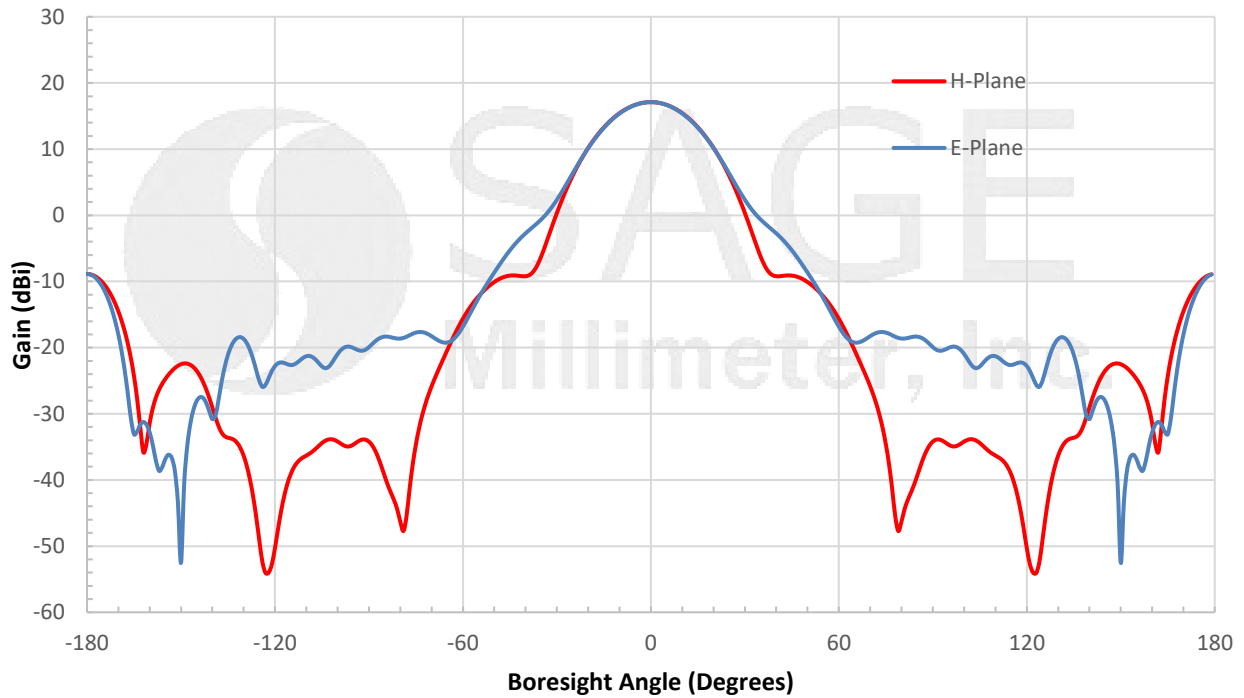


Simulated Gain vs. Frequency

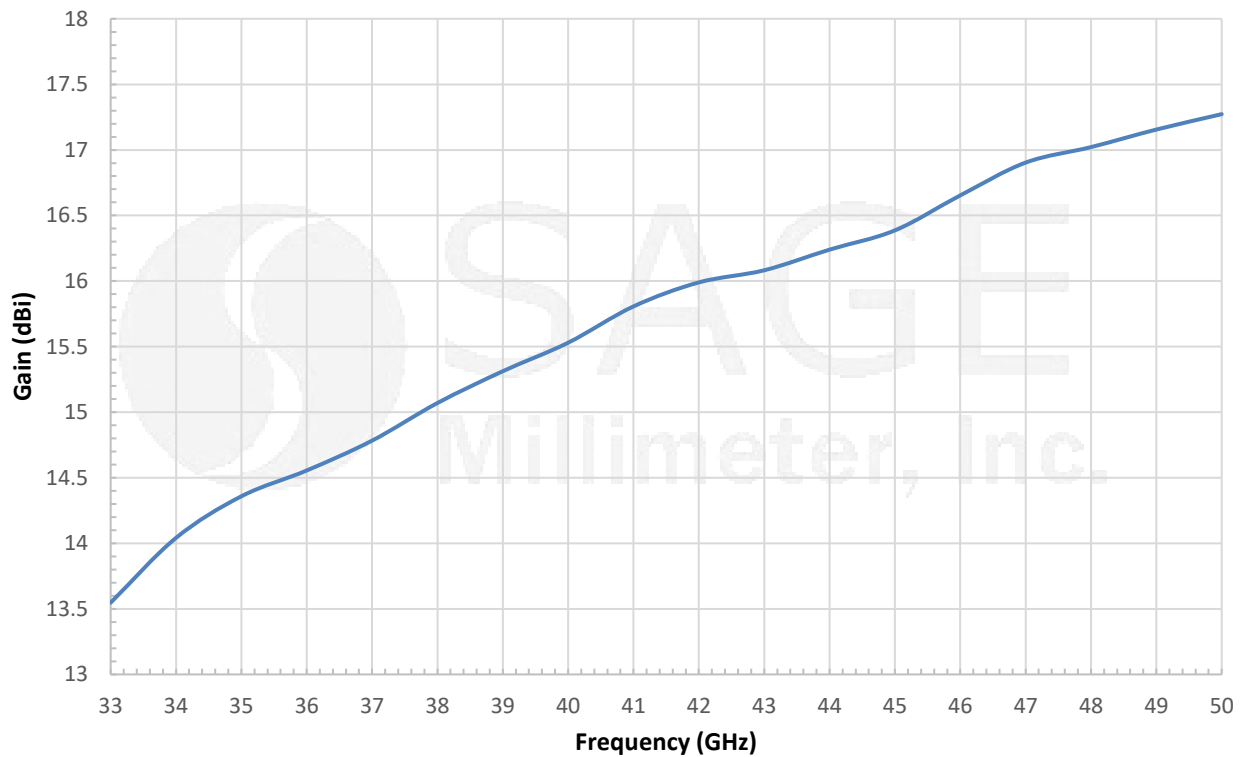




Q Band Scalar Feed Horn Antenna, 15 dBi Gain

Simulated Return Loss vs. Frequency

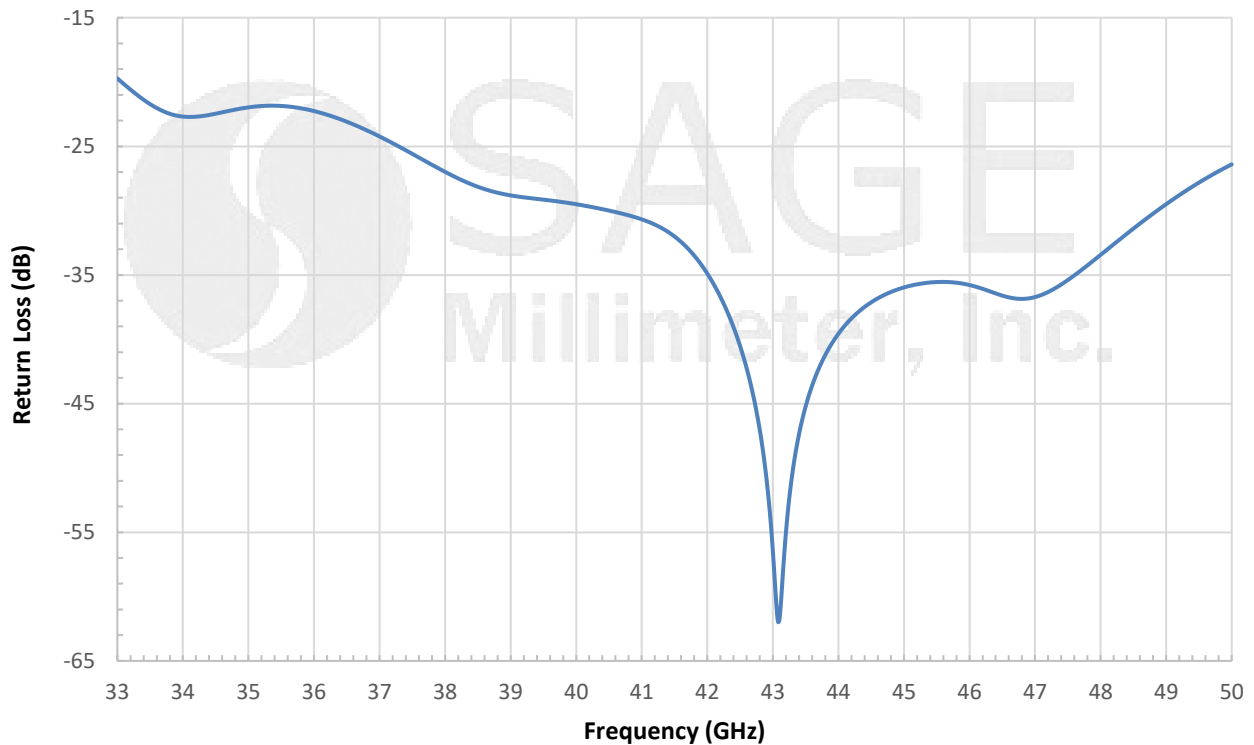


Simulated 3 dB Beamwidth vs. Frequency

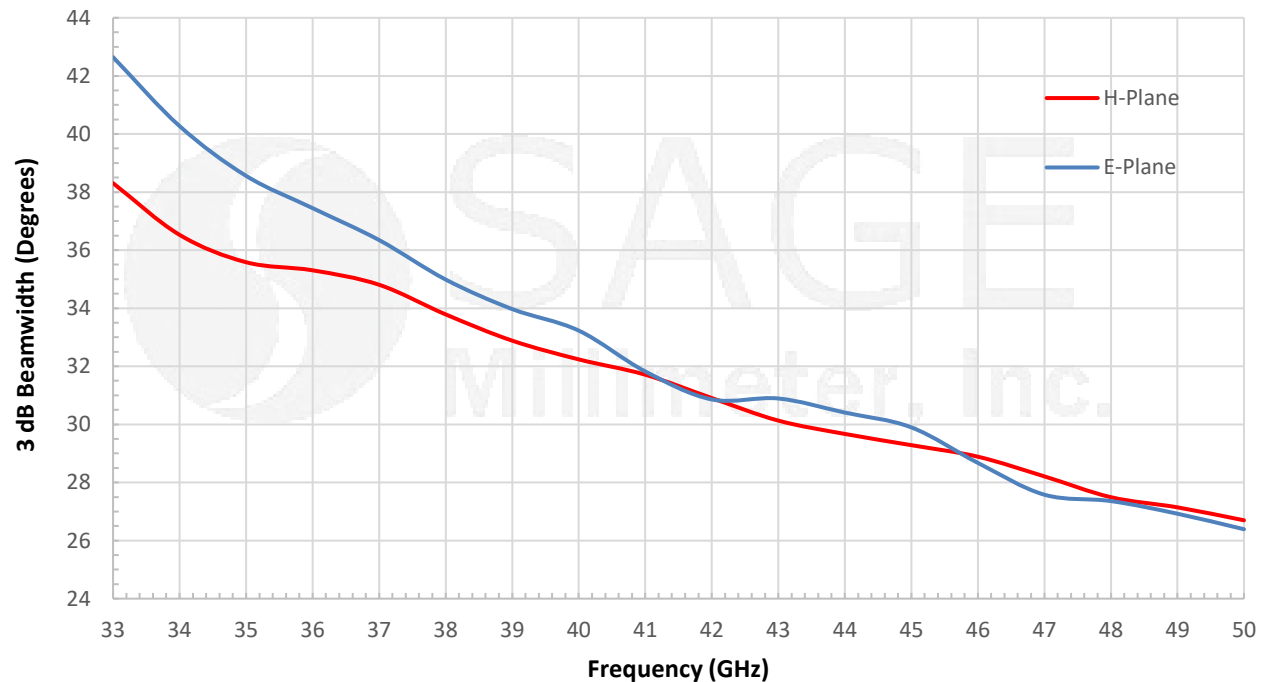

Q Band Scalar Feed Horn Antenna, 15 dBi Gain

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

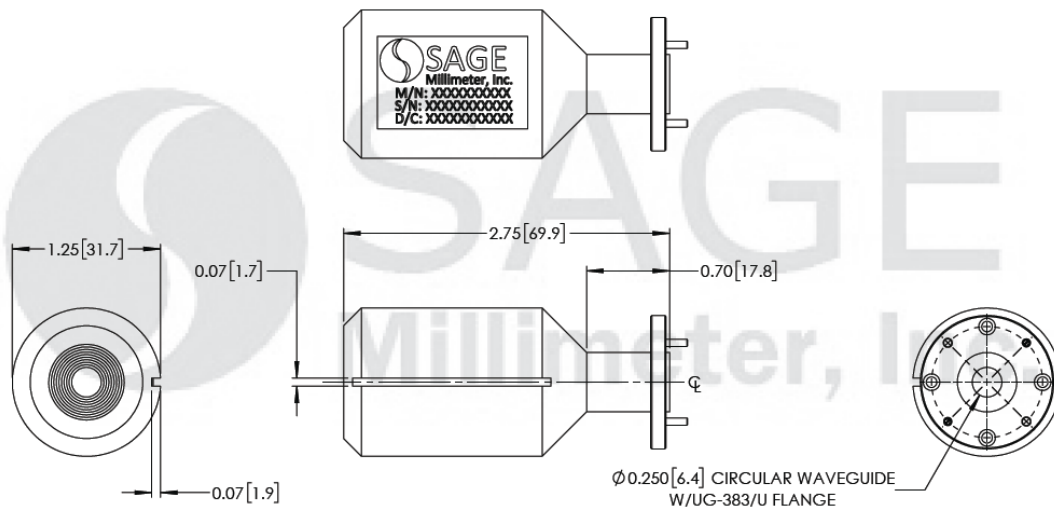**Note:**

- All data presented is simulated. Actual data may vary slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

