

V Band Scalar Feed Horn Antenna, 50 to 75 GHz

Description:

Model SAF-5037531340-165-S1 is a V-band scalar feed horn antenna that operates from 50 to 75 GHz. The antenna offers a 13 dBi nominal gain, 40 degree typical half power beamwidth. The nominal side lobe levels are -25 dB or lower. The scalar feed horn is equipped with a 0.165" diameter circular waveguide that supports both linear and circular polarized waveforms. A rectangular waveguide port configuration that only supports linear polarization is available under a different model number.



Features:

- Ultrabroad Band Operation
- Low Sidelobe Level
- High Return Loss
- Linear and Circular Polarization

Applications:

- Feed Horn for Gaussian Optical Antennas
- Feed Horn for Cassegrain Antennas
- Rapid System Setups
- Engineering Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz	62.5 GHz	75 GHz
Gain		13 dBi	
3 dB Beamwidth, E-plane		40°	
3 dB Beamwidth, H-plane		40°	
Side Lobes, E-plane		-25 dB	
Side Lobes, H-plane		-25 dB	
Return Loss		20 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.165" Diameter Circular Waveguide
Flange Type	UG-385/U-M
Material	Brass
Finish	Gold Plated
Weight	0.48 Oz
Size	0.75 (L) X 0.62 (Ø)
Outline	AF-CV13-165






V Band Scalar Feed Horn Antenna, 50 to 75 GHz

Simulated Antenna Patterns @ 50 GHz

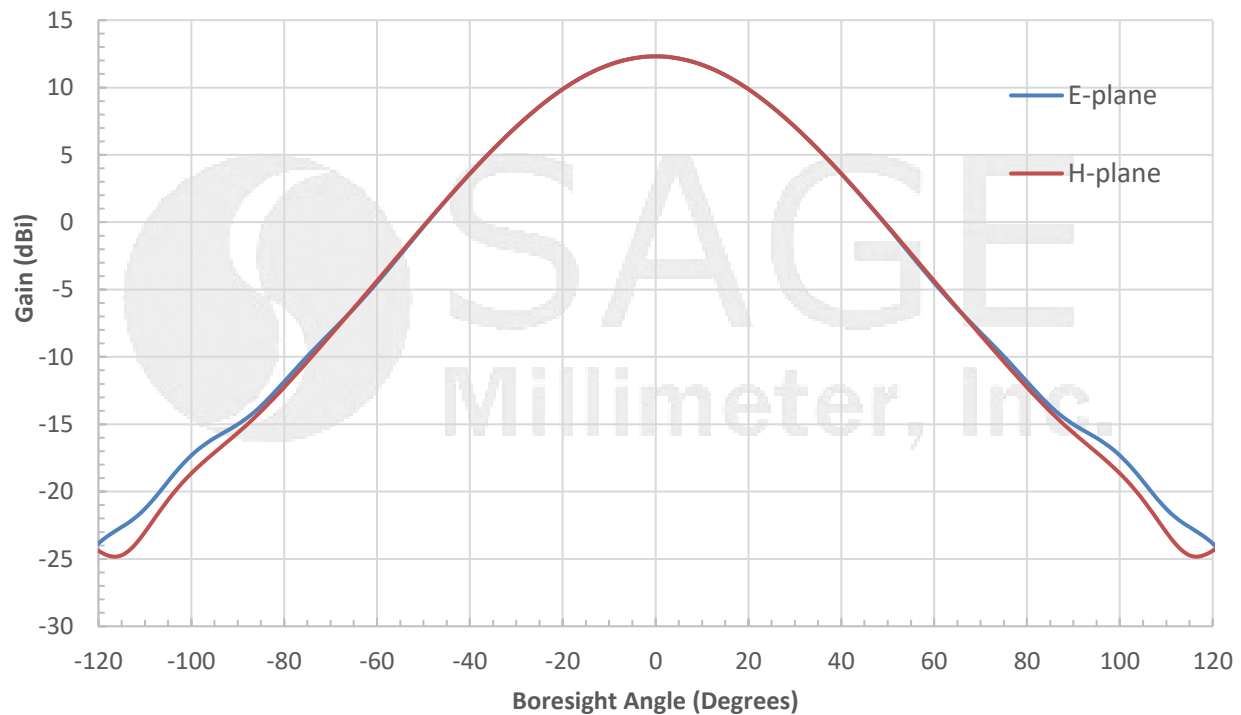


Simulated Antenna Patterns @ 60 GHz

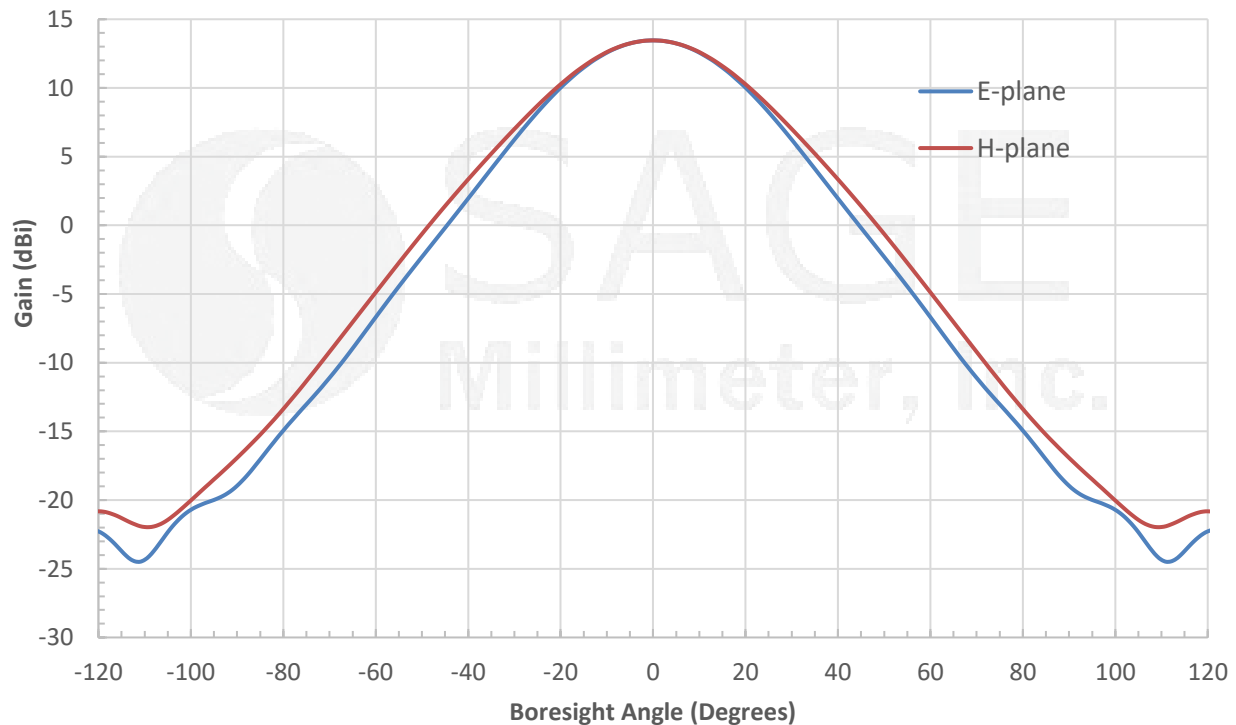




V Band Scalar Feed Horn Antenna, 50 to 75 GHz

Simulated Antenna Patterns @ 75 GHz

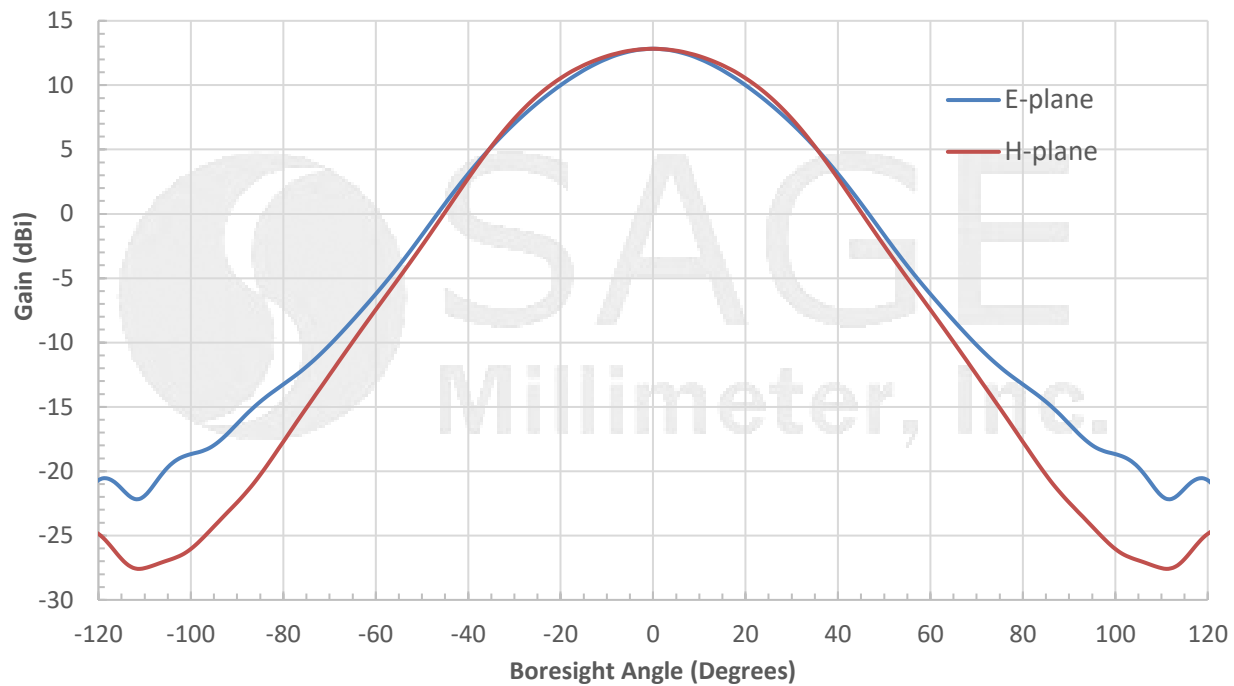


Simulated Gain vs. Frequency

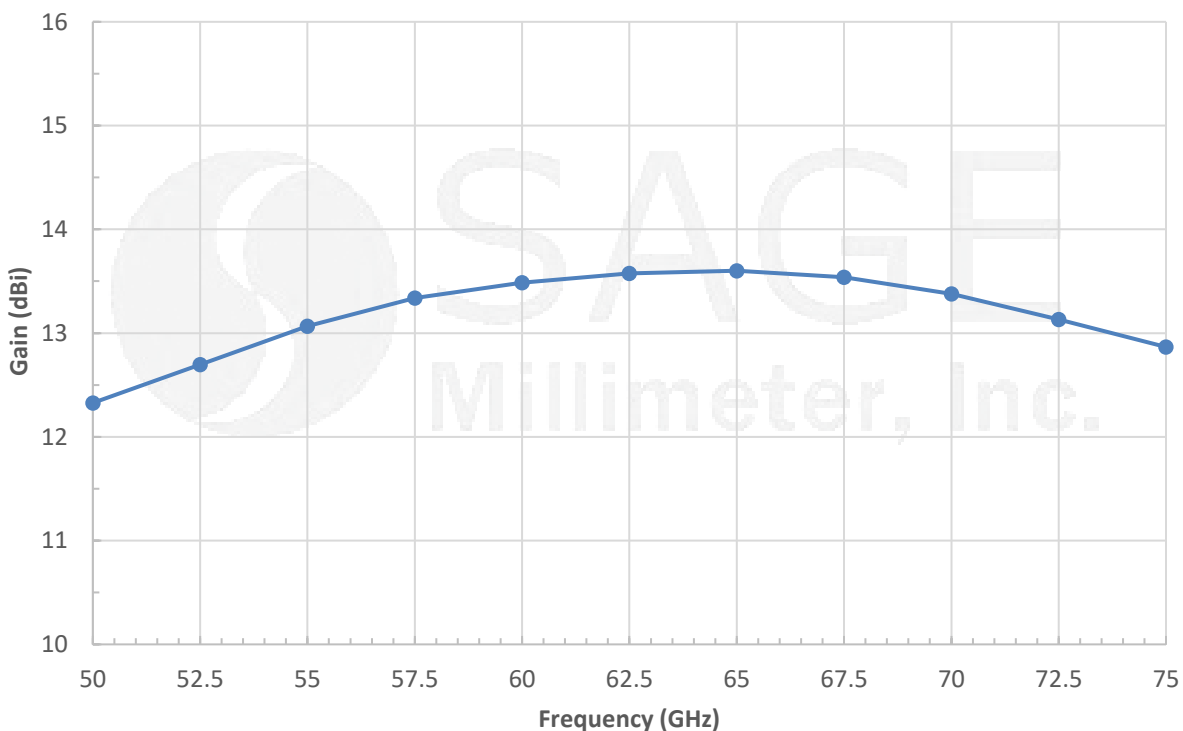

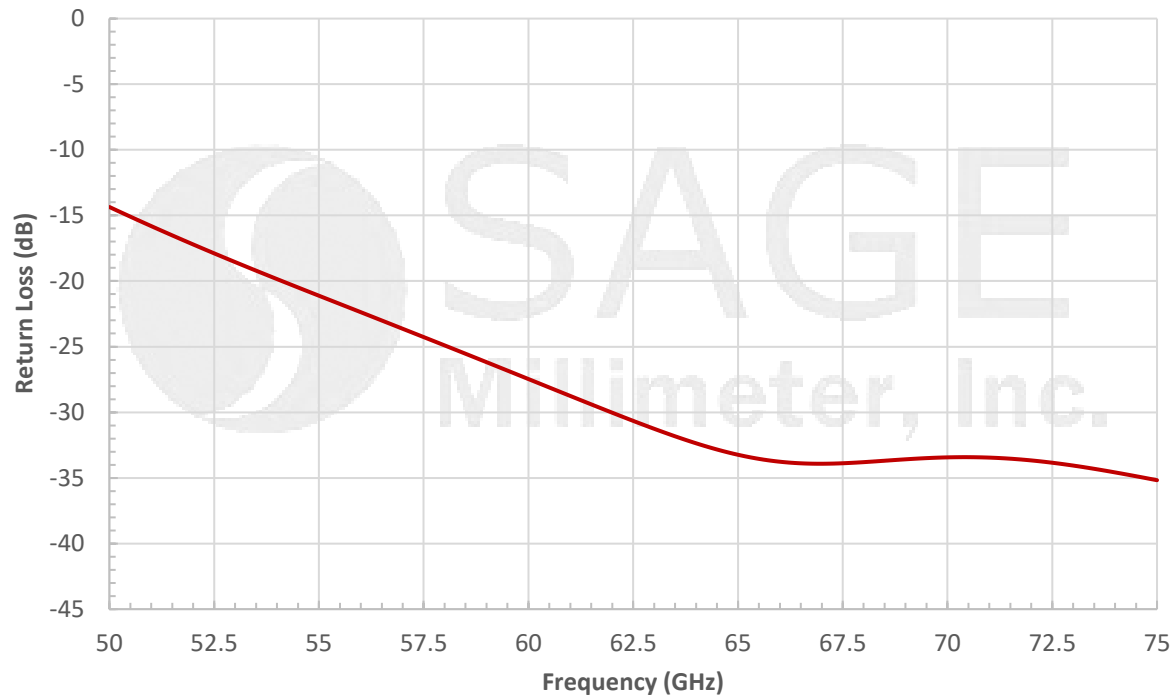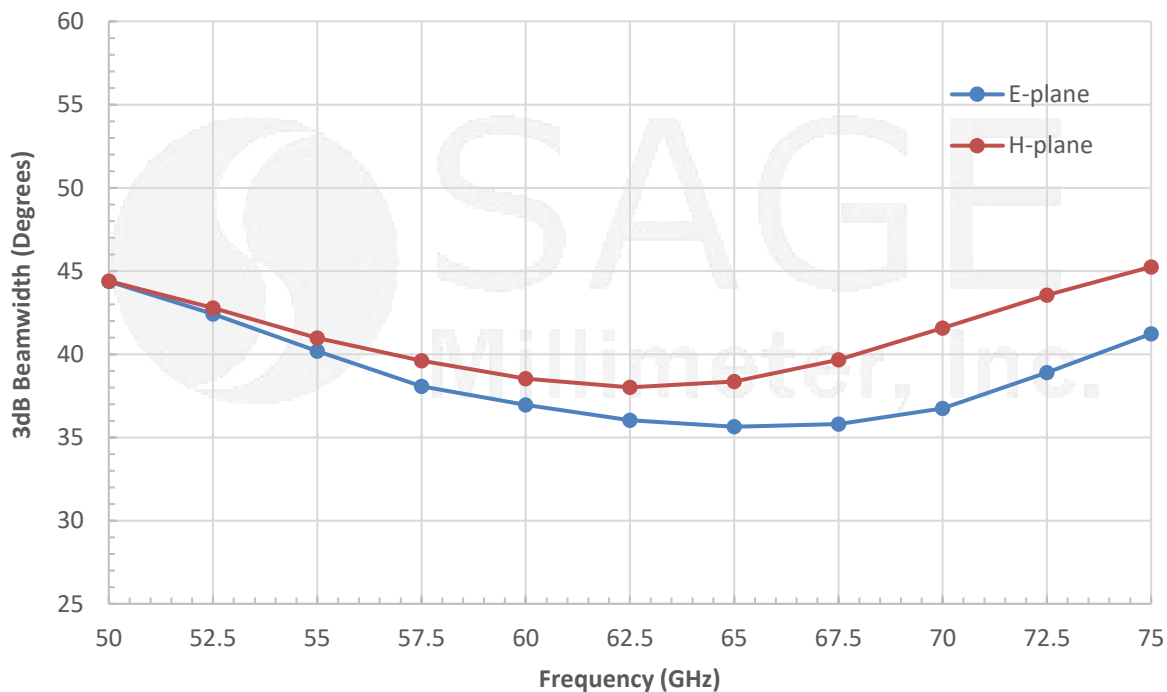V Band Scalar Feed Horn Antenna, 50 to 75 GHz**Simulated Return Loss vs. Frequency****Simulated E and H Plane 3dB Beamwidth vs. Frequency**

V Band Scalar Feed Horn Antenna, 50 to 75 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

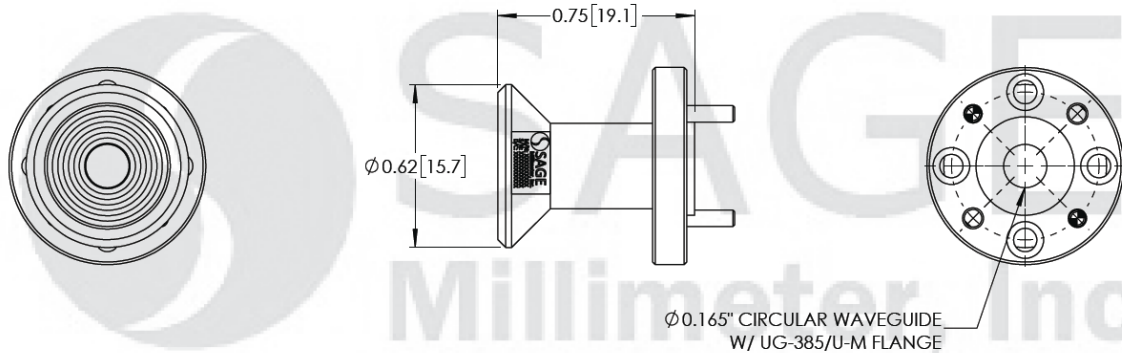

Note:

- All data presented is simulated. Actual data may vary slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.