

SAG-3234033802-250-S1

Ka Band Gaussian Optics Antenna, 32 to 40 GHz, 38 dBi Gain

SAG-3234033802-250-S1 is a 12" Ka-Band Gaussian antenna that operates from 32 to 40 GHz. The Gaussian antenna delivers a 38 dBi nominal gain and 1.9 degree half power beamwidth. The antenna supports both linear and circular polarized waveforms and employs a corrugated feed horn to offer excellent aperture efficiency, high cross polarization rejections, and low sidelobe levels. This model is equipped with a 0.250" diameter circular waveguide and UG-599/U flange as its input port. By adding a mode transition, Eravant model number **SWT-28250-SB**, the input port becomes a standard WR-28 waveguide, which can only support linear polarized waveforms.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	32 GHz		40 GHz
Gain		38 dBi	
3 dB Beamwidth		1.9°	
Sidelobes		-25 dB	-20 dB
Cross Polarization		-20 dB	
Polarization	Linear and Circular		
Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	0.250" Dia Circular Waveguide with UG-599/U Flange
Lens Diameter	12.0"
Material	Aluminum
Finish	Black Anodized
Weight	19.5 lb.
Outline	AG-CA38-250

ECCN

EAR99

FEATURES

- Center Fed
- Low sidelobes
- Low cross polarization

APPLICATIONS


- Radar systems
- Communication systems
- Plasma systems

SUPPLEMENTAL DETAILS




SAG-3234033802-250-S1


Simulated Patterns at 32 GHz

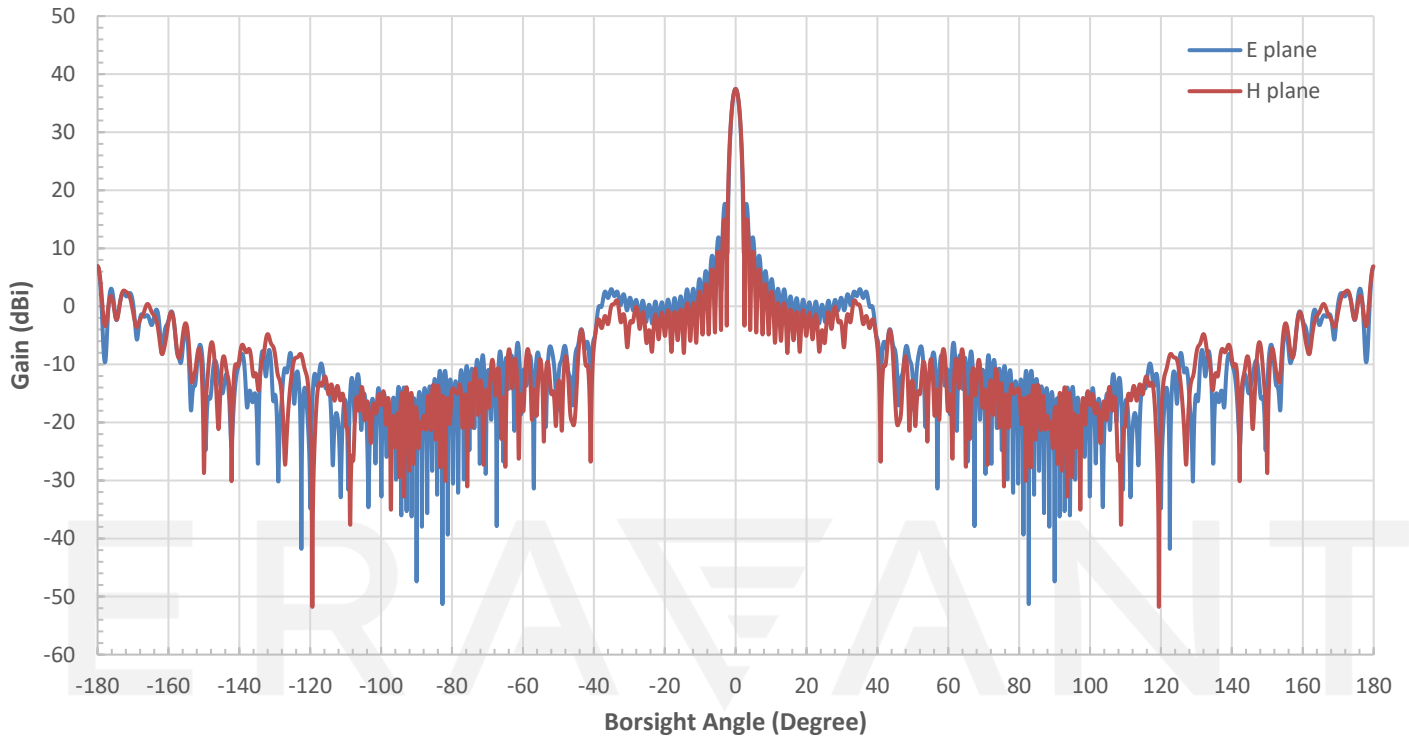


Simulated Patterns at 36 GHz

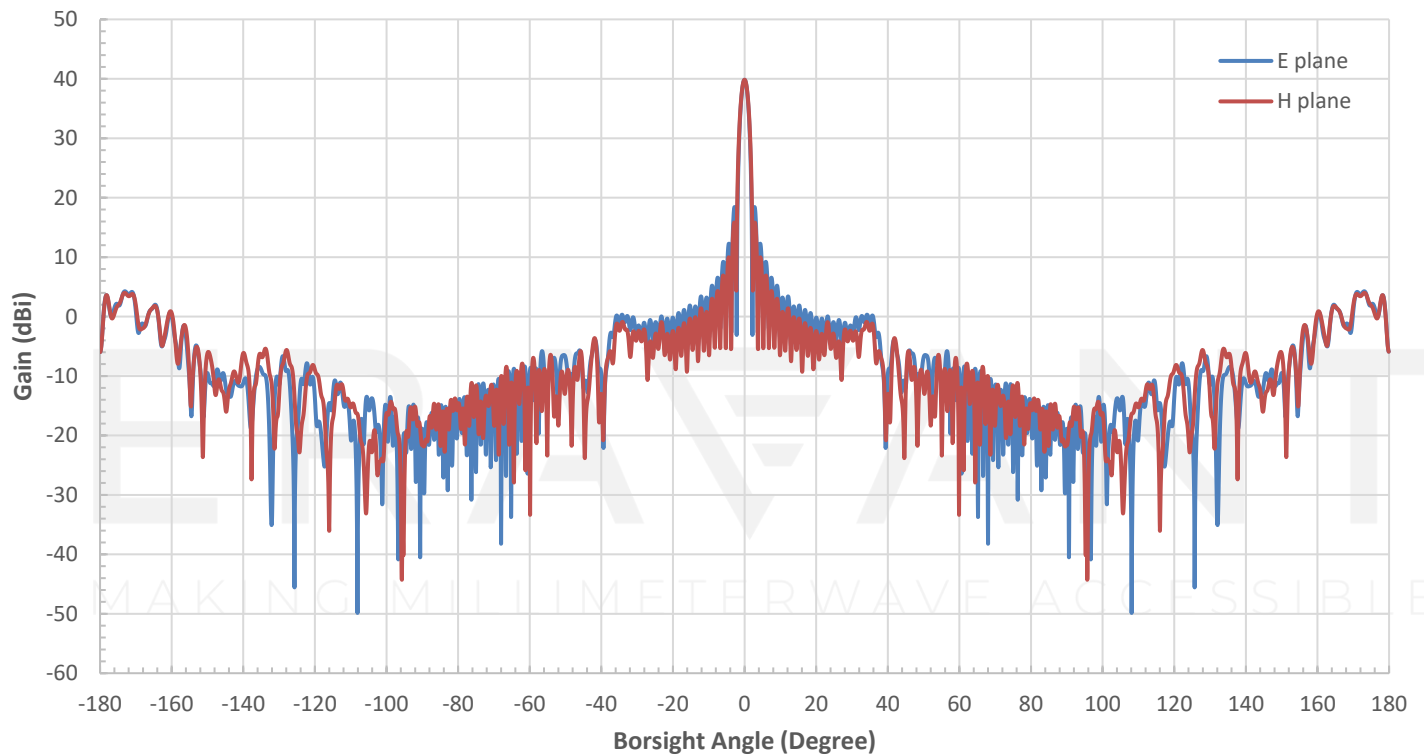


Simulated Patterns at 40 GHz

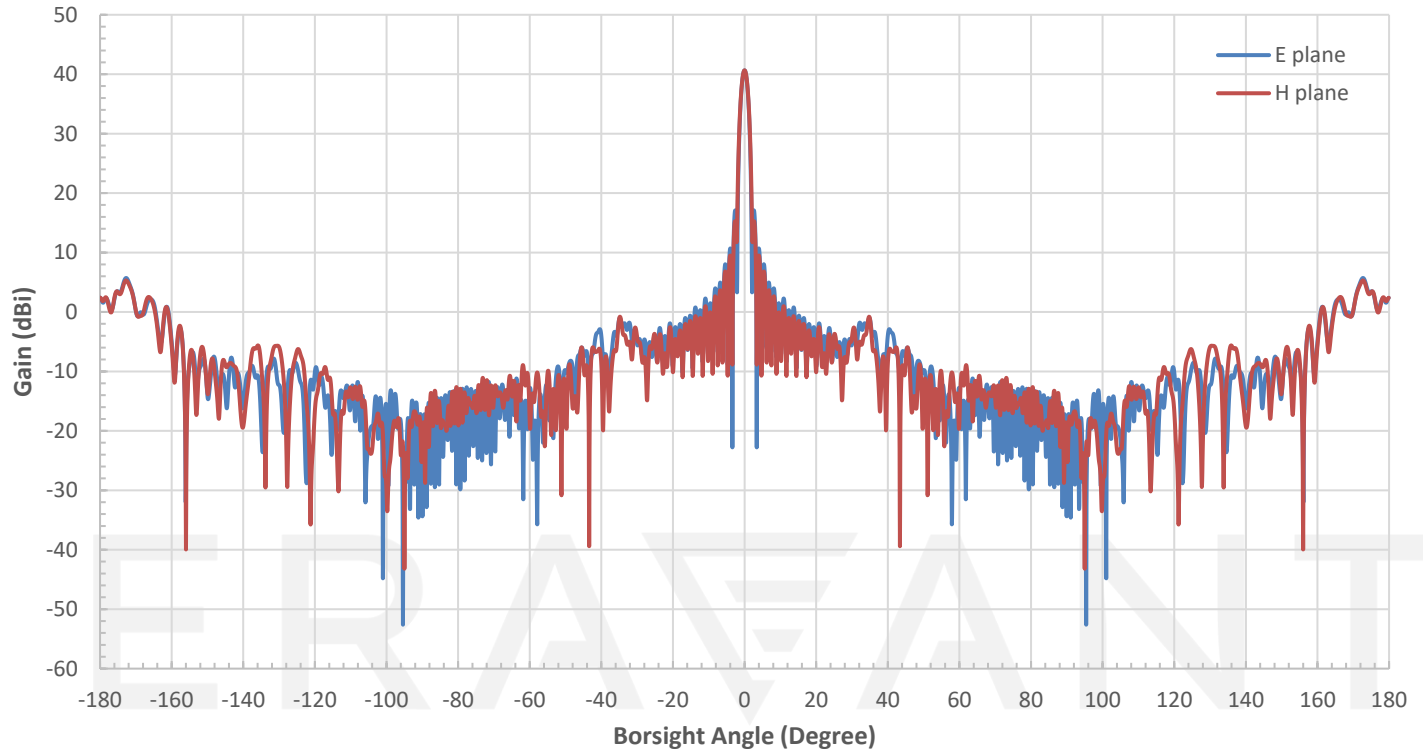


Simulated Gain vs Frequency

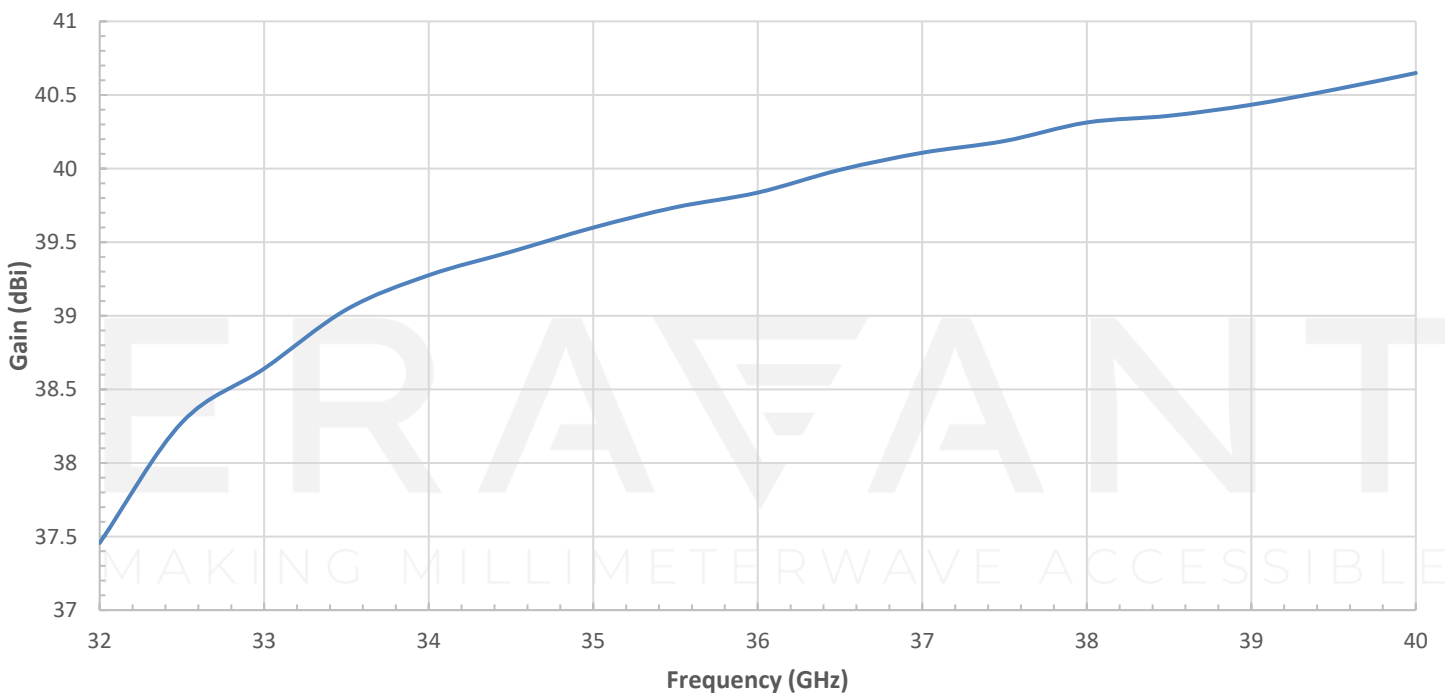

Simulated 3dB Beamwidth vs Frequency

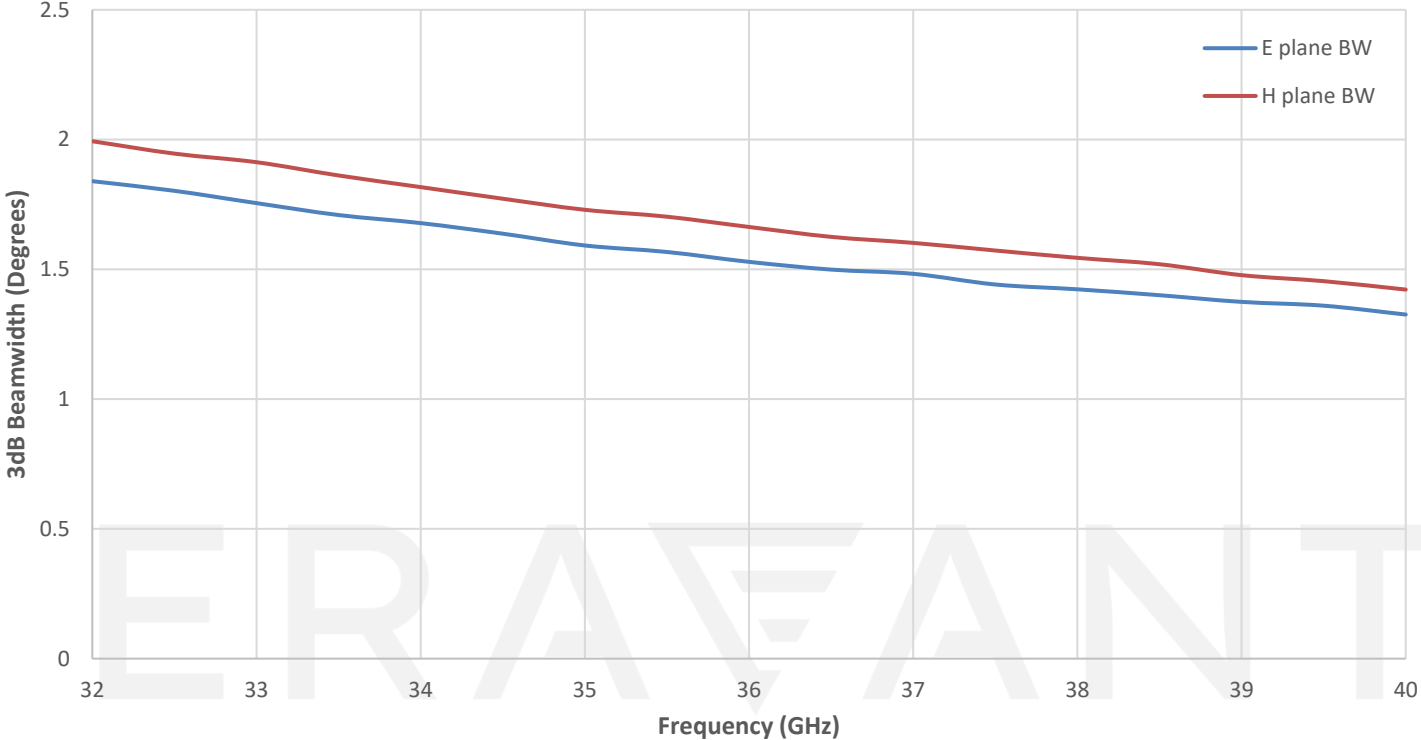


Measured Return Loss vs Frequency

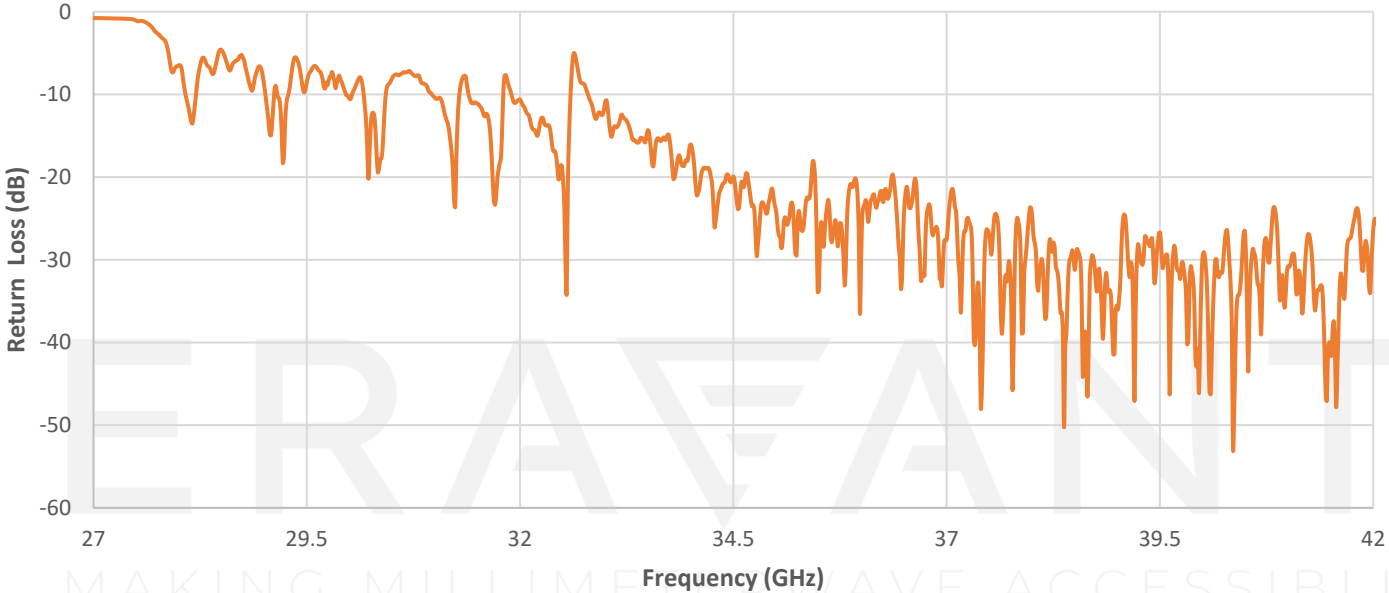

SAG-3234033802-250-S1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

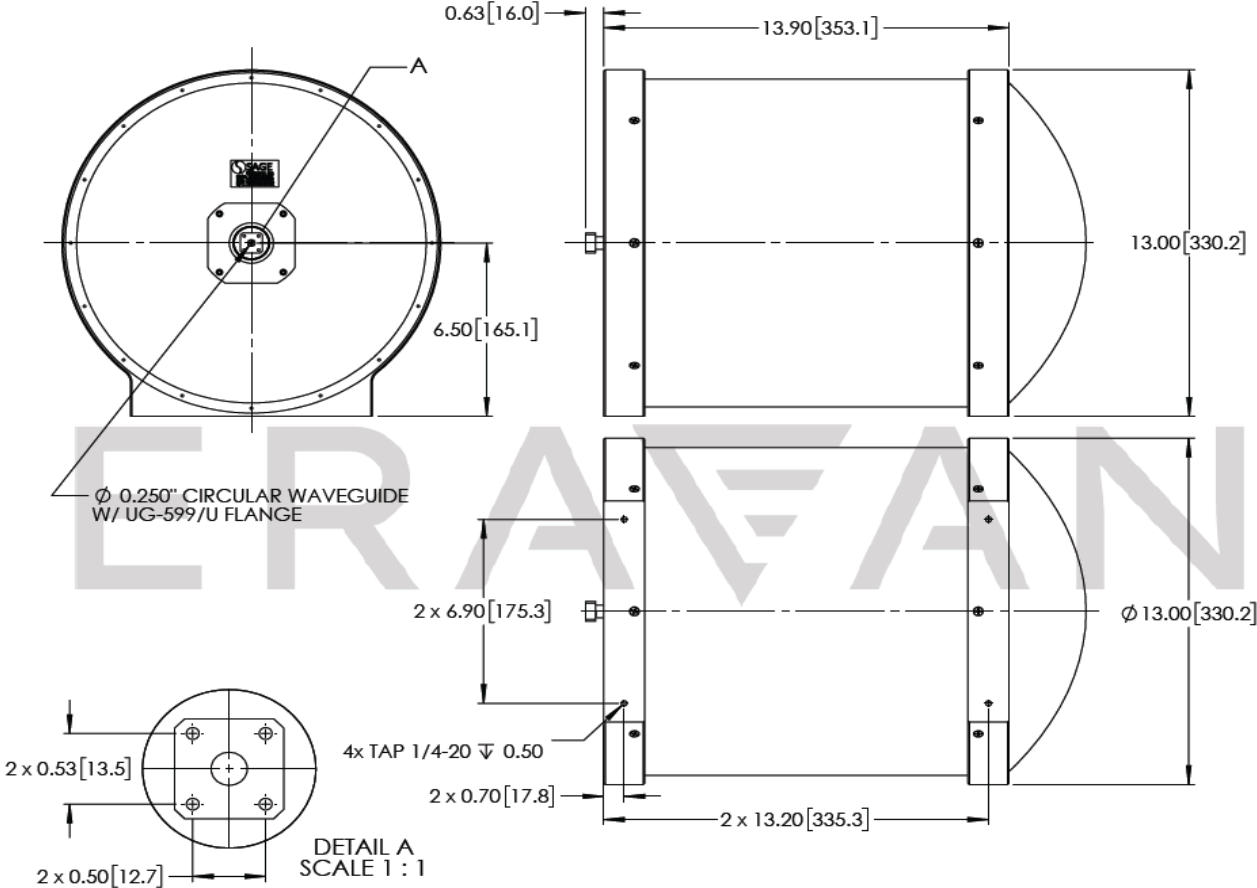

NOTE:

- Test data provided is from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE