



Ka Band Scalar Feed Horn Antenna, 24 to 42 GHz, 15 dBi Gain

Description:

Model SAF-2434031535-358-X1 is a Ka-band scalar feed horn antenna that operates from 24 to 42 GHz. The antenna offers a 15 dBi nominal gain, 35 degree typical half power beamwidth. The nominal side lobe levels are -25 dB or lower. The scalar feed horn is equipped with a 0.358" diameter circular waveguide with UG-599/U flange that supports both linear and circular polarized waveforms. A rectangular waveguide port configuration that only supports linear polarization is available under a different model number.



Features:

- Ultra Broadband Operation
- Low Side Lobe Level
- High Return Loss
- Linear and Circular Polarization

Applications:

- Feed Horn for Gaussian Optical Antennas
- Feed Horn for Cassegrain Antennas
- Rapid System Setups
- Engineering Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	24 GHz	33 GHz	42 GHz
Gain		15 dB	
3 dB Beamwidth, E-plane		35°	
3 dB Beamwidth, H-plane		35°	
E/H Symmetry		7 dB	
Side Lobes, E-plane		-15 dB	
Side Lobes, H-plane		-23 dB	
Return Loss		20 dB	
Polarization	Linear and Circular		
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.358" Diameter Circular Waveguide
Flange Type	UG-599/U
Material	Brass
Finish	Black Paint
Weight	3.1 Oz
Size	1.70" (L) X 1.51" (Ø)
Outline	AF-CA15-358-BX1






Ka Band Scalar Feed Horn Antenna, 24 to 42 GHz, 15 dBi Gain

Typical Measured E/H Antenna Pattern @ 24 GHz

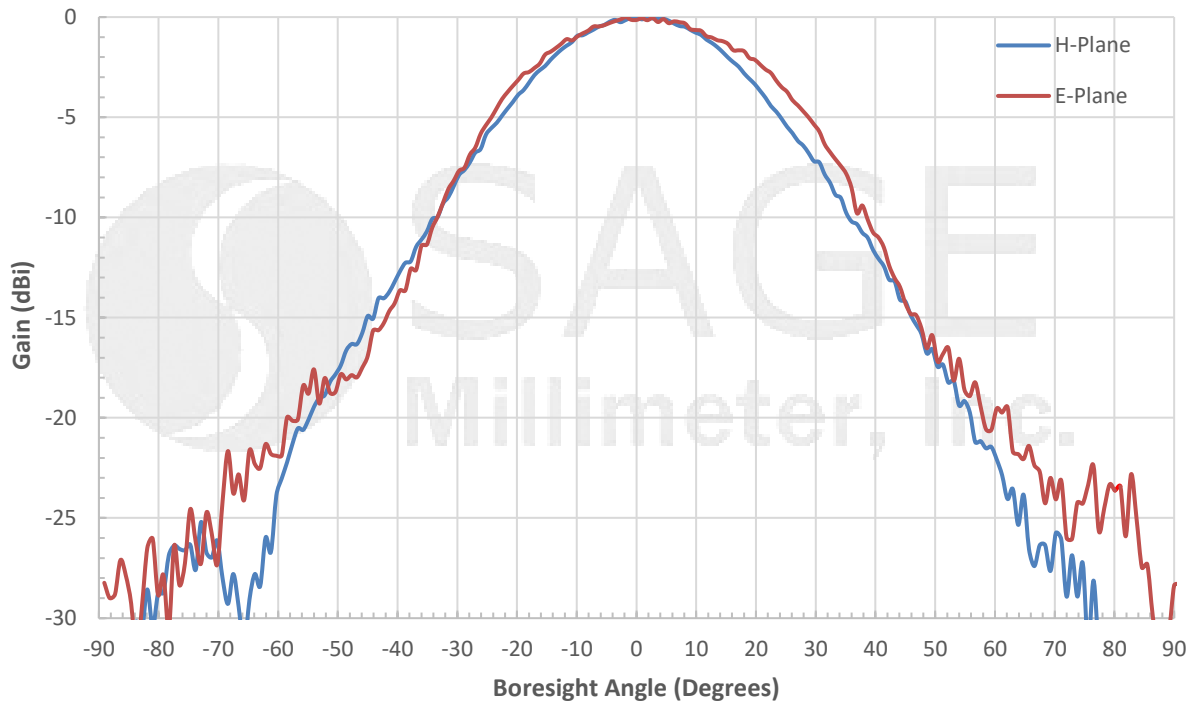


Typical Measured E/H Antenna Pattern @ 30 GHz

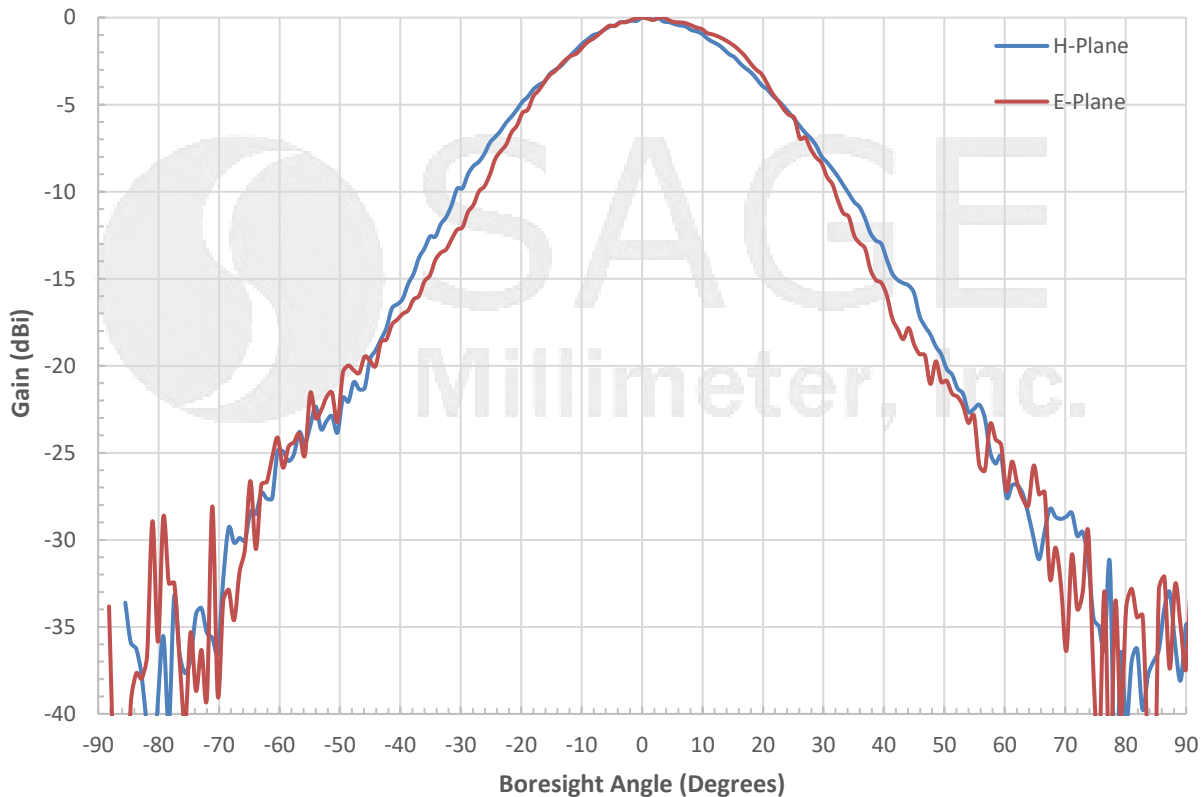




Ka Band Scalar Feed Horn Antenna, 24 to 42 GHz, 15 dBi Gain

Typical Measured E/H Antenna Pattern @ 36 GHz

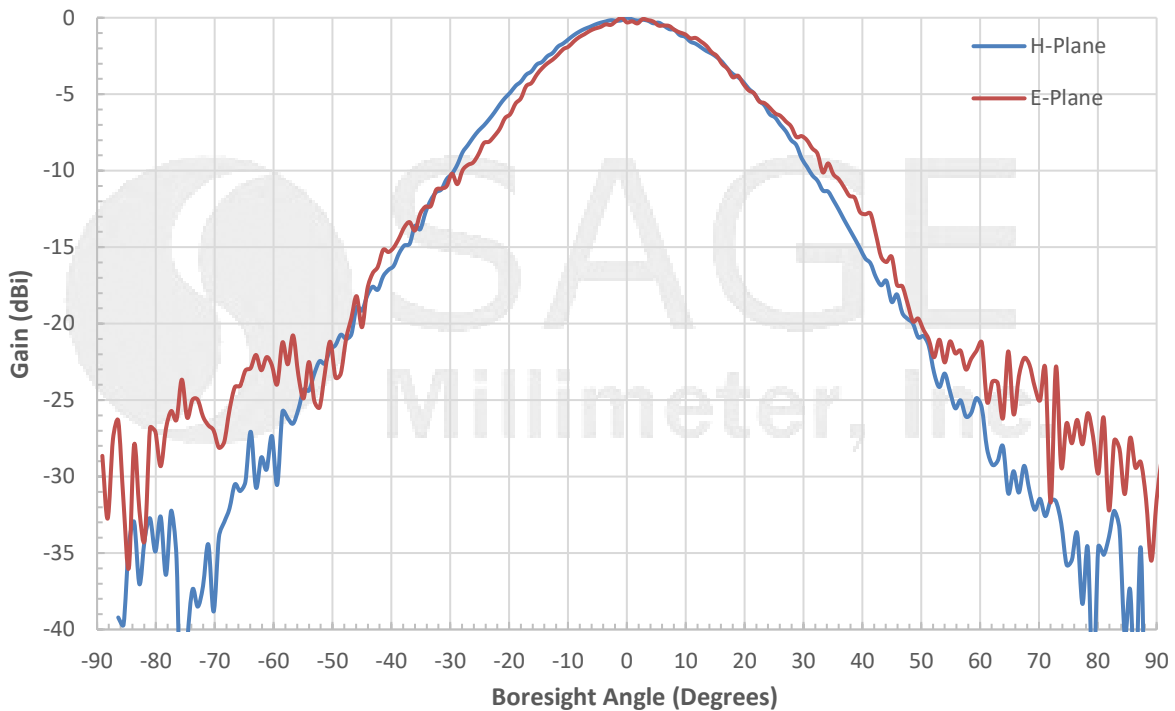

Typical Measured E/H Antenna Pattern @ 42 GHz

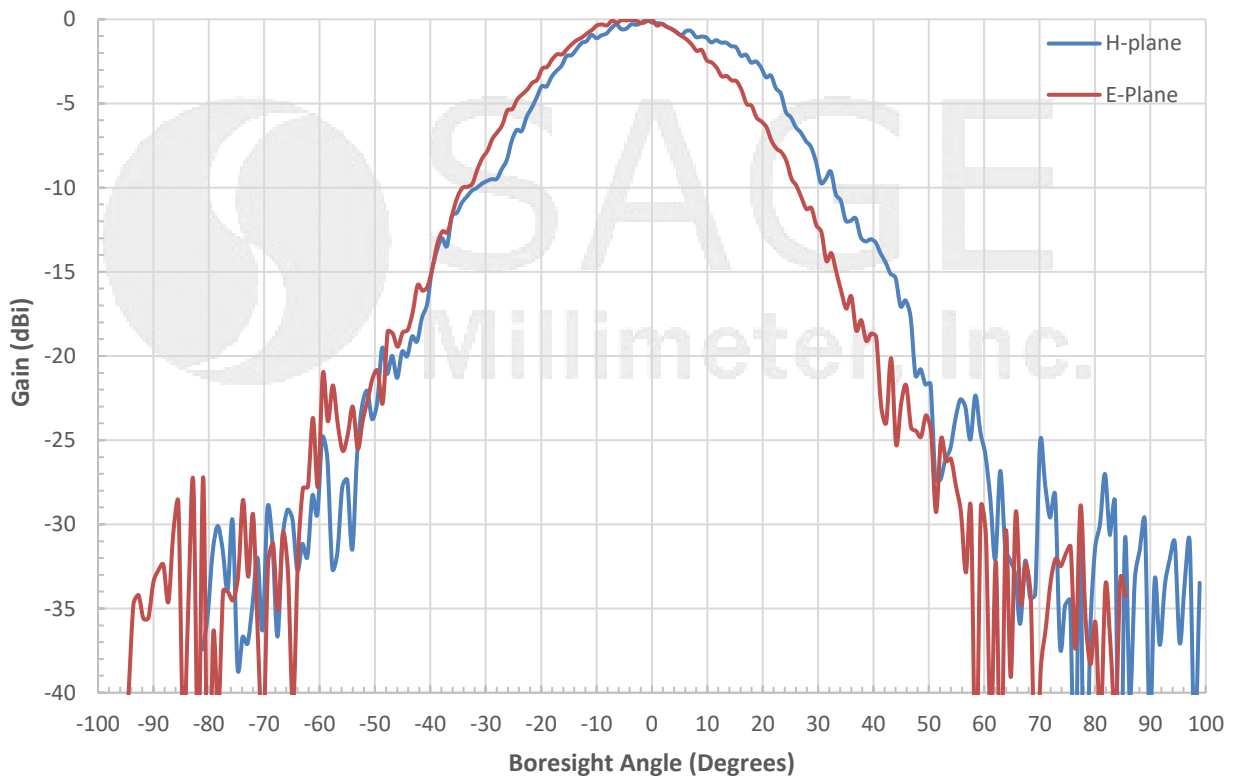


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




Ka Band Scalar Feed Horn Antenna, 24 to 42 GHz, 15 dBi Gain

Simulated Gain vs. Frequency

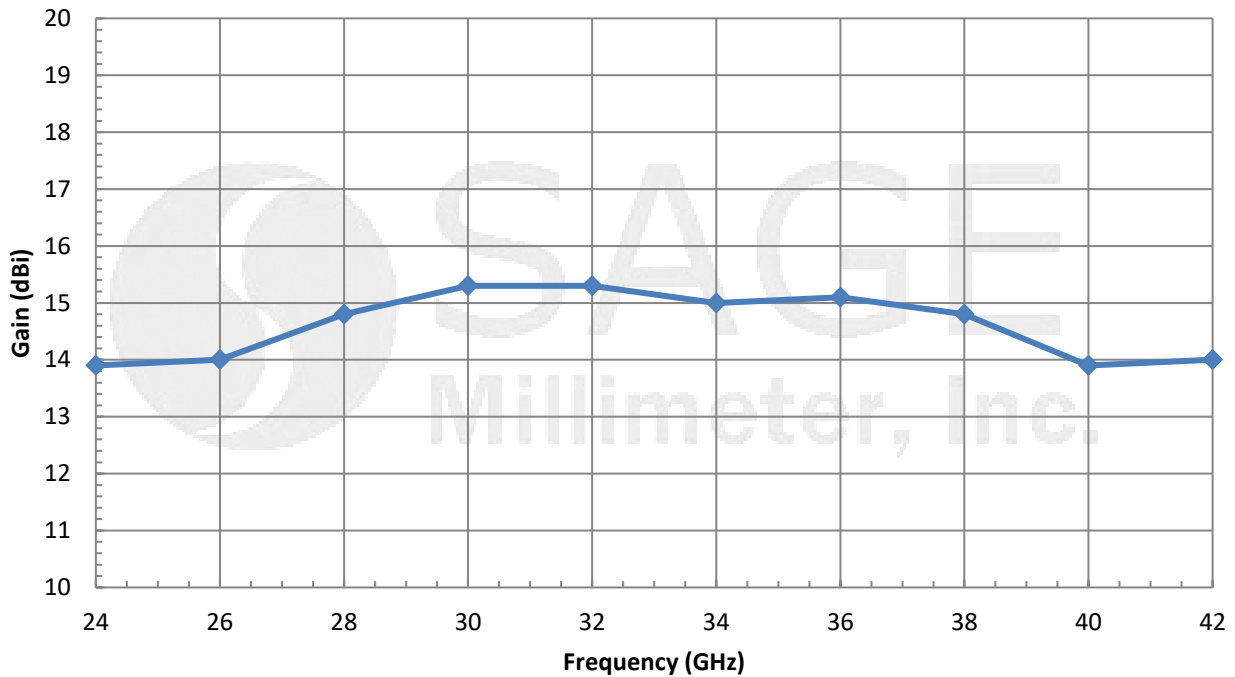


Simulated E and H Plane 3dB Beamwidth vs. Frequency

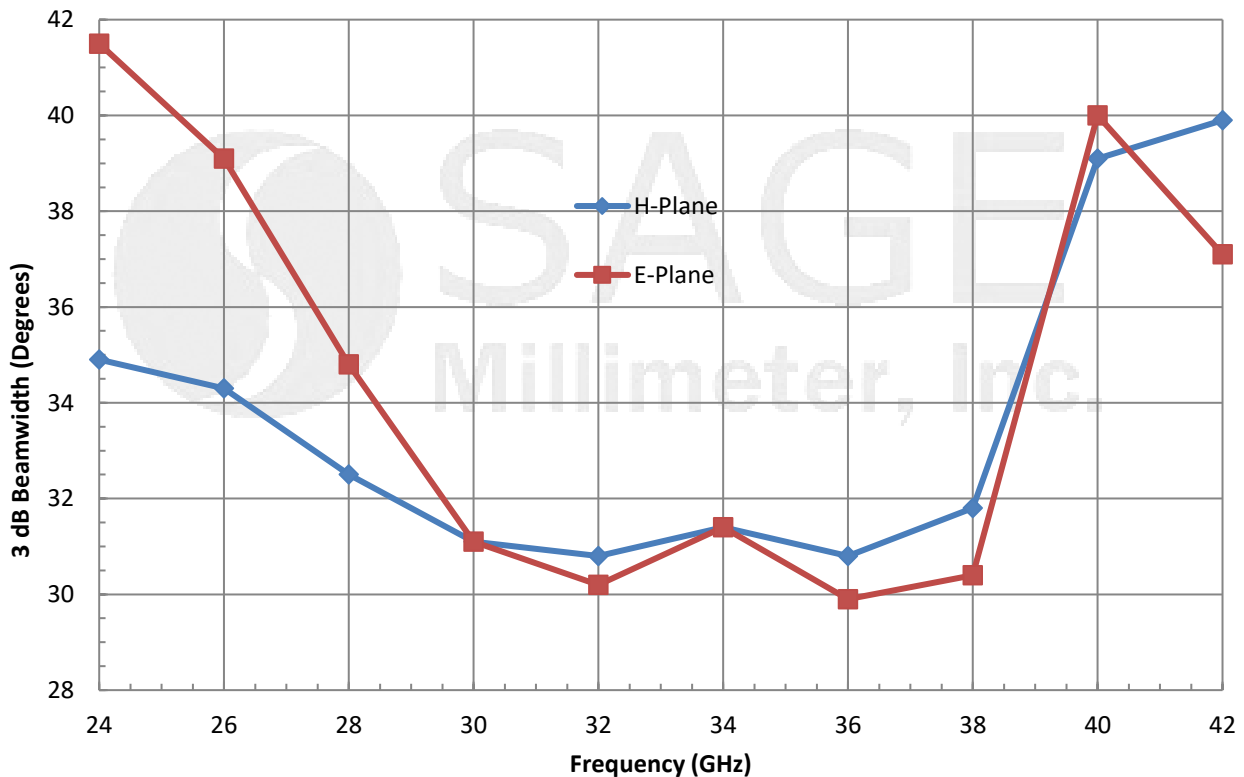




Ka Band Scalar Feed Horn Antenna, 24 to 42 GHz, 15 dBi Gain

Simulated E/H Plane 3 dB Beamwidth Asymmetry vs. Frequency

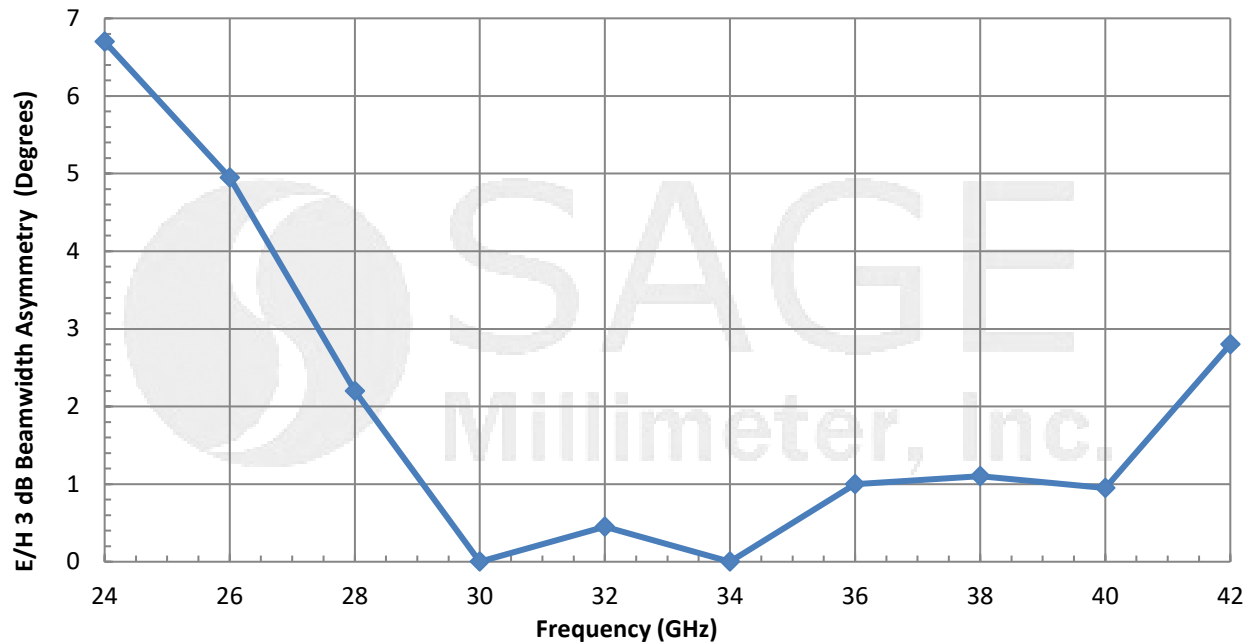

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

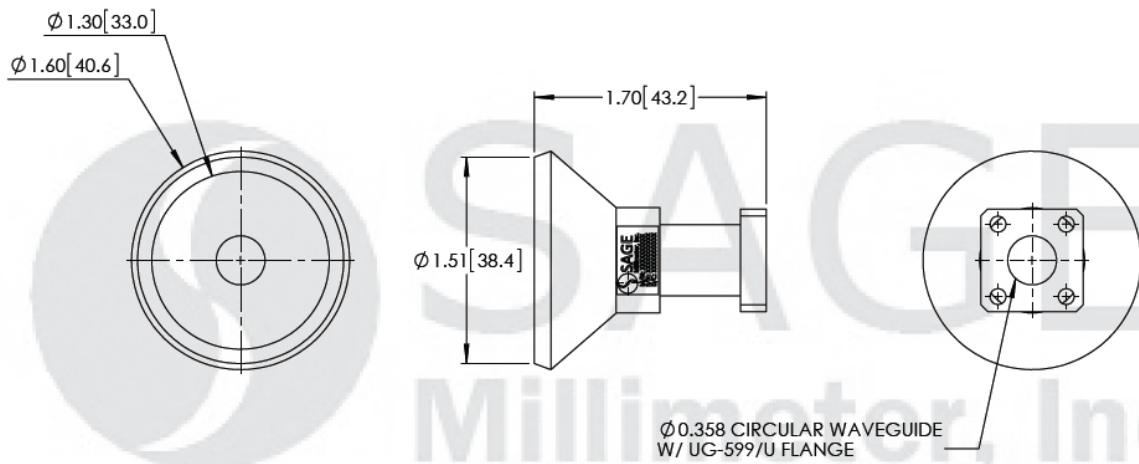

Note:

- The antenna patterns presented are collected from a sample lot. Actual data may vary unit to unit.
- Other data presented is simulated. Actual data may vary.
- All testing was performed under +25°C room temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com