



WR-15 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm (V) Coax Input

Description:

Models SAR-2013-15VF-R2 and SAR-2013-15VM-R2 are V-band pyramidal horn antennas equipped with right angle (90°) 1.85 mm coax connectors to cover the frequency range of 50 GHz to 70 GHz. The antennas offer 20 dBi nominal gain and a typical half power beamwidth of 14 degrees on the E-plane and 15 degrees on the H-plane. The antennas only support linear polarized waveforms. End launch (180°) 1.85 mm coax connector configurations are available under the models SAR-2013-15VF-E2 and SAR-2013-15VM-E2.



Features:

- Right Angle Configuration
- Linear Polarization
- DC Open Circuit at Input

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		70 GHz
Gain		20 dBi	
Polarization	Linear		
3 dB Beamwidth, E-Plane		14°	
3 dB Beamwidth, H-Plane		15°	
Sidelobes, E-Plane		-10 dB	
Sidelobes, H-Plane		-20 dB	
Return Loss		15 dB	
Power Handling			30 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	1.85 mm Female for Model Number: SAR-2013-15VF-R2 1.85 mm Male for Model Number: SAR-2013-15VM-R2
Material	Brass
Finish	Gold Plated
Weight	1.8 Oz
Size	2.25" (L) X 0.93" (W) X 0.75" (H)
Outline	AR-VC1-R






WR-15 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm (V) Coax Input

Simulated Antenna Pattern @ 60 GHz

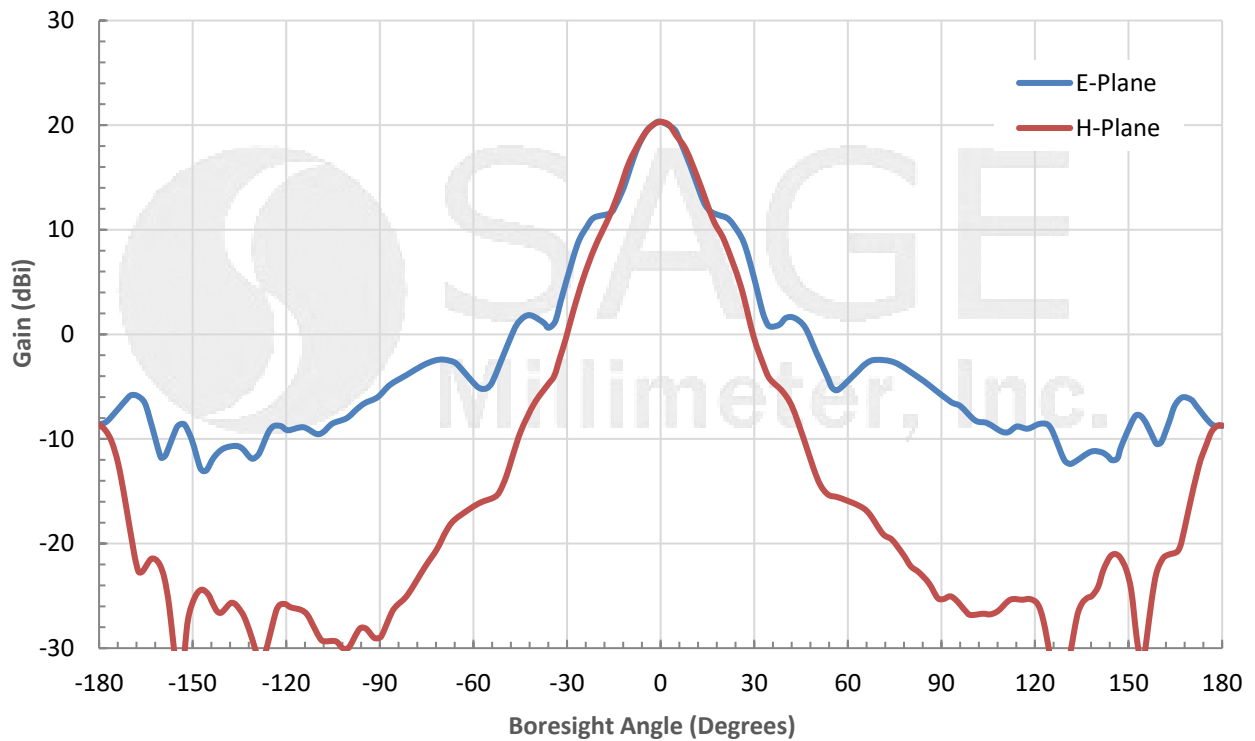


Simulated Gain vs. Frequency

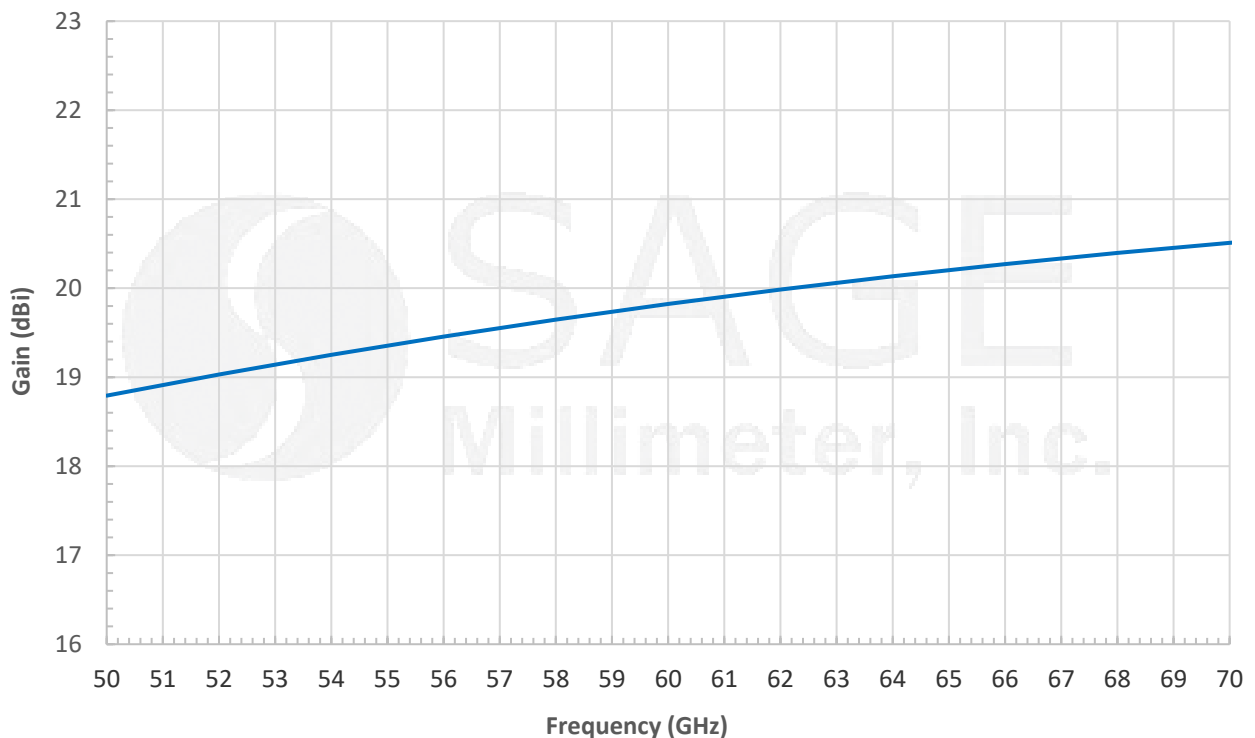




WR-15 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm (V) Coax Input

Typical Return Loss vs Frequency

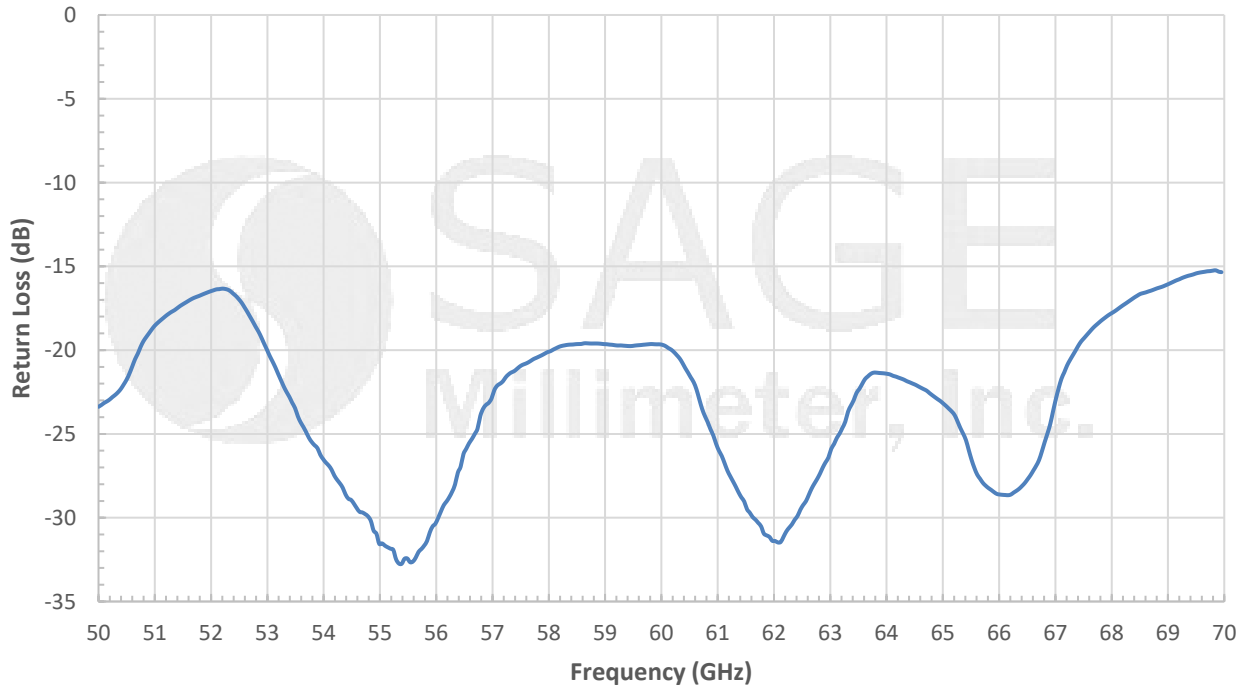

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

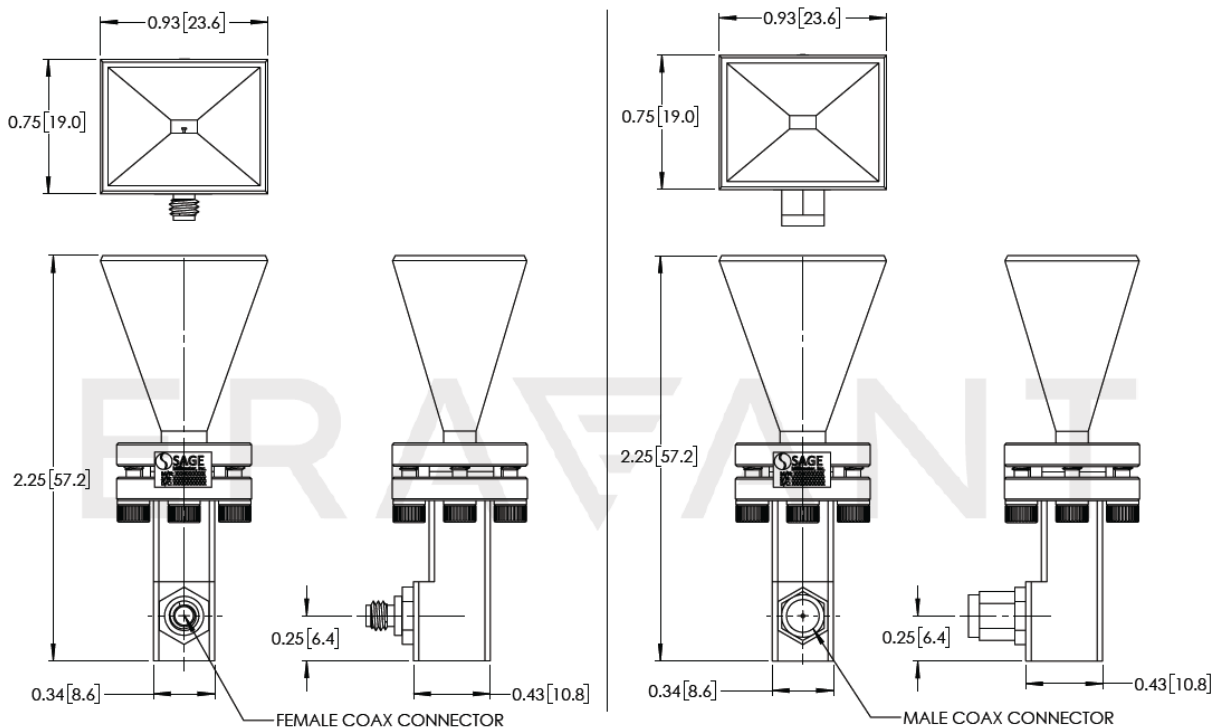



WR-15 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm (V) Coax Input

Note:

- The antenna patterns and gain data presented are simulated. Actual data may vary slightly.
- The return loss data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C room temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

