



WR-22 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm Coax Input

Description:

Models SAR-2013-22VF-R2 and SAR-2013-22VM-R2 are Q-band pyramidal horn antennas with right angle (90°) 1.85 mm coax connectors to cover the frequency range of 33.0 GHz to 50 GHz. The antennas offer 20 dBi nominal gain and a typical half power beamwidth of 15 degrees on the E-plane and 16 degrees on the H-plane. The antennas support linear polarized waveforms. End launch (180°) 1.85 mm connector configurations are available under models SAR-2013-22VF-E2 and SAR-2013-22VM-E2.



Features:

- Inline Configuration
- Linear Polarization
- DC Open Circuit at Input

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Gain	18.5 dBi	20 dBi	21 dBi
Polarization	Linear		
3 dB Beamwidth, E-Plane		15°	
3 dB Beamwidth, H-Plane		16°	
Sidelobes, E-Plane		-14 dB	
Sidelobes, H-Plane		-30 dB	
Return Loss		18 dB	
Power Handling			30 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-45 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port (F)	1.85 mm Female for Model Number : SAR-2013-22VF-R2
Antenna Port (M)	1.85 mm Male for Model Number : SAR-2013-22VM-R2
Size	3.00" (L) X 1.35" (W) X 1.07" (H)
Material	Aluminum
Finish	Gold Plated
Connector Material	Stainless Steel
Weight	2.1 Oz
Outline	AR-QC1-R






WR-22 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm Coax Input

Typical Antenna Pattern @ 41.5 GHz

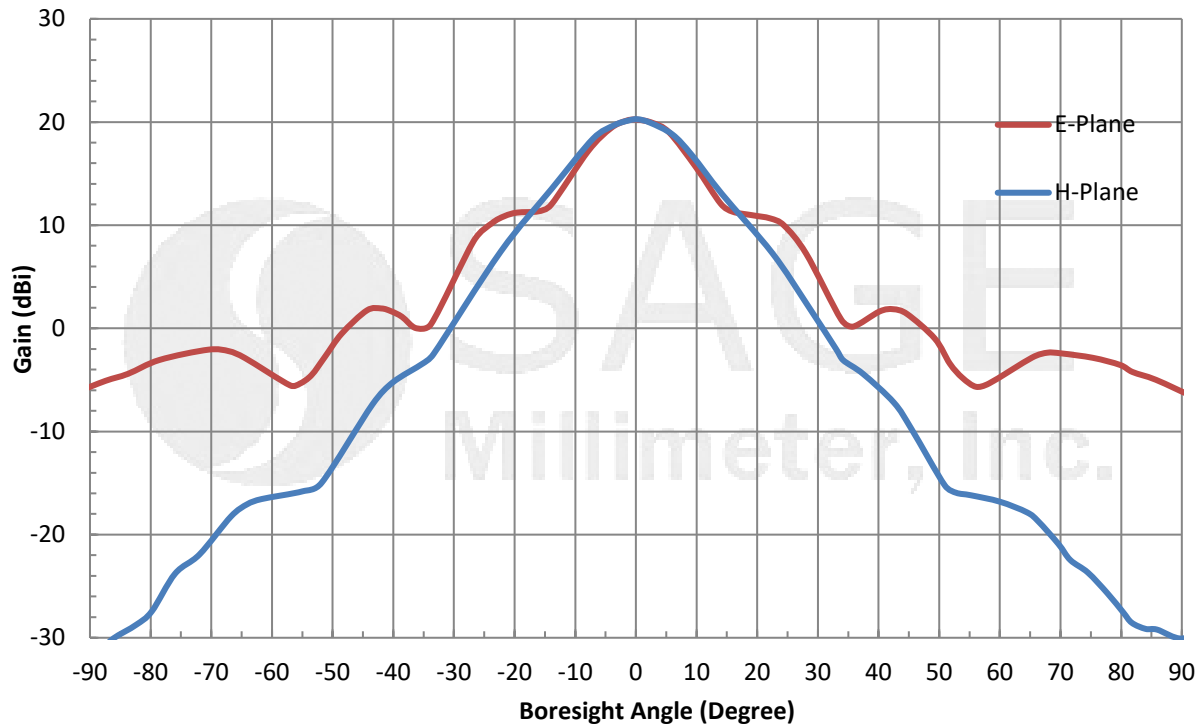


Typical Gain vs. Frequency

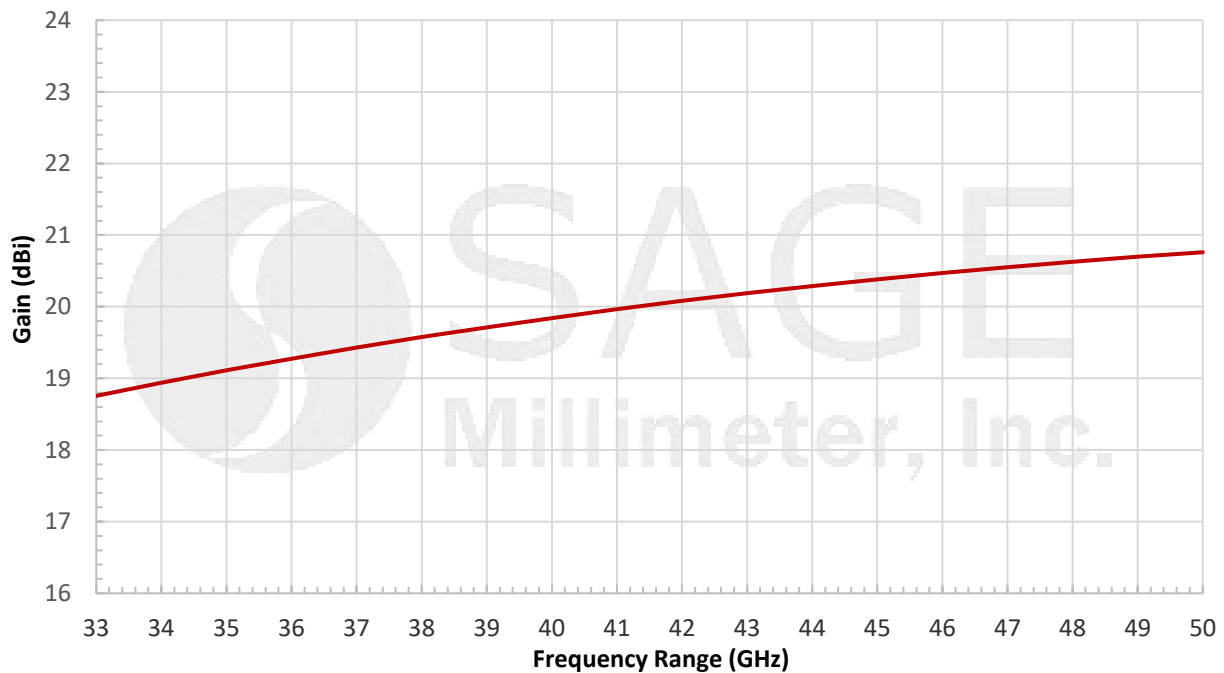




WR-22 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm Coax Input

Typical Measured Return Loss vs Frequency

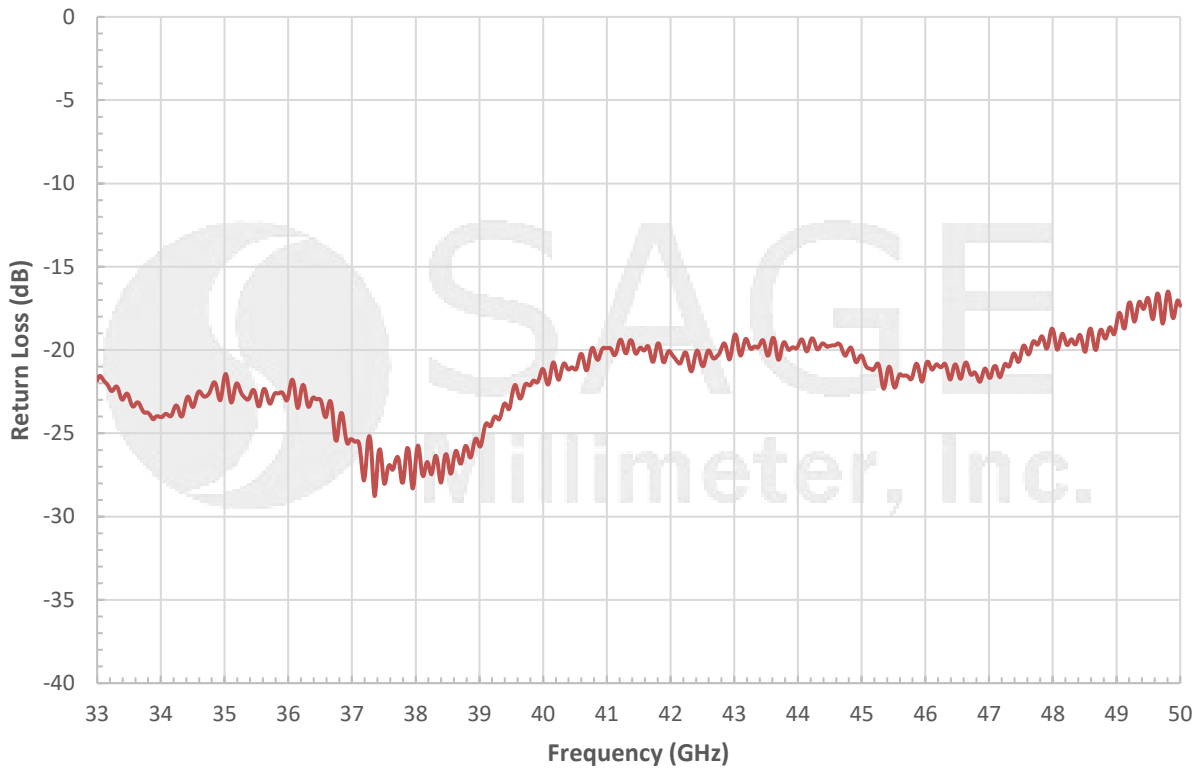

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

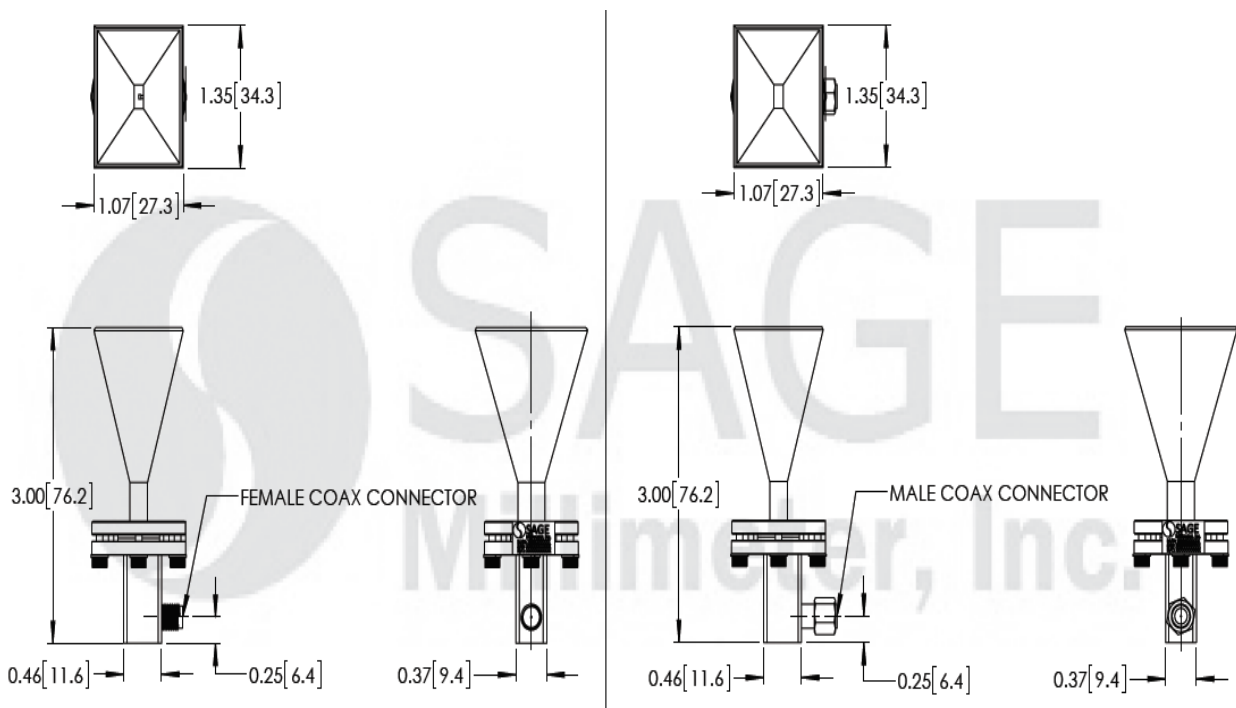

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



WR-22 Pyramidal Horn Antenna, 20 dBi Gain with 1.85 mm Coax Input

Note:

- The antenna patterns presented are simulated. Actual data may vary.
- The return loss data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C room temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

