

WR-08 Pyramidal Horn Antenna, 23 dBi Gain

Description:

Model SAR-2309-08-S2-WP is an F-band pyramidal horn antenna that operates from 90 to 140 GHz. The antenna offers 23 dBi nominal gain and a typical half power beamwidth of 11 degrees on the E-plane and 12 degrees on the H-plane. The antenna supports linear polarized waveforms. The input of this antenna is a WR-08 waveguide with UG-387/U-M flange.



Features:

- Rectangular Waveguide Interface
- Precisely Machined and Gold Plated
- Linear Polarization
- High Return Loss

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	90 GHz		140 GHz
Gain		23 dBi	
Polarization		Linear	
3 dB Beamwidth, E-Plane		11°	
3 dB Beamwidth, H-Plane		12°	
Sidelobes, E-Plane		-14 dB	
Sidelobes, H-Plane		-30 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-08 Waveguide
Flange Type	UG-387/U-M Flange
Size	1.68" (L) X 0.74" (W) X 0.59" (H)
Material	Brass
Finish	Gold Plated
Weight	0.7 Oz
Outline	AR-F2




www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com






WR-08 Pyramidal Horn Antenna, 23 dBi Gain

Simulated Antenna Patterns @ 90 GHz

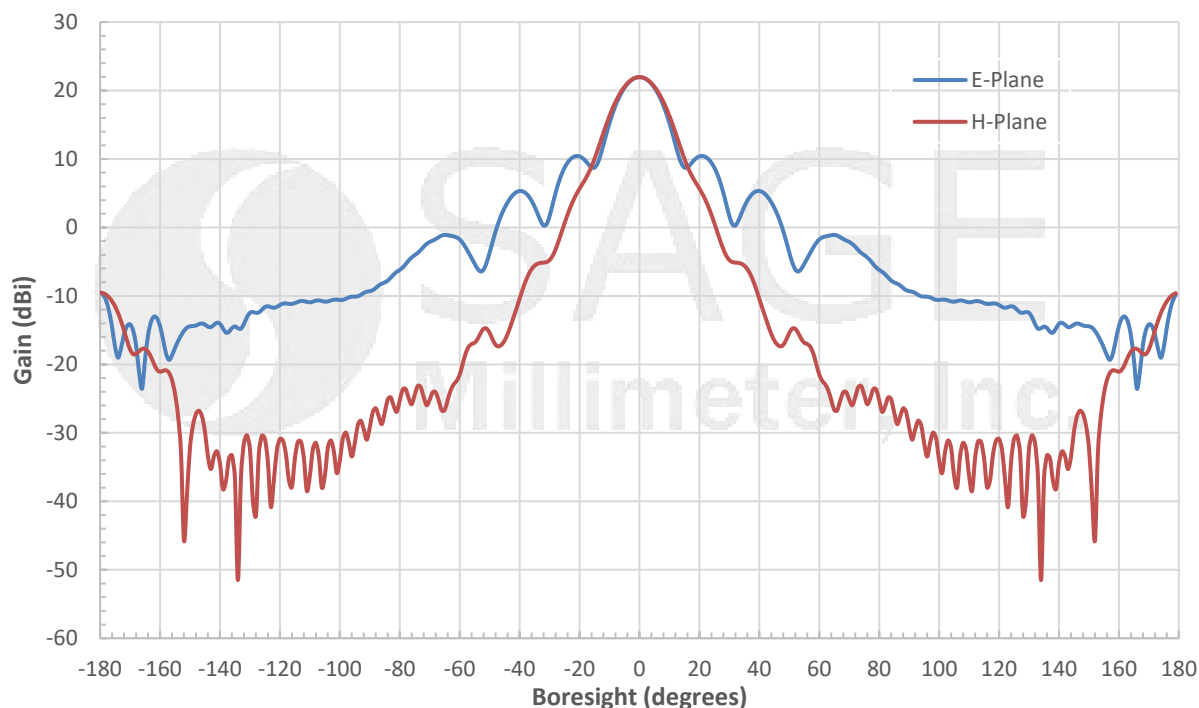


Simulated Antenna Patterns @ 115 GHz

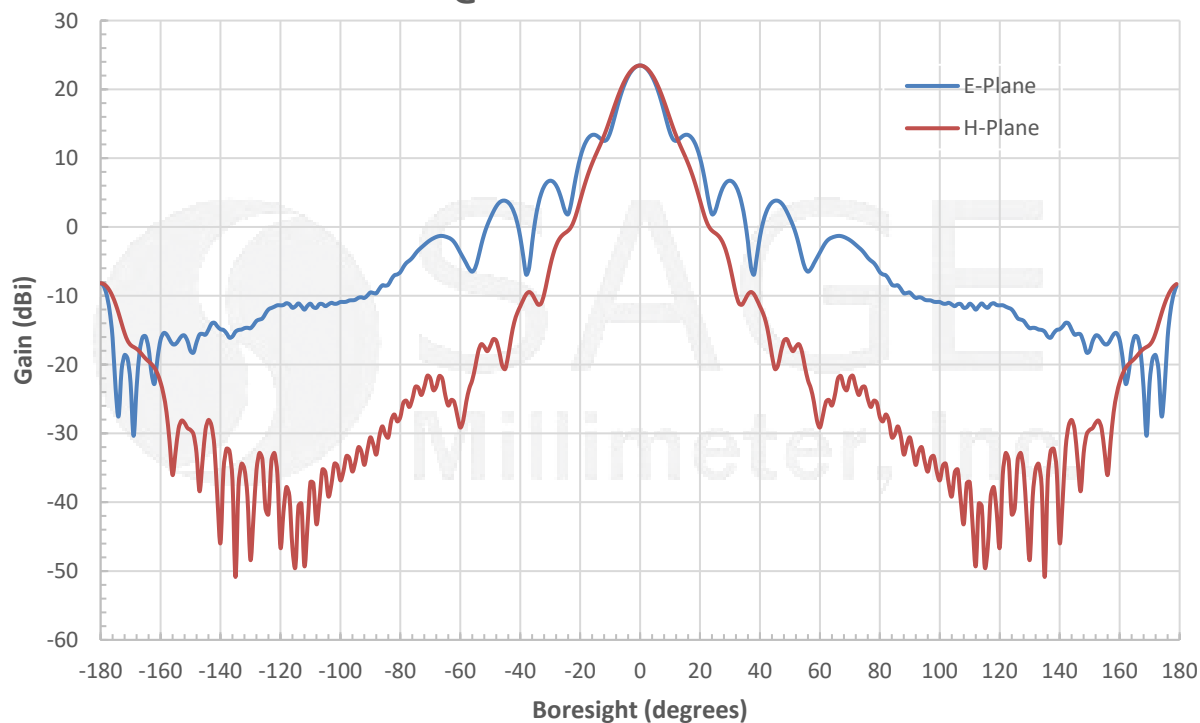

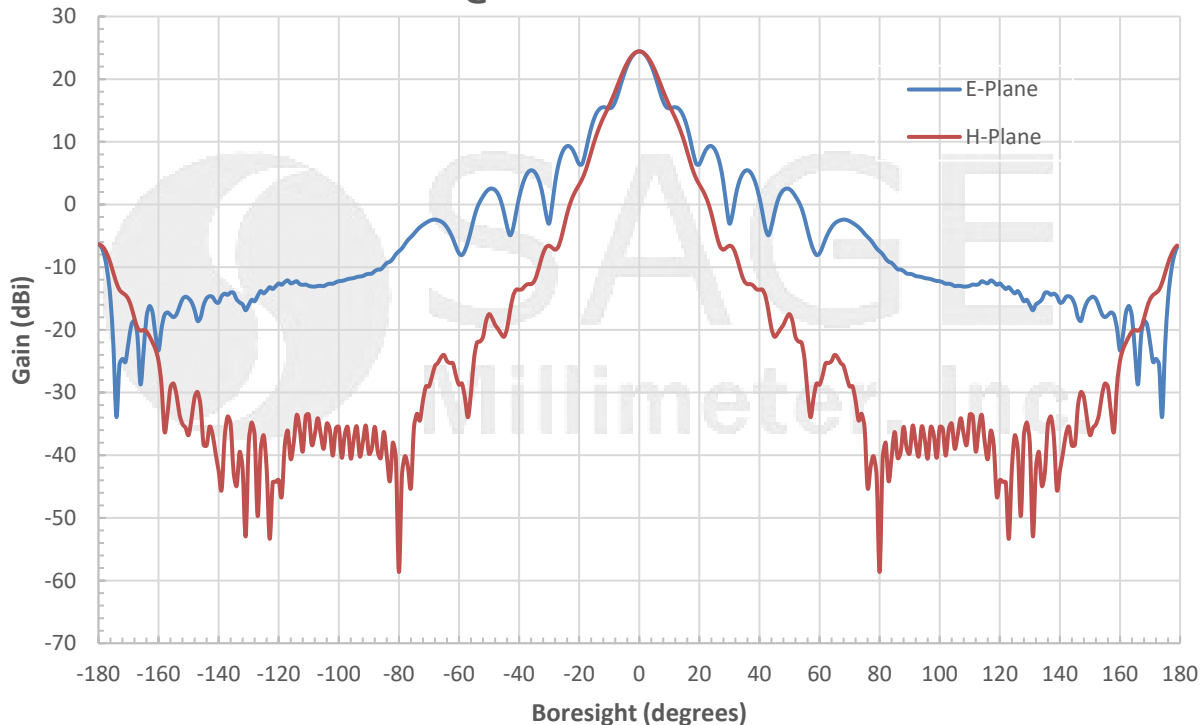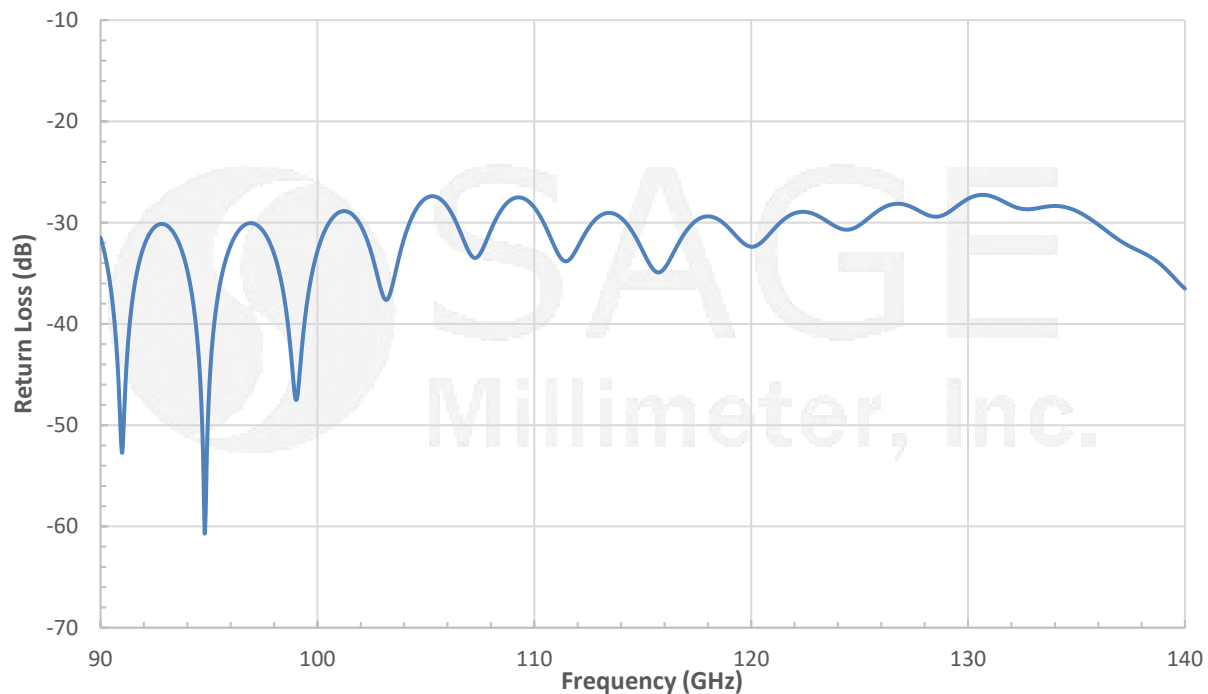
**WR-08 Pyramidal Horn Antenna, 23 dBi Gain****Simulated Antenna Patterns @ 140 GHz****Simulated Return Loss vs. Frequency**

WR-08 Pyramidal Horn Antenna, 23 dBi Gain

Simulated Gain vs. Frequency

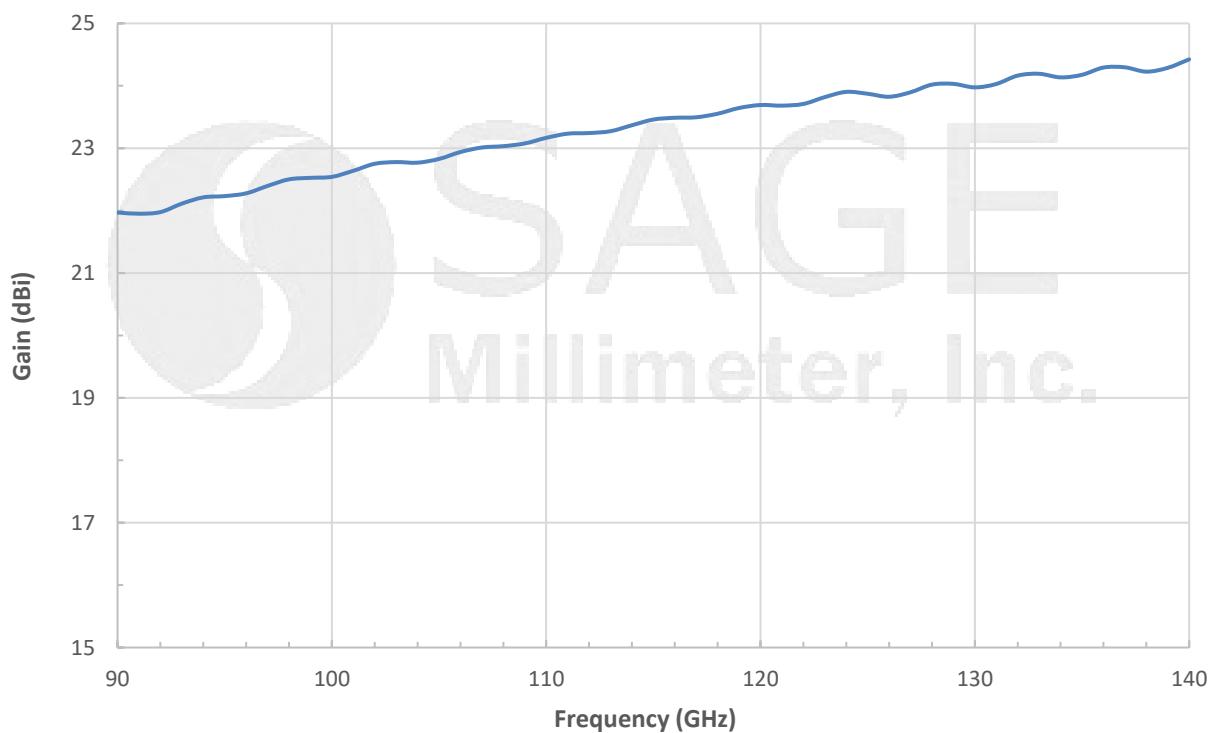

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

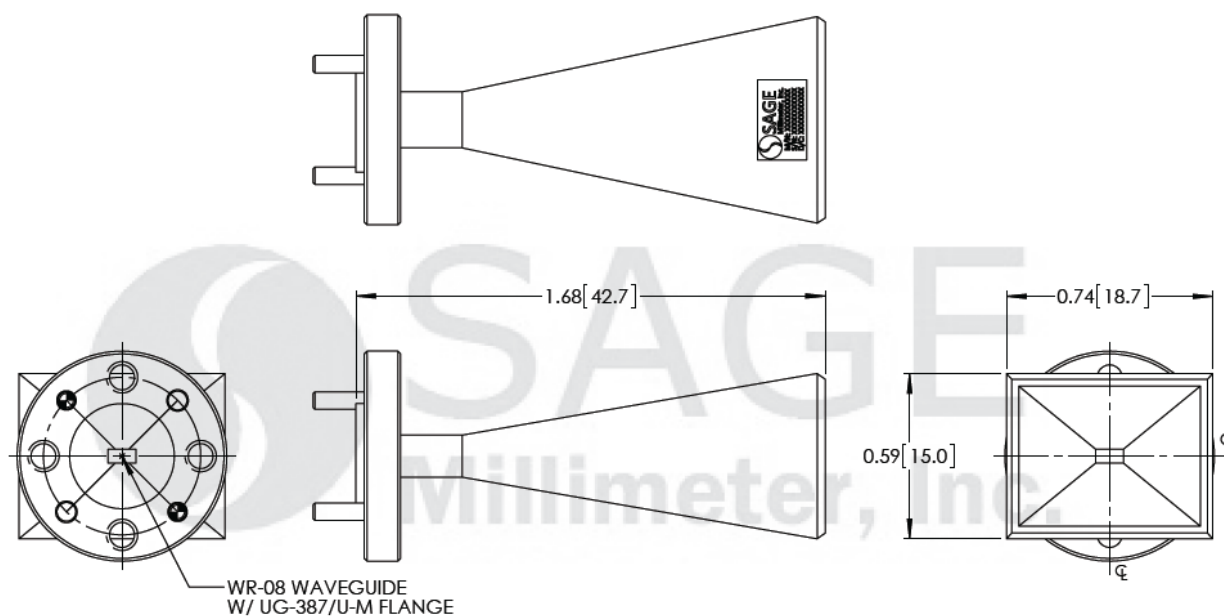

www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com

WR-08 Pyramidal Horn Antenna, 23 dBi Gain

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

