



W-Band Lens Corrected Antenna, 75 to 110 GHz, 30 dBi Gain

Description:

Model SAL-7531143004-10-S1 is a W-band lens corrected antenna that operates from 75 to 110 GHz. At a center frequency of 94 GHz, the antenna delivers 30 dBi nominal gain, 4.3 degrees typical half power beamwidth on the E-plane, and 5.3 degrees typical half power beamwidth on the H-plane. The antenna employs a low loss lens to offer excellent aperture efficiency and low sidelobe levels. The lens corrected antenna is equipped with a standard WR-10 waveguide and UG-387/U-M flange as its input port. It supports linear polarized waveforms.



Features:

- Center Fed
- Low Sidelobes
- Low Cross Polarization

Applications:

- Radar Systems
- Communication Systems
- Sensor Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	75 GHz	94 GHz	110 GHz
Gain		30 dBi	
3 dB Beamwidth, E-Plane		4.3°	
3 dB Beamwidth, H-Plane		5.3°	
Sidelobes, E-Plane		-17 dB	
Sidelobes, H-Plane		-25 dB	
Polarization		Linear	
Return Loss		-25 dB	
Specification Temperature		+25 °C	
Operating Temperature	-45 °C		+85 °C

Mechanical Specifications:


Parameter	Connector
Antenna Port	WR-10 Waveguide with UG-387/U-M Flange
Lens Diameter	1.75"
Dimensions	1.89" (∅) x 3.33" (L)
Horn Material	Aluminum
Finish	Gold Plated
Weight	2.4 Oz
Outline	AL-RW30






W-Band Lens Corrected Antenna, 75 to 110 GHz, 30 dBi Gain

Typical Return Loss vs. Frequency

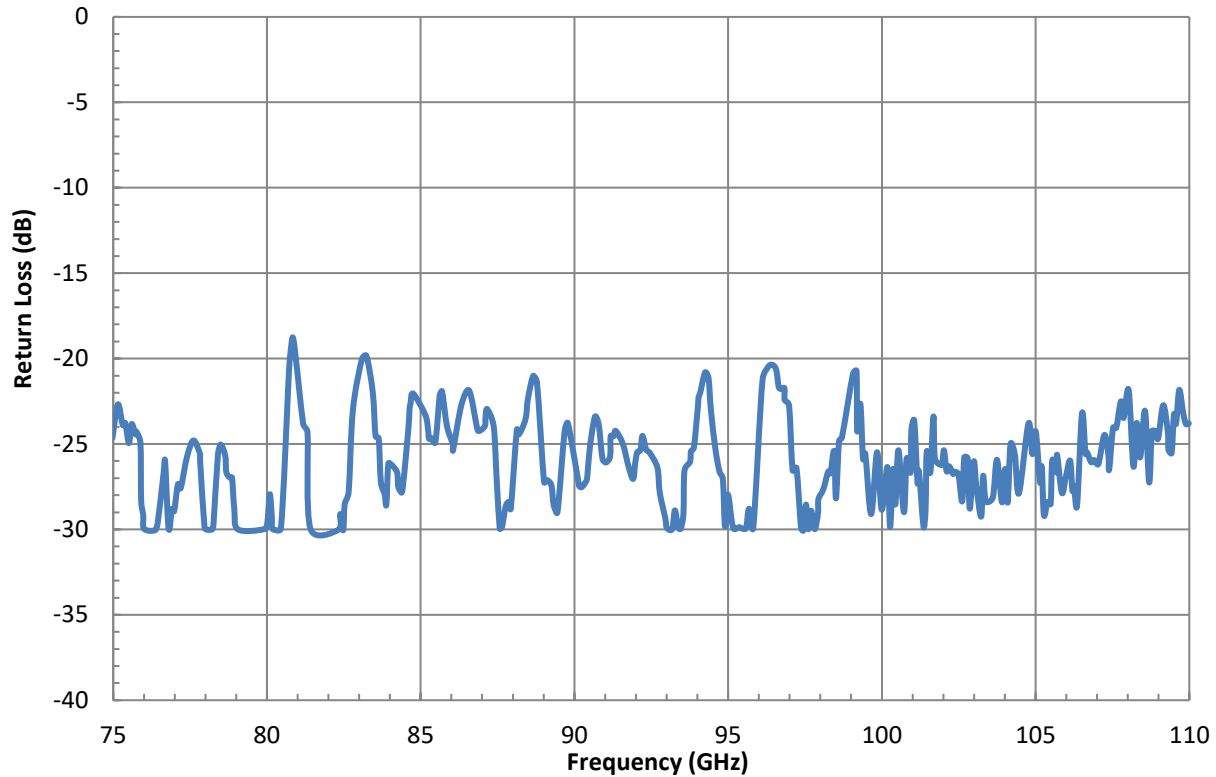


Typical Patterns @ 94 GHz

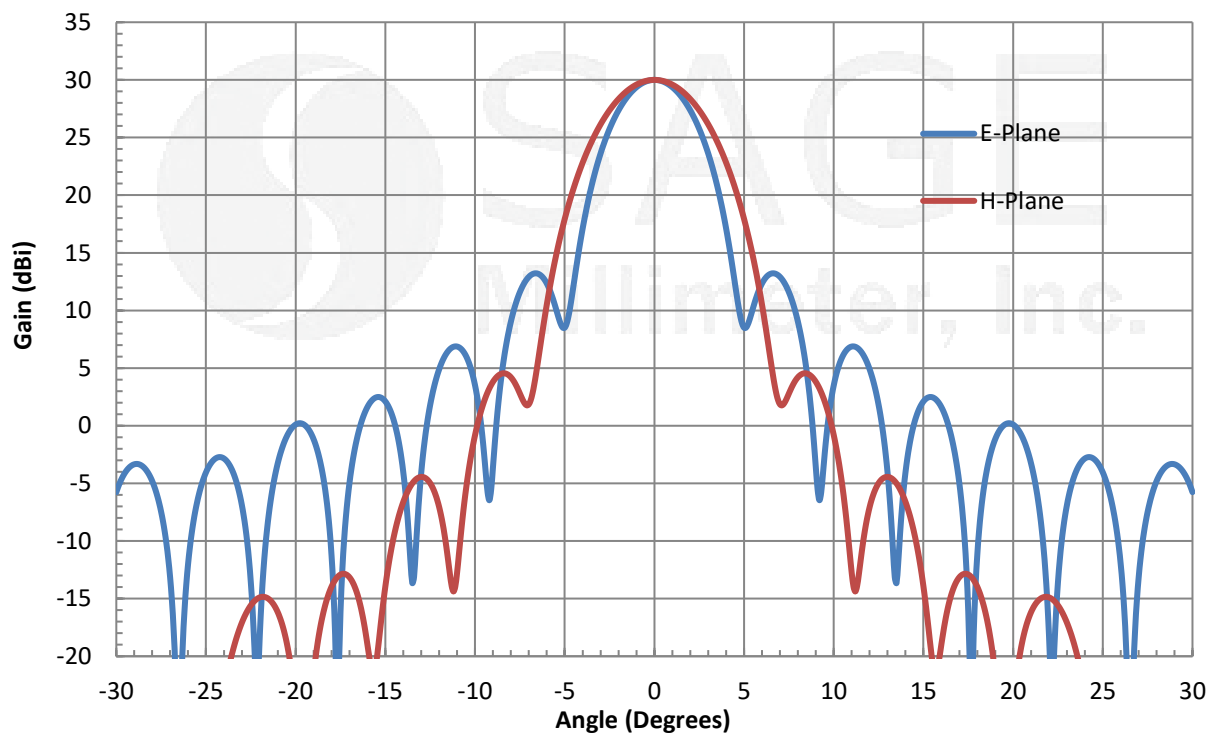

W-Band Lens Corrected Antenna, 75 to 110 GHz, 30 dBi Gain

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

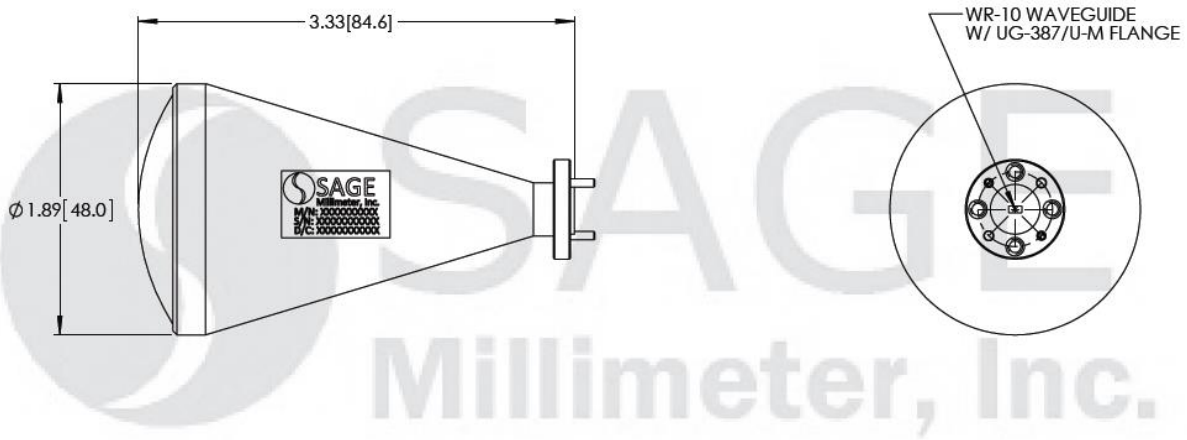

Note:

- Some data presented are simulated. Actual data may vary unit to unit.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Foreign objects in the waveguide will affect the antenna performance and may damage the antenna.

