



WR-08 Orthomode Transducer, 90 to 140 GHz, Square Waveguide

Description

Model SAT-FF-08008-S1 is a WR-08 orthomode transducer (OMT) that operates between 90 and 140 GHz. The OMT separates a circular or elliptical polarized waveform into two linear, orthogonal waveforms or combines two linear polarized waveforms into one circular or elliptical polarized waveform or vice versa. The OMT also supports either vertical or horizontal polarized waveguide forms with 20 dB cross polarization rejections. The OMT shows high port isolation while providing a low insertion loss. The OMT is configured with a 0.080" x 0.080" square waveguide for the antenna port and two WR-08 waveguides for the horizontal and vertical ports. All ports have standard UG-387/U-M flanges and 4-40 threaded holes.



Features:

- High Isolation
- Low Insertion Loss
- Full Band Performance

Applications:

- Radar and Communication Systems
- Antenna Range
- Circular and Linear Waveform Separation and Combination

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	90 GHz		140 GHz
Insertion Loss (A to V Port)		2.0 dB	
Insertion Loss (A to H Port)		2.0 dB	
Isolation (V to H Port)		30 dB	
Cross Polarization (A to V Port)		20 dB	
Cross Polarization (A to H Port)		20 dB	
Return Loss (H Port)		15 dB	
Return Loss (V Port)		15 dB	
Return Loss (A Port, Vertical)		15 dB	
Return Loss (A Port, Horizontal)		15 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.080" x 0.080" Square Waveguide
Horizontal and Vertical Ports	WR-08 Waveguide
Flange Type	UG-387/U-M Flange 4-40 Threaded Holes
Material and Finish	Gold Plated Aluminum
Weight	1.2 Oz
Size	1.30" (L) x 0.80" (W) x 0.80" (H)
Outline	AT-FS-080-F





WR-08 Orthomode Transducer, 90 to 140 GHz, Square Waveguide

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

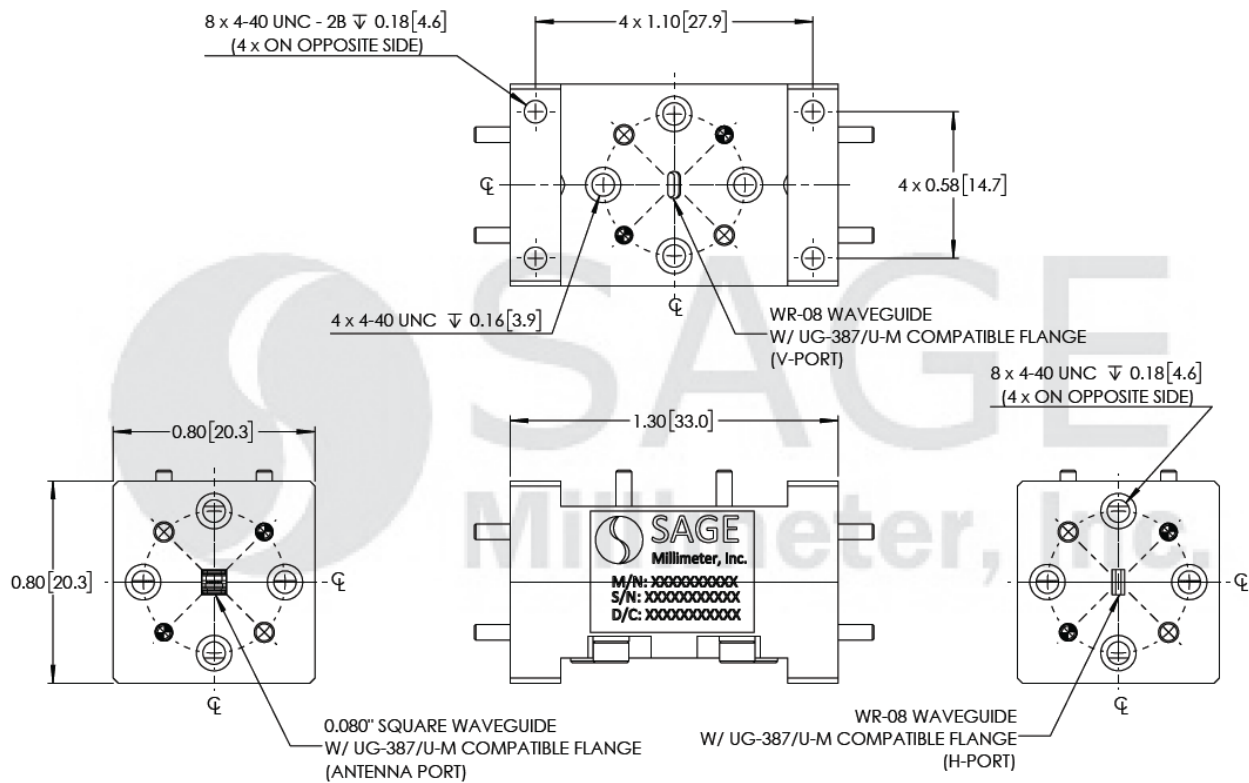

Note:

- All data presented is simulated. Actual data may vary, slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

