

## Ka Band Cassegrain Antenna, 26 to 33 GHz, 42 dBi, 24" Dish

### Description:

**Model SAY-2633334210-28-S1-WR** is a Cassegrain antenna that offers a nominal gain of 42 dBi and a half power beamwidth of 1 degrees typically across the frequency range of 26 to 33 GHz. The main reflector is fabricated with fiber glass to offer a light weight and rugged mechanical structure. The corrugated horn is used to provide the best feed efficiency and the most uniform illumination. The input port is a WR-28 waveguide with UG-599/U flange. The antenna supports linear polarized waveforms. Antenna feed is covered by radome that makes it suitable for outdoor applications.



### Features:

- Rugged Configuration and Low Profile
- Weather Resistant
- Low Loss and High Gain
- High Return Loss

### Applications:

- Communication Systems
- Radar Systems
- EW Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26 GHz		33 GHz
Gain		43 dBi	
3 dB Beamwidth		1°	
Sidelobe Levels		-16 dB	
Return Loss		15 dB	
Polarization		Linear	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

\*The antenna will cover a broader frequency range with some performance degradations


### Mechanical Specifications:

Item	Specification
RF Connector	WR-28 Waveguide with UG-599/U Flange
RF Connector Material	Brass
RF Connector Finish	Gold Plated
Reflector Material	Fiber Glass
Reflector Finish	Polyamide Epoxy Paint
Reflector Diameter	24"
Outline	AY-RA43-24-WR



## Ka Band Cassegrain Antenna, 26 to 33 GHz, 42 dBi, 24" Dish

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

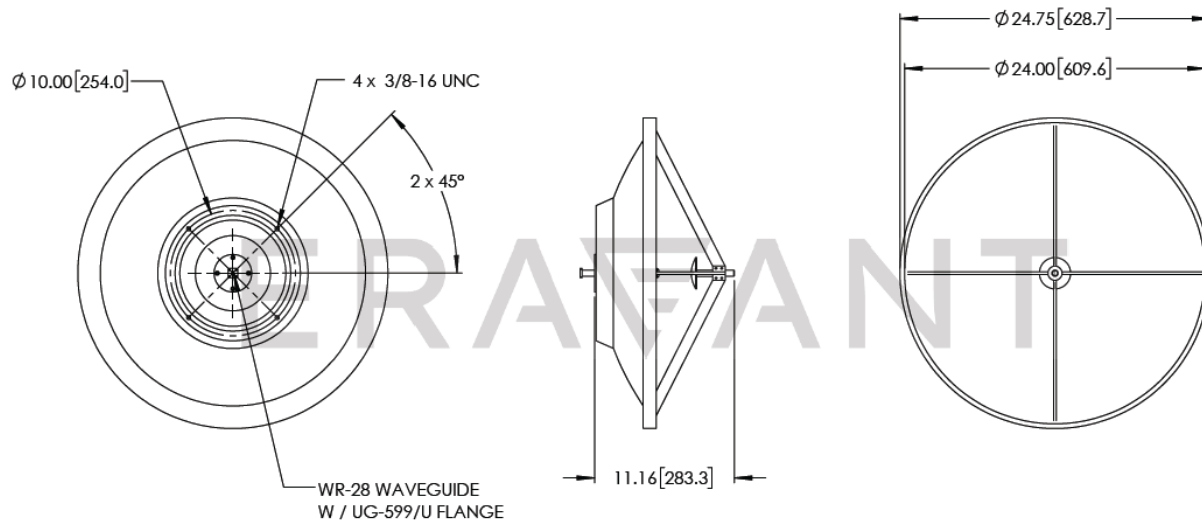

### Note:

- All data presented is simulated. Actual data may vary.
- The aiming scope is provided to assist the antenna's directional alignment.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Any mechanical impact will damage the antenna.
- Any foreign objects in the waveguide will degrade the performance of the antenna or damage the antenna.

