

# SAY-7138634212-10-S1

## W-Band Cassegrain Antenna, 71 to 86 GHz, 9" Dish, 42 dBi Gain

**SAY-7138634212-10-S1** is a W-band Cassegrain antenna that offers a nominal gain of 42 dBi and a typical half power beamwidth of 1.3 degrees from 71 to 86 GHz. The aluminum reflector offers a light-weight and rugged mechanical structure. The antenna body is treated with a chem film conversion coating for corrosion resistance. A corrugated scalar feed horn is used to provide optimal feed efficiency, low side lobes, high cross-pol rejection, and uniform illumination. The antenna port is a WR-10 waveguide with UG-387/U-M anti-cocking flange that supports only linear polarized waveforms. Other port configurations, such as a Ø0.110" circular or WR-12 waveguide port, are available under different model numbers.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	71 GHz		86 GHz
Gain		42 dBi	
3 dB Beamwidth		1.3°	
Sidelobes		-18 dB	
Return Loss		15 dB	
Specification Temperature		+25°	
Operating Temperature	-40°		+85°

### Mechanical Specifications:

Item	Specification
Antenna Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Reflector Diameter	9"
Reflector Material	Aluminum
Finish	Chem Film
Weight	2.3 lbs
Outline	AY-RW40-09-A

### ECCN

EAR99

### FEATURES

- Linear Polarization
- Low Side Lobe Levels
- High Cross-Polarization Rejection

### APPLICATIONS


- Radar and Communication Systems
- EW Systems

### SUPPLEMENTAL DETAILS

## SAY-7138634212-10-S1

### Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

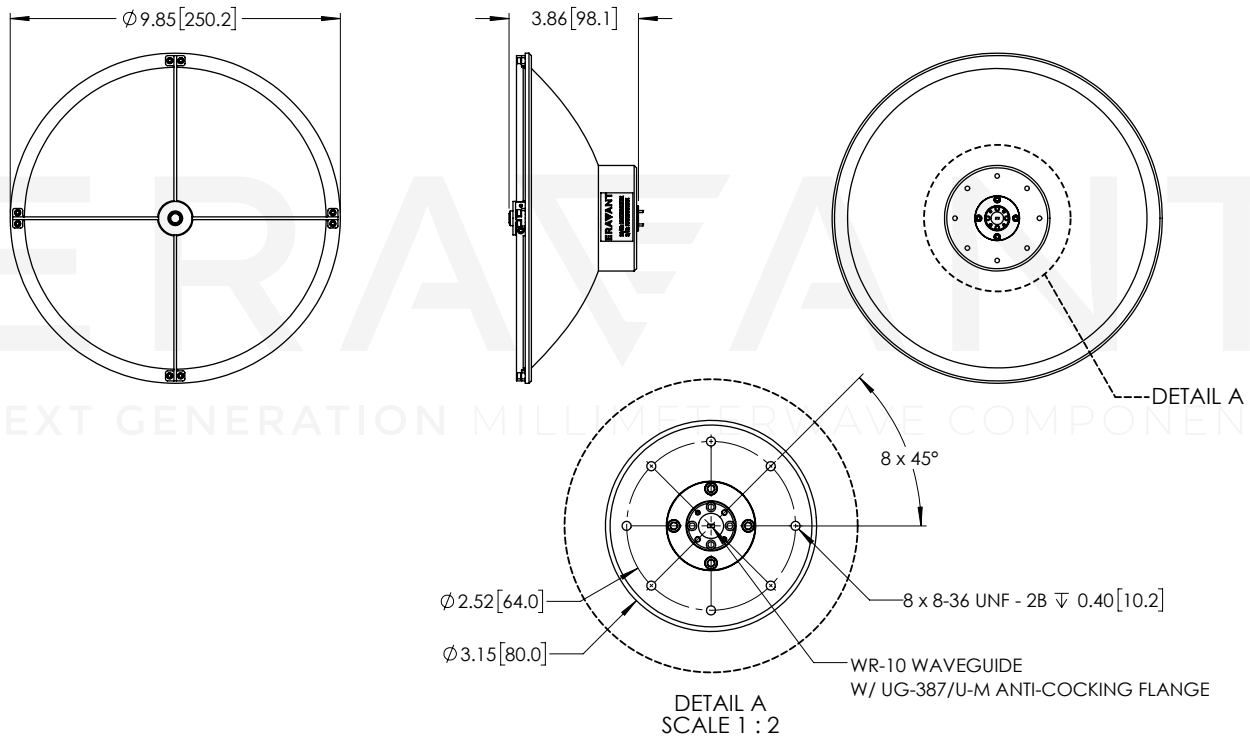

### NOTE:


- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:


- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied:  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

## SAY-7138634212-10-S1

### Simulated Antenna Patterns @ 71 GHz

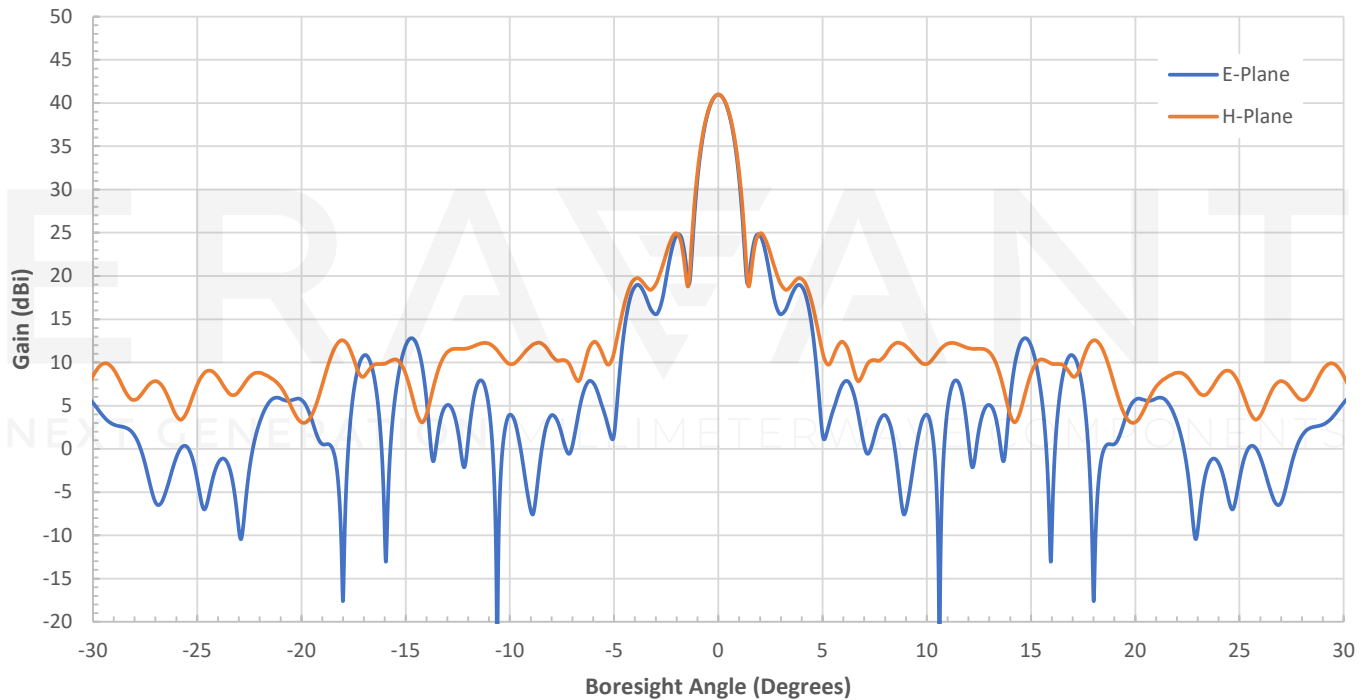


### Simulated Antenna Patterns @ 78.5 GHz

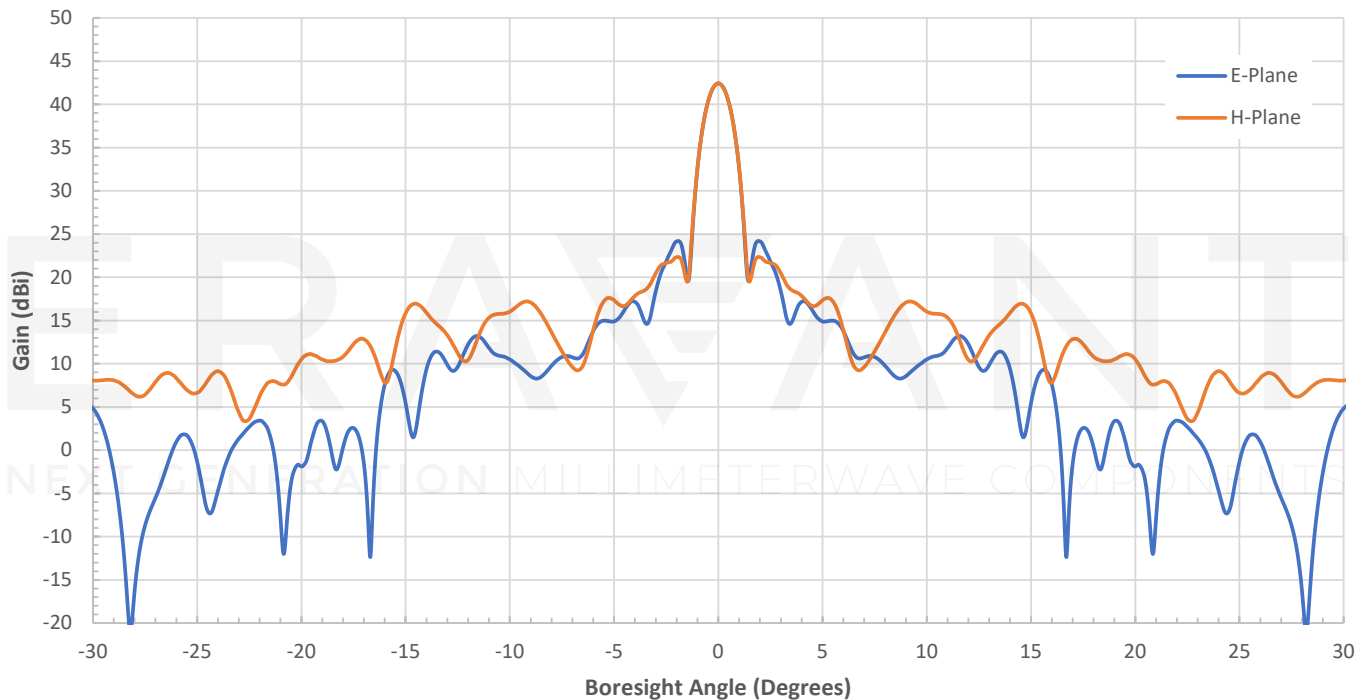

## SAY-7138634212-10-S1

### Simulated Antenna Patterns @ 86 GHz

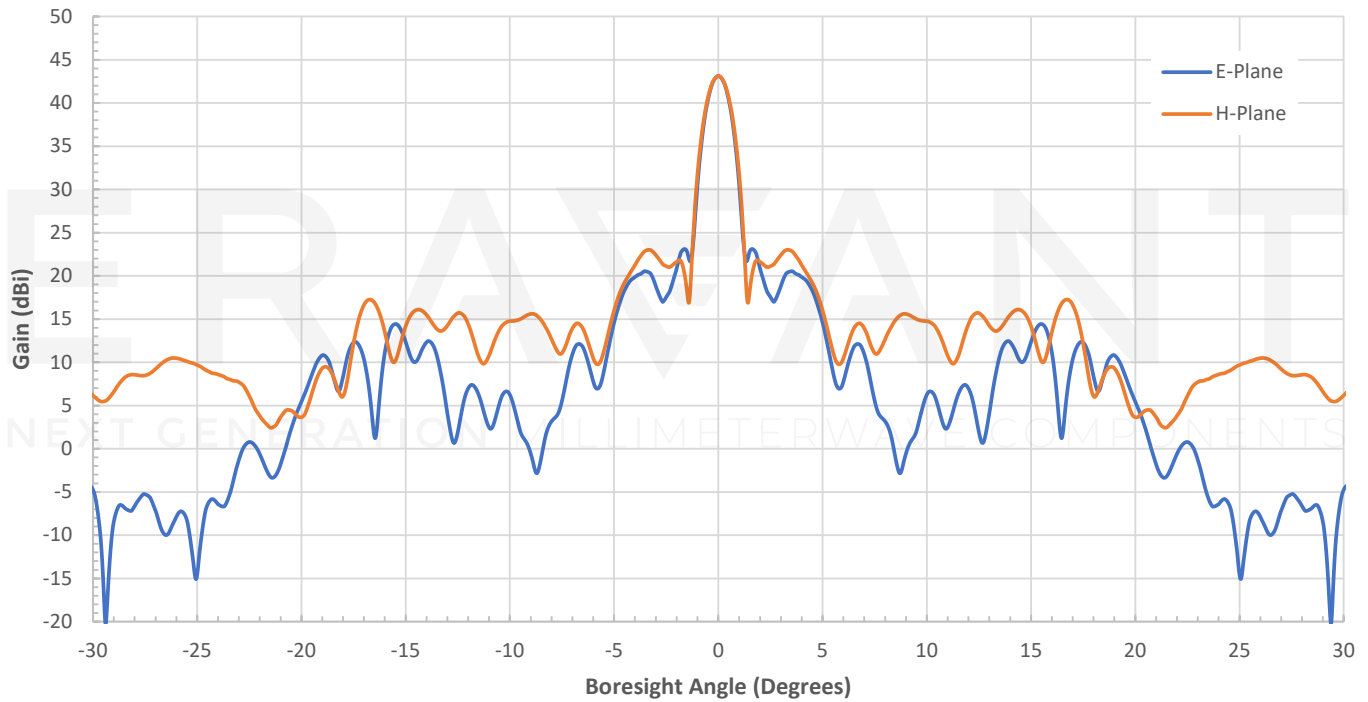

### Typical Return Loss vs Frequency

