

SAY-7138634212-110-S1

W-Band Cassegrain Antenna, 71 to 86 GHz, 9" Dish, 42 dBi Gain

SAY-7138634212-110-S1 is a W-band Cassegrain antenna that offers a nominal gain of 42 dBi and a typical half power beamwidth of 1.3 degrees from 71 to 86 GHz. The aluminum reflector offers a light-weight and rugged mechanical structure. The antenna body is treated with a chem film conversion coating for corrosion resistance. A corrugated scalar feed horn is used to provide optimal feed efficiency, low side lobes, high cross-pol rejection, and uniform illumination. The antenna port is a Ø 0.110" circular waveguide with UG-387/U-M anti-cocking flange that can support both linear and circular polarized waveforms. Other port configurations, such as a WR-10 or WR-12 waveguide port, are available under different model numbers.



Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|---------|---------|
| Frequency | 71 GHz | | 86 GHz |
| Gain | | 42 dBi | |
| 3 dB Beamwidth | | 1.3° | |
| Sidelobes | | -18 dB | |
| Return Loss | | 15 dB | |
| Specification Temperature | | +25° | |
| Operating Temperature | -40° | | +85° |

Mechanical Specifications:

| Item | Specification |
|--------------------|---|
| Antenna Port | Ø 0.110" Circular Waveguide with UG-387/U-M Anti-Cocking Flange |
| Reflector Diameter | 9" |
| Reflector Material | Aluminum |
| Finish | Chem Film |
| Weight | 2.3 lbs |
| Outline | AY-CW40-09-A-FRF |

ECCN

EAR99

FEATURES

- Linear and Circular Polarization
- Low Side Lobe Levels
- High Cross-Polarization Rejection

APPLICATIONS


- Radar and Communication Systems
- EW Systems

SUPPLEMENTAL DETAILS

SAY-7138634212-110-S1

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

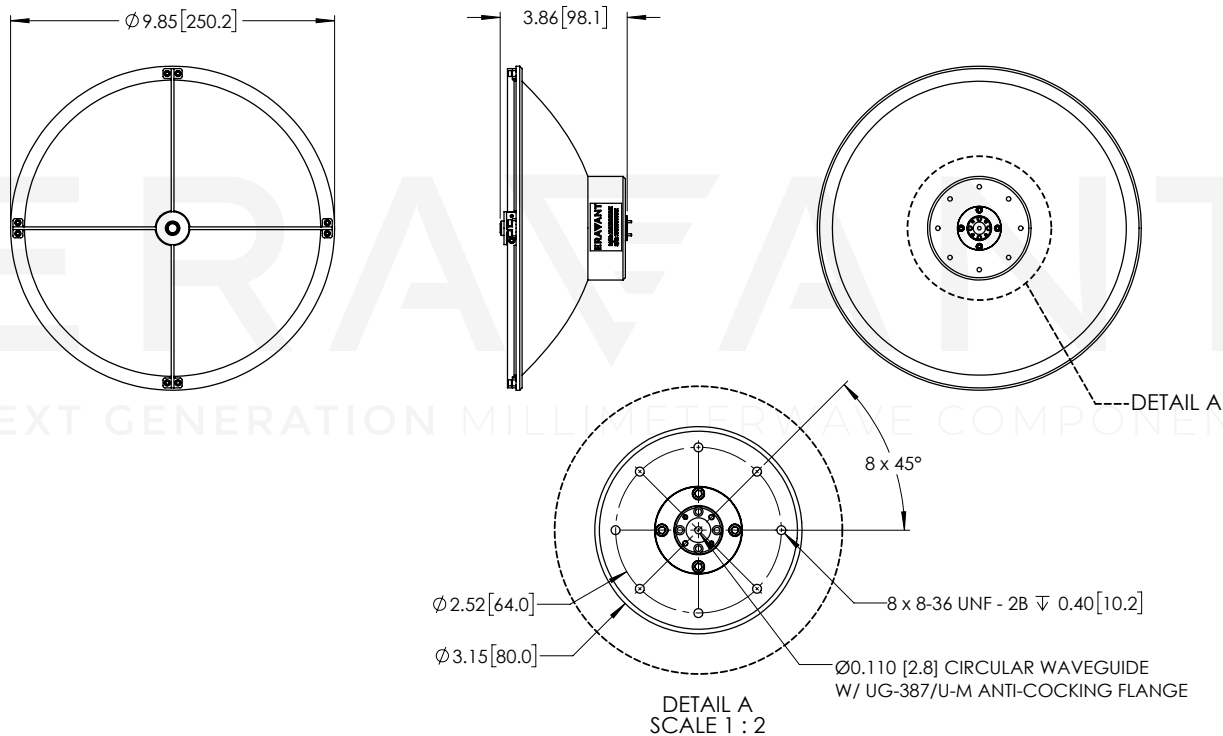

NOTE:


- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:


- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

SAY-7138634212-110-S1

Simulated Antenna Patterns @ 71 GHz

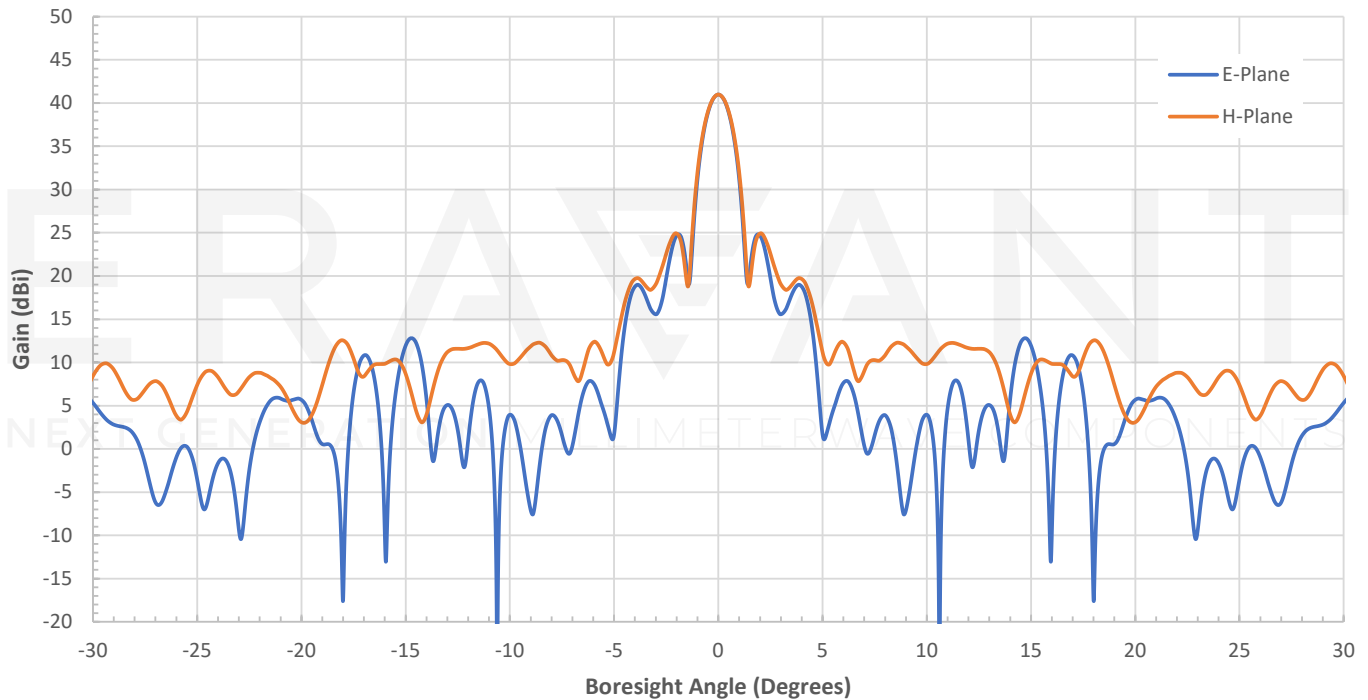


Simulated Antenna Patterns @ 78.5 GHz

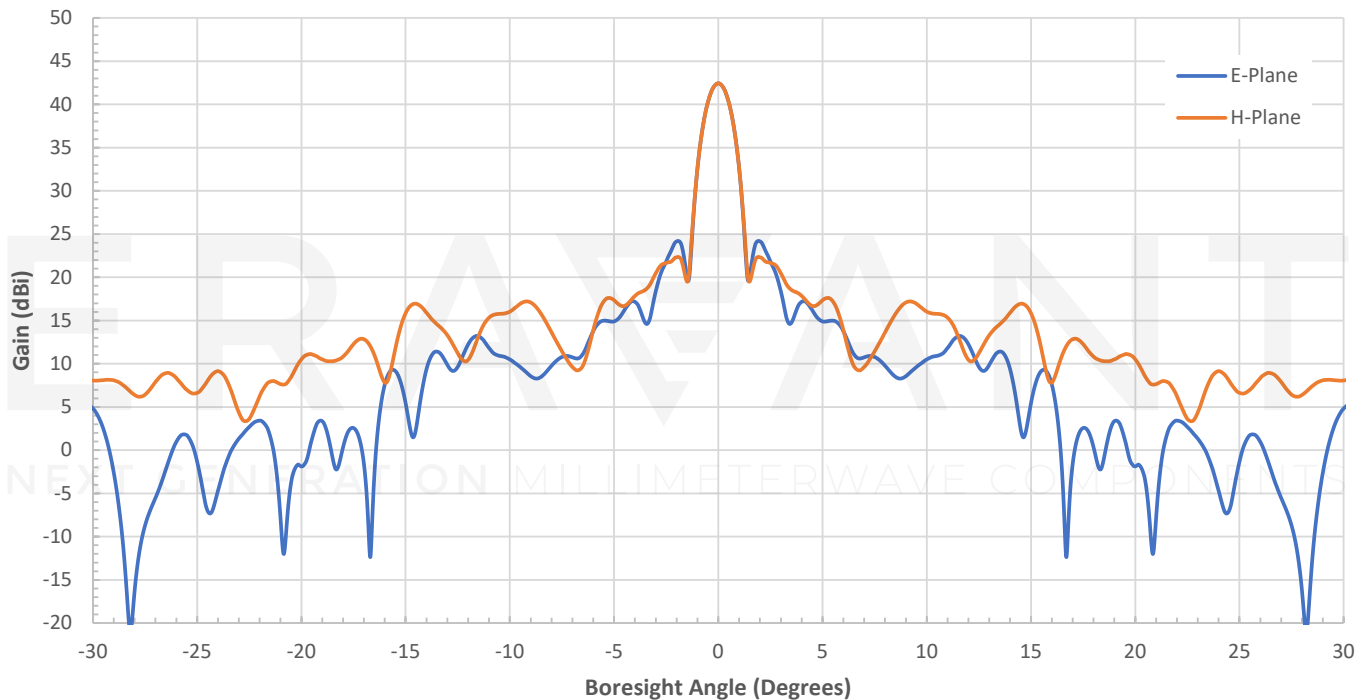

SAY-7138634212-110-S1

Simulated Antenna Patterns @ 86 GHz

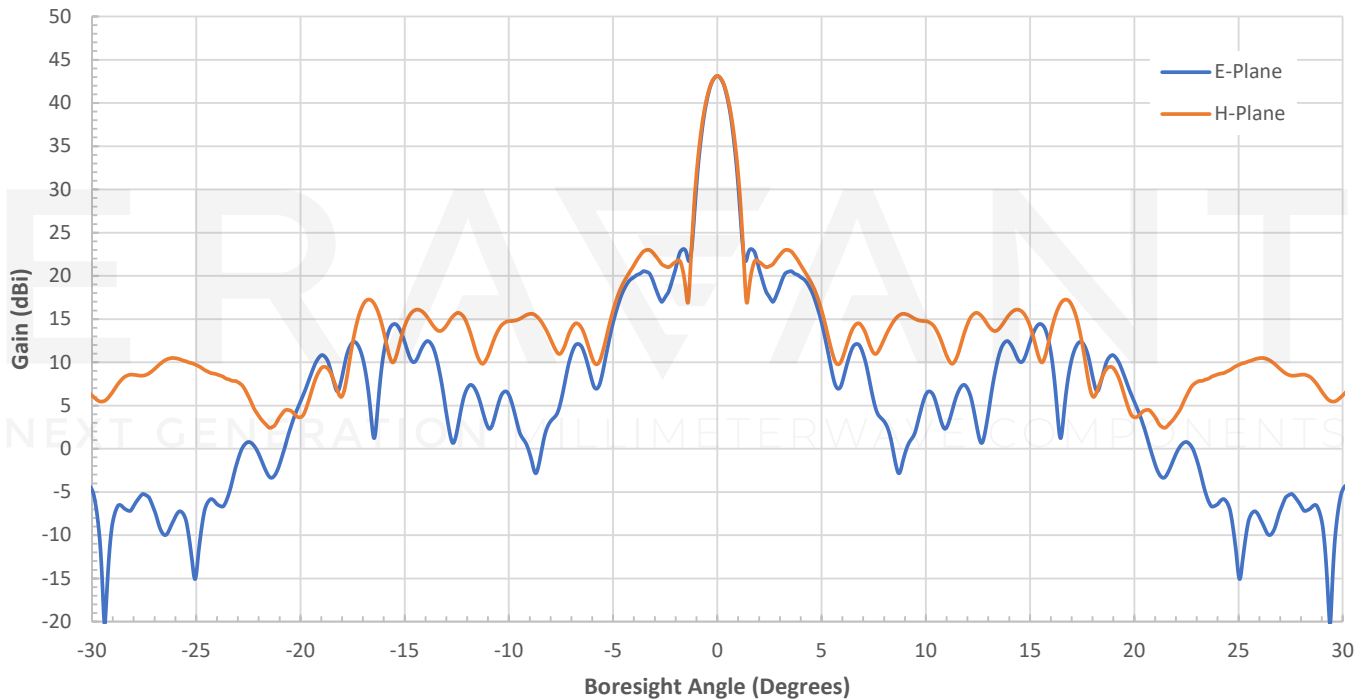

Typical Return Loss vs Frequency

