

SAY-7138634511-12-S1

E-Band Cassegrain Antenna, 71 to 86 GHz, 12", 45 dBi Gain

SAY-7138634511-12-S1 is a E-band Cassegrain antenna that offers a nominal gain of 45 dBi and a typical half power beamwidth of 1.1 degrees from 71 to 86 GHz. The aluminum reflector offers a lightweight and rugged mechanical structure and is treated with a chem film conversion coating for corrosion resistance. A corrugated scalar feed horn is used to provide optimal feed efficiency, low side lobes, high cross-pol rejection, and uniform illumination. The antenna port is a WR-12 waveguide with UG-387/U anti-cocking flange and can support linear polarized waveforms. Other port configurations, such as circular waveguide port, are available under different model numbers.



Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|---------|---------|
| Frequency | 71 GHz | | 86 GHz |
| Gain | | 45 dBi | |
| 3 dB Beamwidth | | 1.1° | |
| Sidelobes | | -17 dB | |
| Return Loss | | 15 dB | |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |

Mechanical Specifications:

| Item | Specification |
|--------------------|---|
| Antenna Port | WR-12 Waveguide with UG 387/U Anti-Cocking Flange |
| Reflector Diameter | 12" |
| Reflector Material | Aluminum |
| Finish | Chem Film |
| Outline | AY-RE45-12-A |

ECCN

EAR99

FEATURES

- Linear Polarization
- Low Side Lobe Levels
- High Cross-Polarization


APPLICATIONS

- Radar Communication System
- EW Systems

SUPPLEMENTAL DETAILS

SAY-7138634511-12-S1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

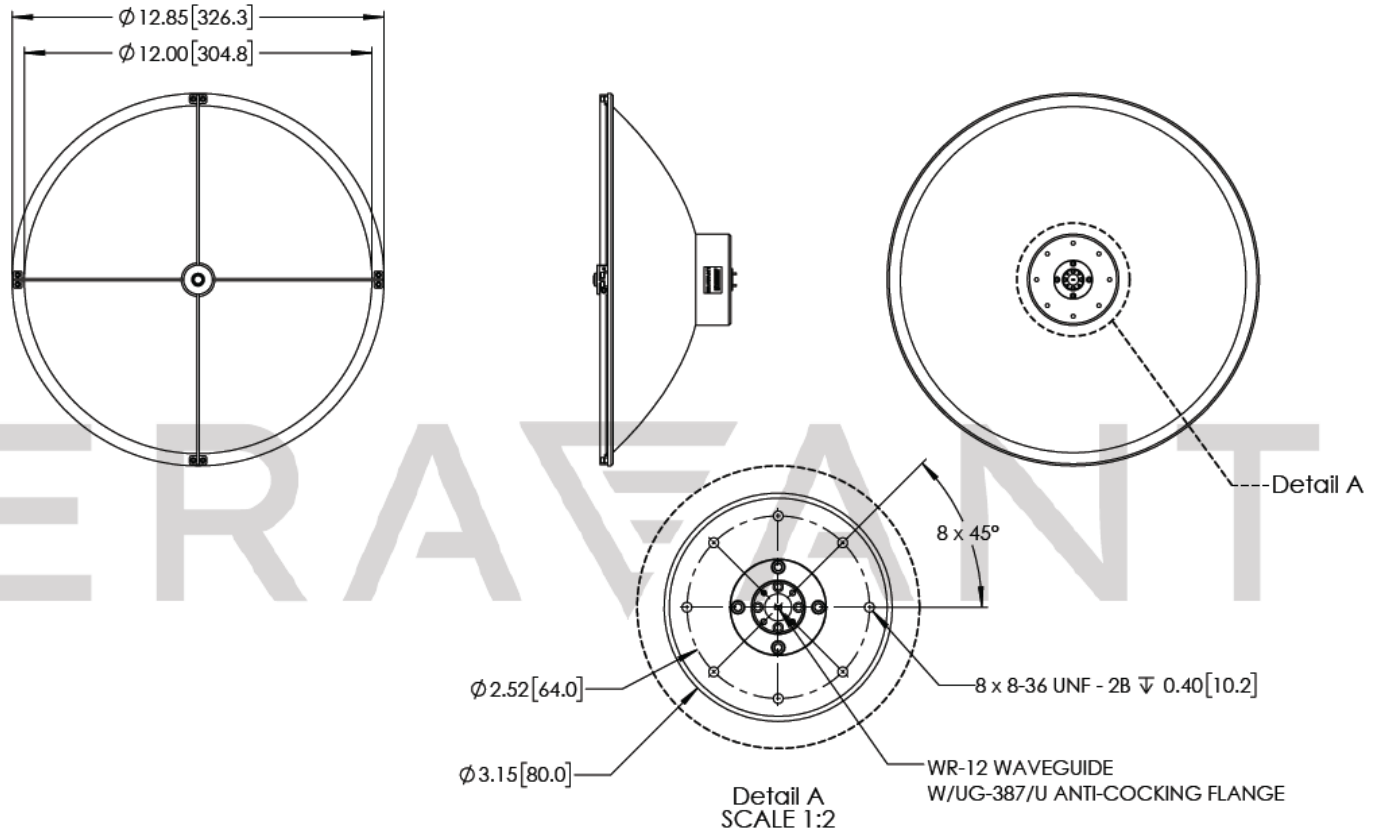

NOTE:

- Test data provided is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- For the simulated test data provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE