

SAM-6636830395-15-L1-4W

V Band Microstrip Patch Array Antenna, 67 Ghz, 4 dBi, 50° x 95°

SAM-6636830395-15-L1-4W is a linear polarized, 67 GHz microstrip patch 1 x 4 array antenna. The antenna array implements four individual antenna ports so that beamforming can be achieved via various input signal definitions. The individual patch antenna has a typical gain of 4 dBi, a vertical beamwidth of 50 degrees and horizontal beamwidth of 95 degrees, respectively. When all ports are fed with in phase and equal amplitude signals, the combined gain and beamwidth of the array are 12 dBi and 40 degrees, typically. The antenna is constructed with a high performing, low loss soft microwave substrate to achieve the best performance in the class. The RF interface is four WR-15 waveguides with UG-385/U compatible flanges.



Electrical Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range	66 GHz		68 GHz
Gain (Individual Patch)		4.0 dBi	
3 dB Beamwidth (Individual Patch)	50° (Vertical, E Plane) x 95° (Horizontal, H Plane)		
Sidelobe Level (Individual Patch)		-12 dB	
Array Gain (Fed in Phase)		12.0 dBi	
Array 3 dB Beamwidth (Fed in Phase)	40° (Vertical, E Plane) x 50° (Horizontal, H Plane)		
Array Sidelobe Level (Fed in Phase)		-12 dB	
Polarization		Linear	
Return Loss		6 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	4 x WR-15 Waveguide with UG-385/U Compatible Flange
Number of Elements	1 (H) x 4 (V)
Baseplate Material	Aluminum
Patch Finish	Gold Plated
Weight	2.0 Oz
Size	1.60" (L) x 1.60" (W) x 0.49" (H)
Outline	AM-RV-9550-4W

ECCN

EAR99

FEATURES

- Compact Size
- Beamforming Feasibility
- Low Cost in Volume

APPLICATIONS

- 5G Systems
- Beamforming
- Communication Systems
- Probe Stations


SUPPLEMENTAL DETAILS




SAM-6636830395-15-L1-4W

V Band Microstrip Patch Array Antenna, 67 Ghz, 4 dBi, 50° x 95°

Measured Individual Patch Pattern @ 65.96 GHz

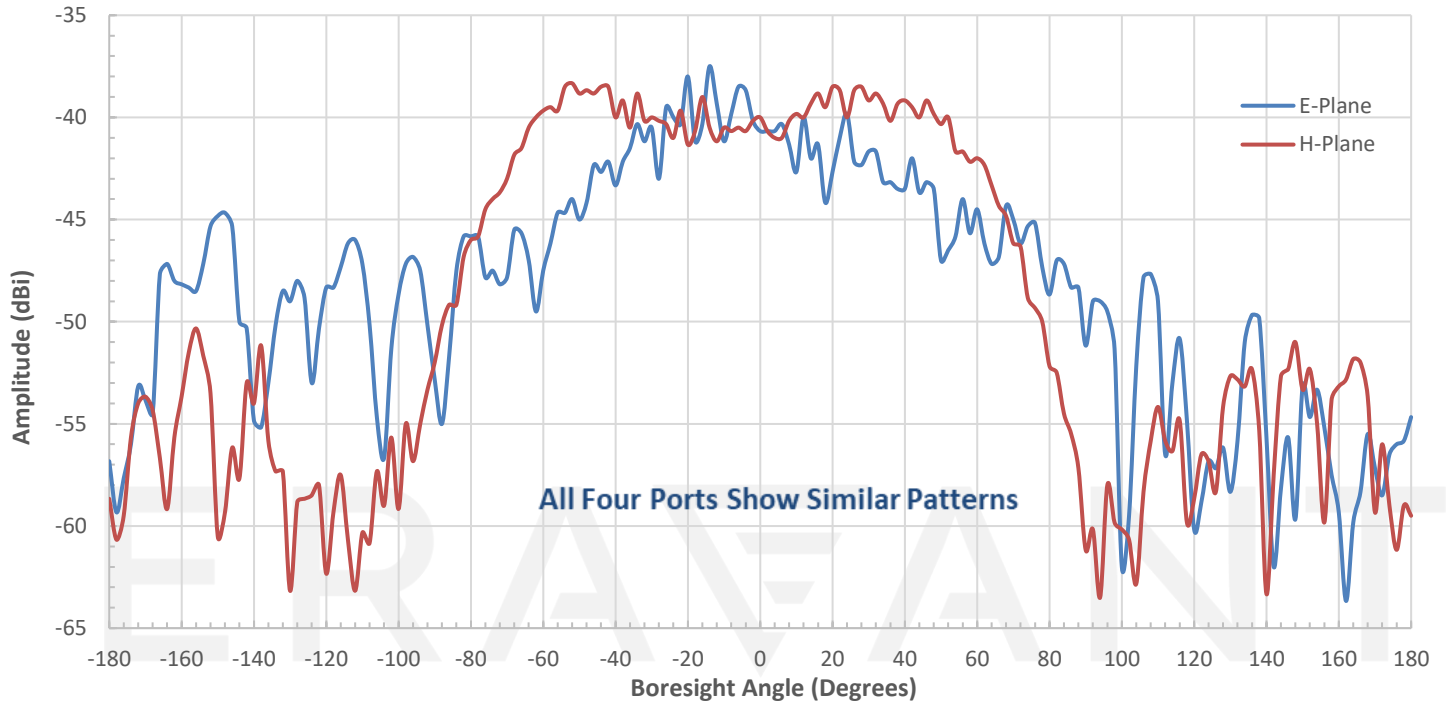


Measured Individual Patch Pattern @ 66.96 GHz

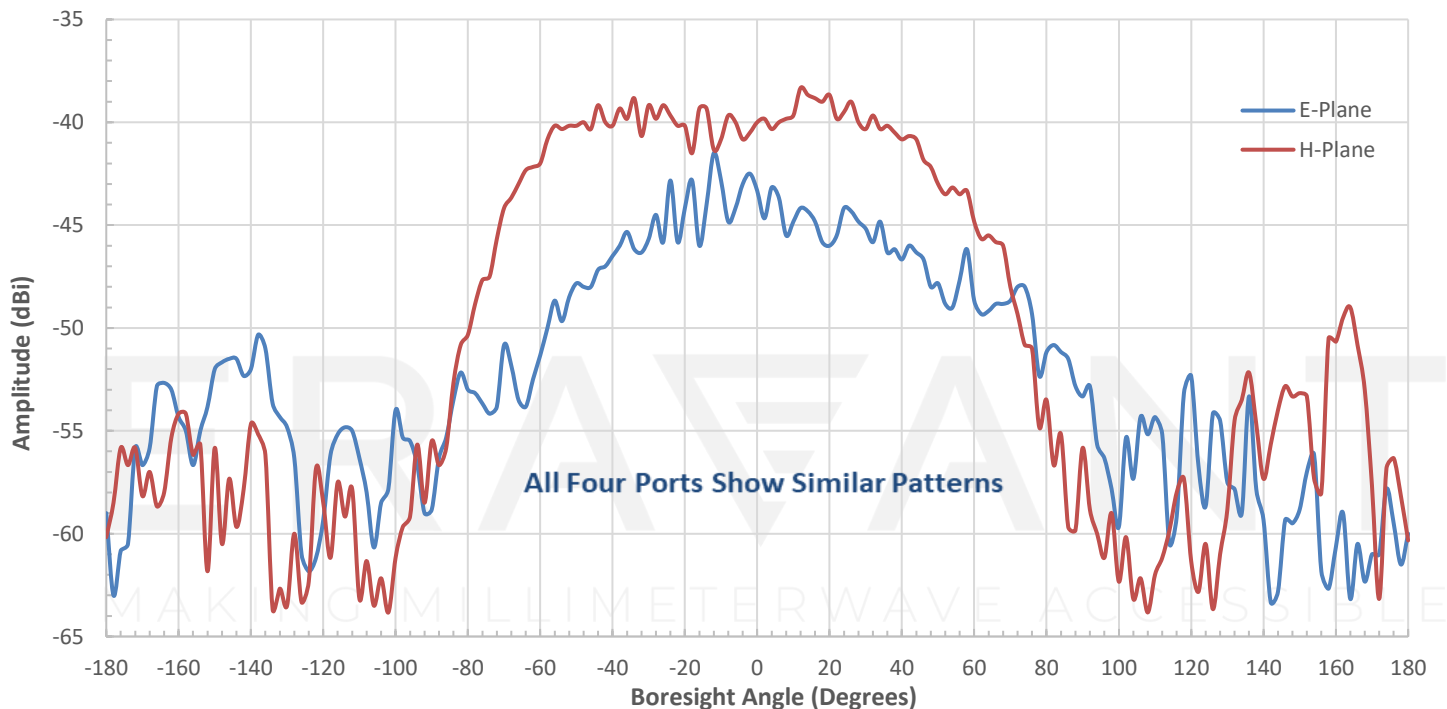


SAM-6636830395-15-L1-4W

V Band Microstrip Patch Array Antenna, 67 Ghz, 4 dBi, 50° x 95°

Measured Individual Patch Pattern @ 67.96 GHz

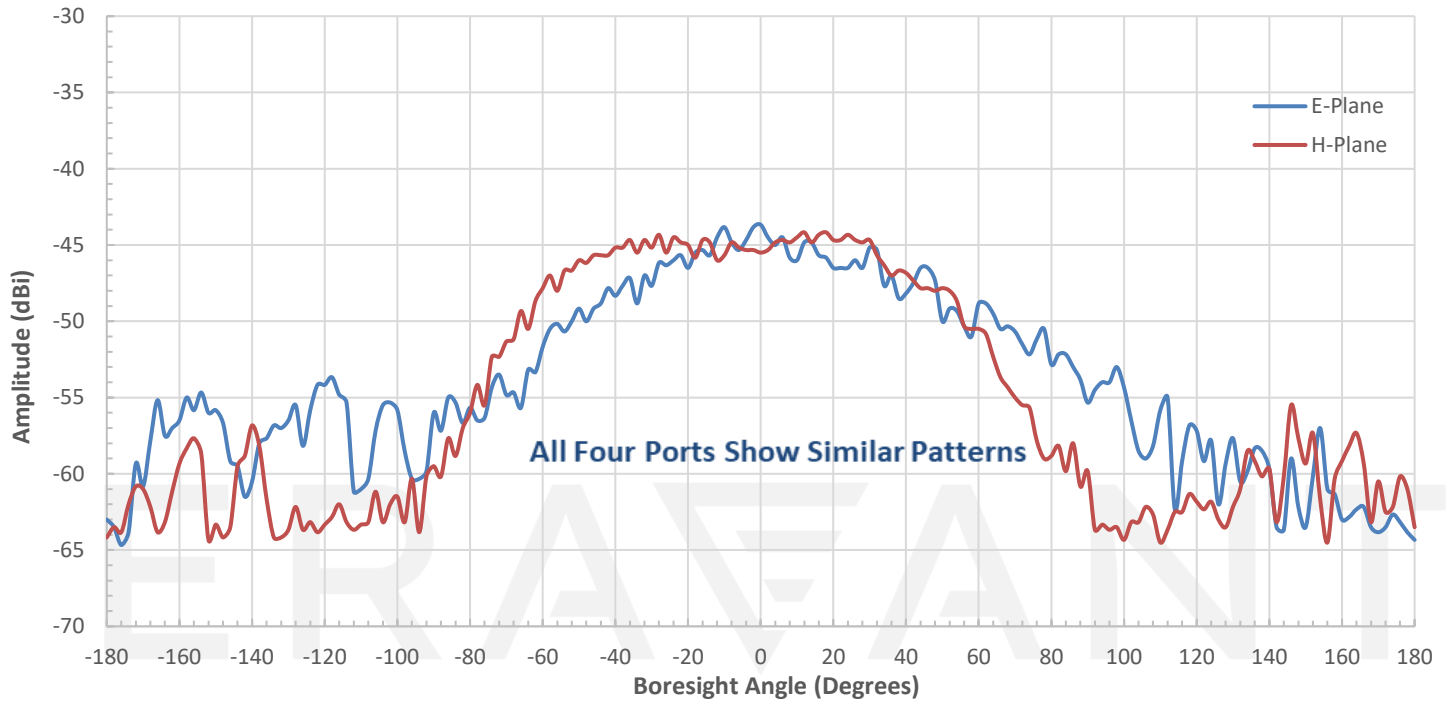


Measured Individual Patch Gain vs. Frequency

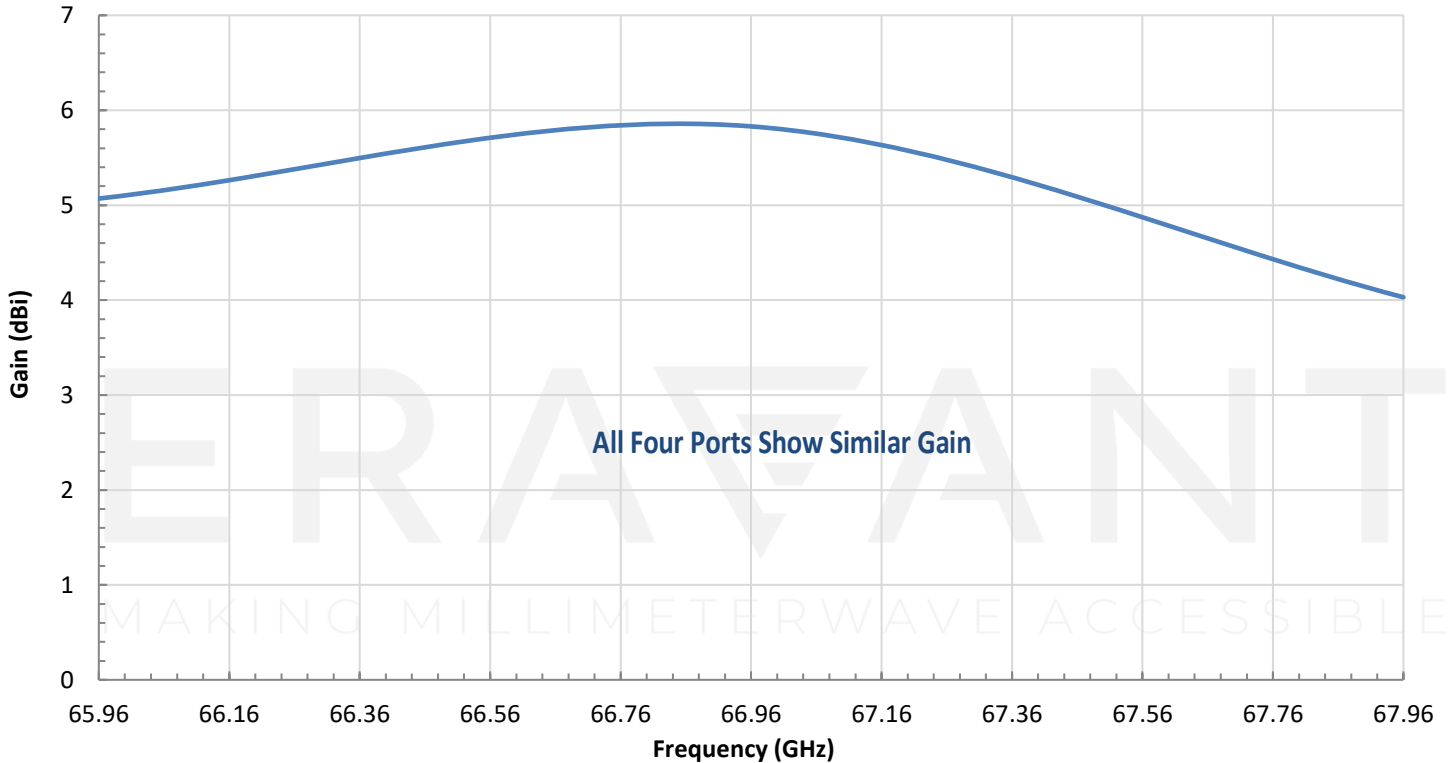


SAM-6636830395-15-L1-4W

V Band Microstrip Patch Array Antenna, 67 Ghz, 4 dBi, 50° x 95°

Measured Individual Patch Return Loss vs. Frequency

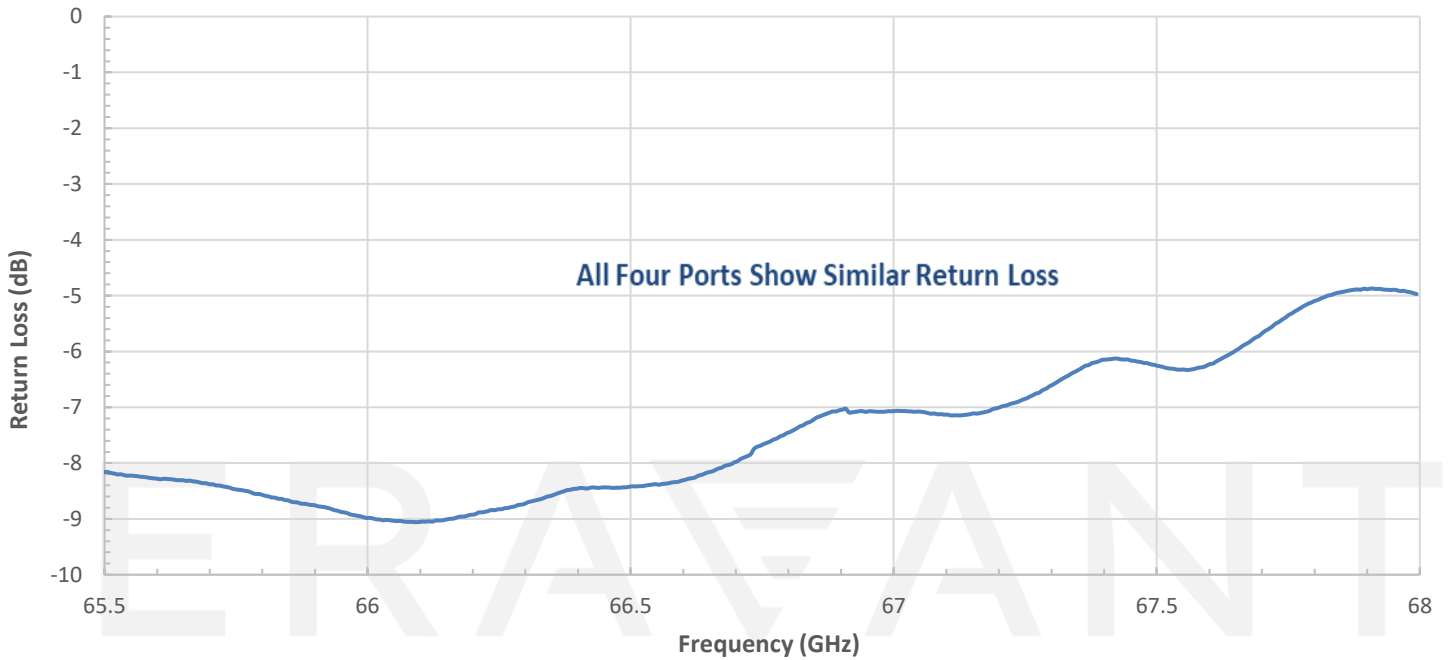


In-Phase Fed Simulated H-Plane Patch Array Antenna Pattern @ 63 GHz

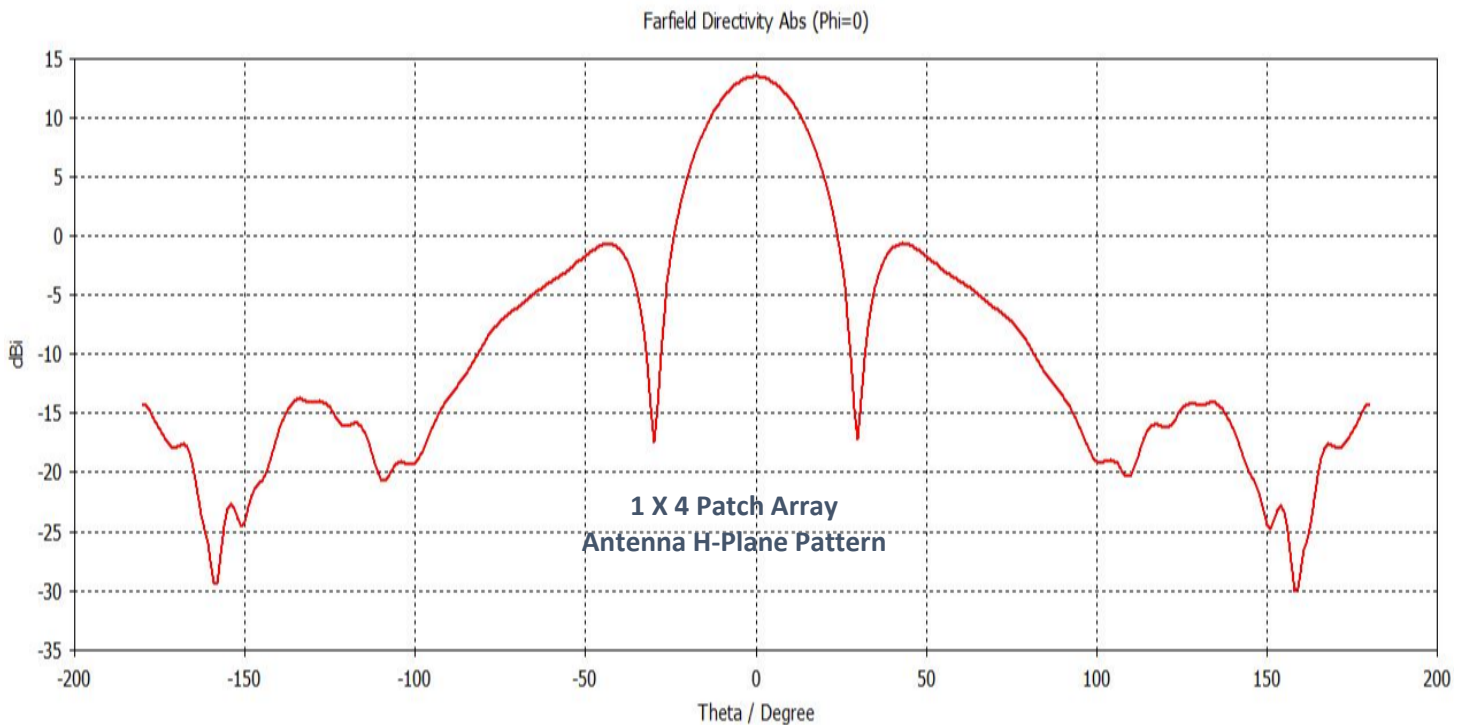


SAM-6636830395-15-L1-4W

V Band Microstrip Patch Array Antenna, 67 Ghz, 4 dBi, 50° x 95°

In-Phase Fed Simulated E-Plane Patch Array Antenna Pattern @ 63 GHz

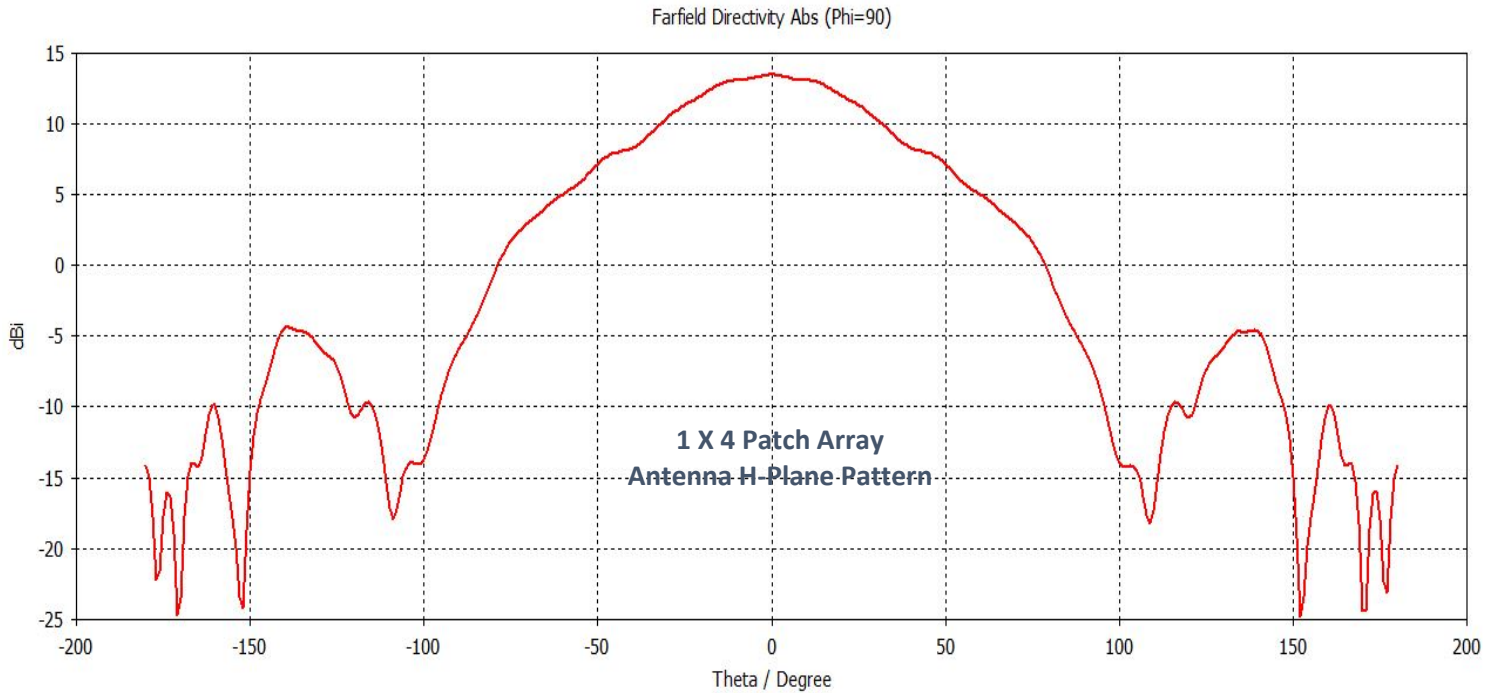

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

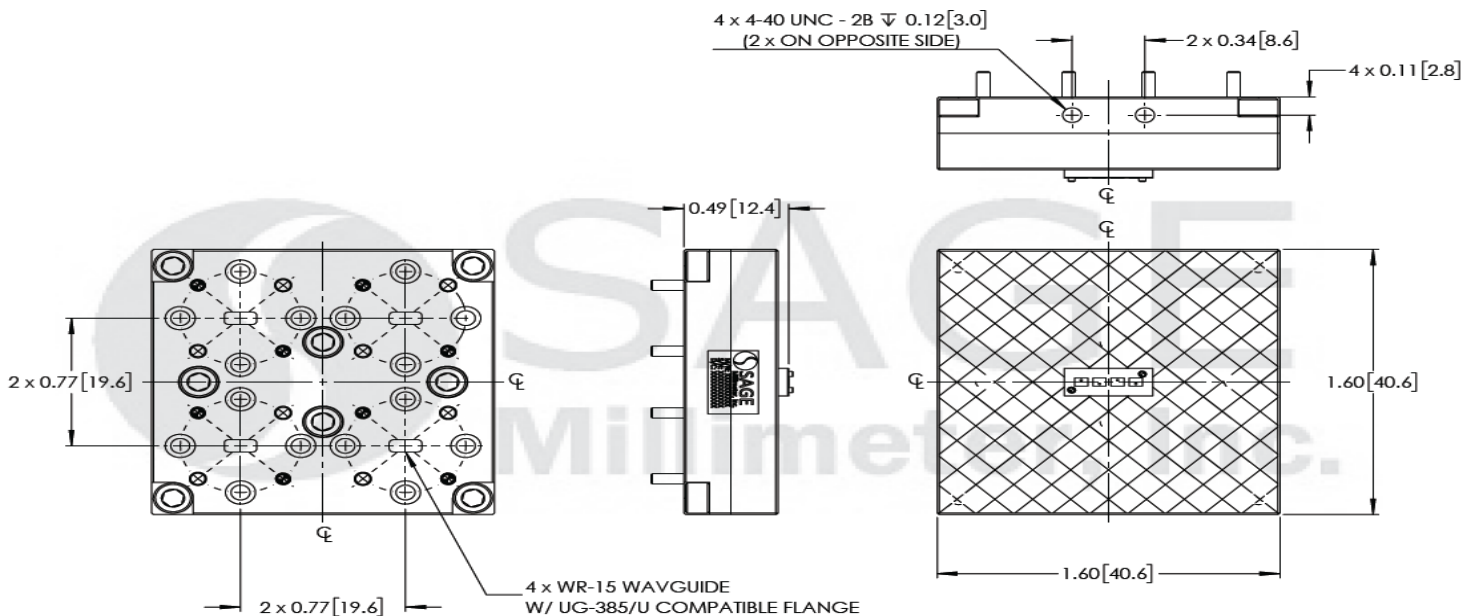

NOTES:

HATCHED AREA IS ECCOSORB



NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE