



## Coaxial Directional Coupler, 6 to 18 GHz, 20 dB Coupling Level

### Description:

**SCD-0631832012-SF-SA** is a 20 dB coaxial directional coupler that covers the frequency range of 6 to 18 GHz. The nominal insertion loss of the coupler is 1.0 dB and the coupling ripple is  $\pm 1.0$  dB. The directivity of the coupler is 12 dB. The RF connectors of the coupler are SMA female connectors. The power handling of the coupler is 30 watts maximum. Other configurations, such as different connectors for input and output, are available under different model numbers.



### Features:

- Low Insertion Loss
- Flat Coupling Level

### Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	6 GHz		18 GHz
Insertion Loss		1.0 dB	
Coupling		20 dB	
Coupling Flatness		$\pm 1.0$ dB	
Directivity		12 dB	
Port Return Loss		14 dB	
Impedance		50 $\Omega$	
Power Handling			30 W (CW)
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-40 $^{\circ}$ C		+80 $^{\circ}$ C

### Mechanical Specifications:


Item	Specification
RF Ports	SMA Female
Case Material	Aluminum
Finishing	Black Painted
Weight	0.9 Oz
Outline	CD-SS-SR4






## Coaxial Directional Coupler, 6 to 18 GHz, 20 dB Coupling Level

### Typical Coupling and Directivity vs. Frequency

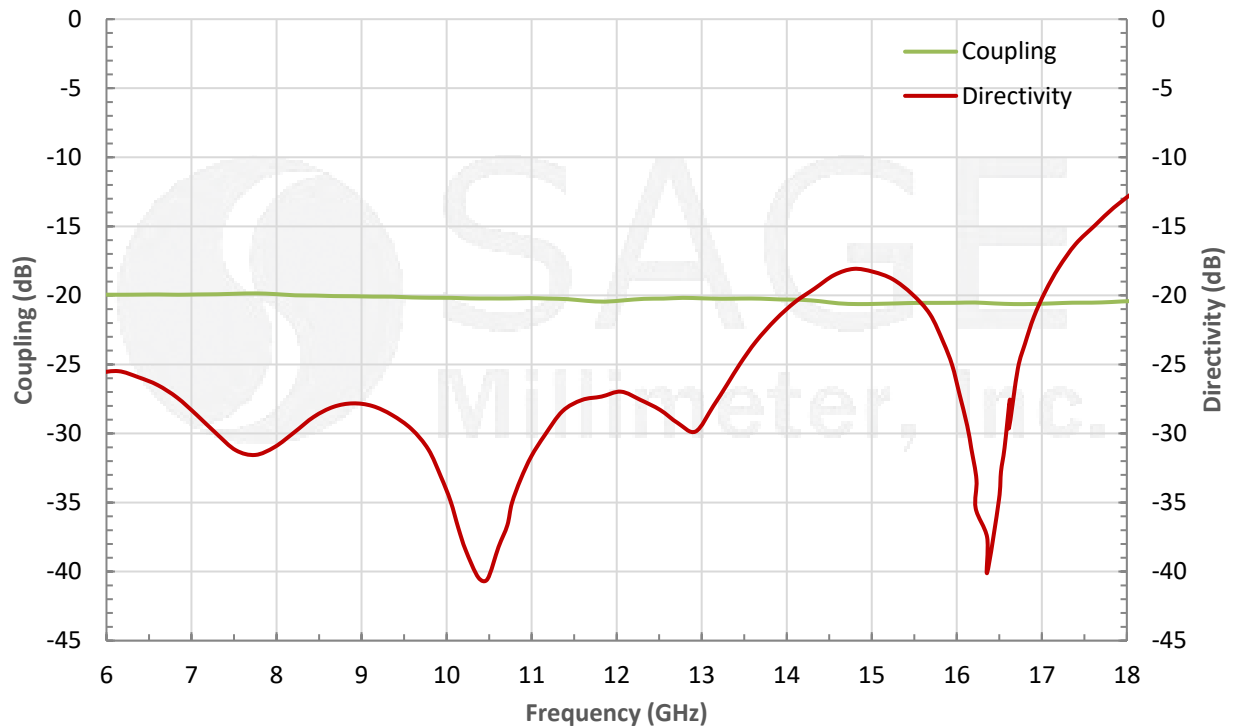


### Typical Performance vs. Frequency

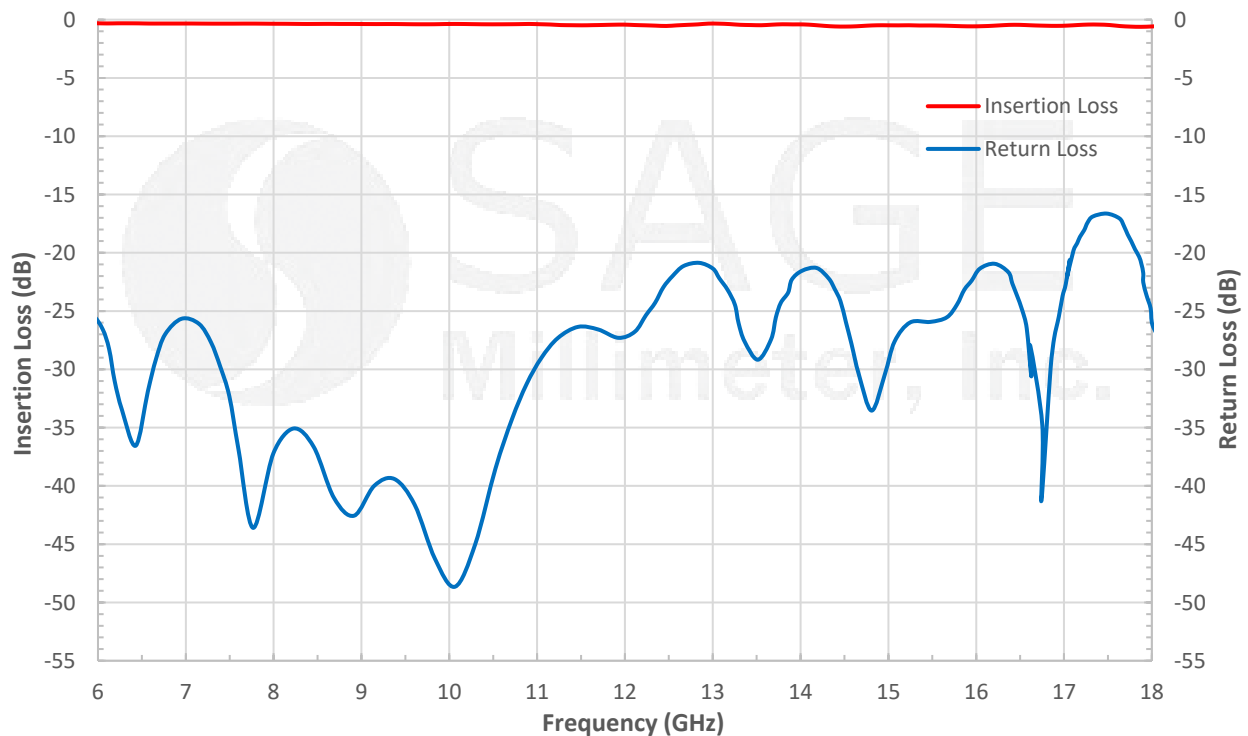



## Coaxial Directional Coupler, 6 to 18 GHz, 20 dB Coupling Level

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

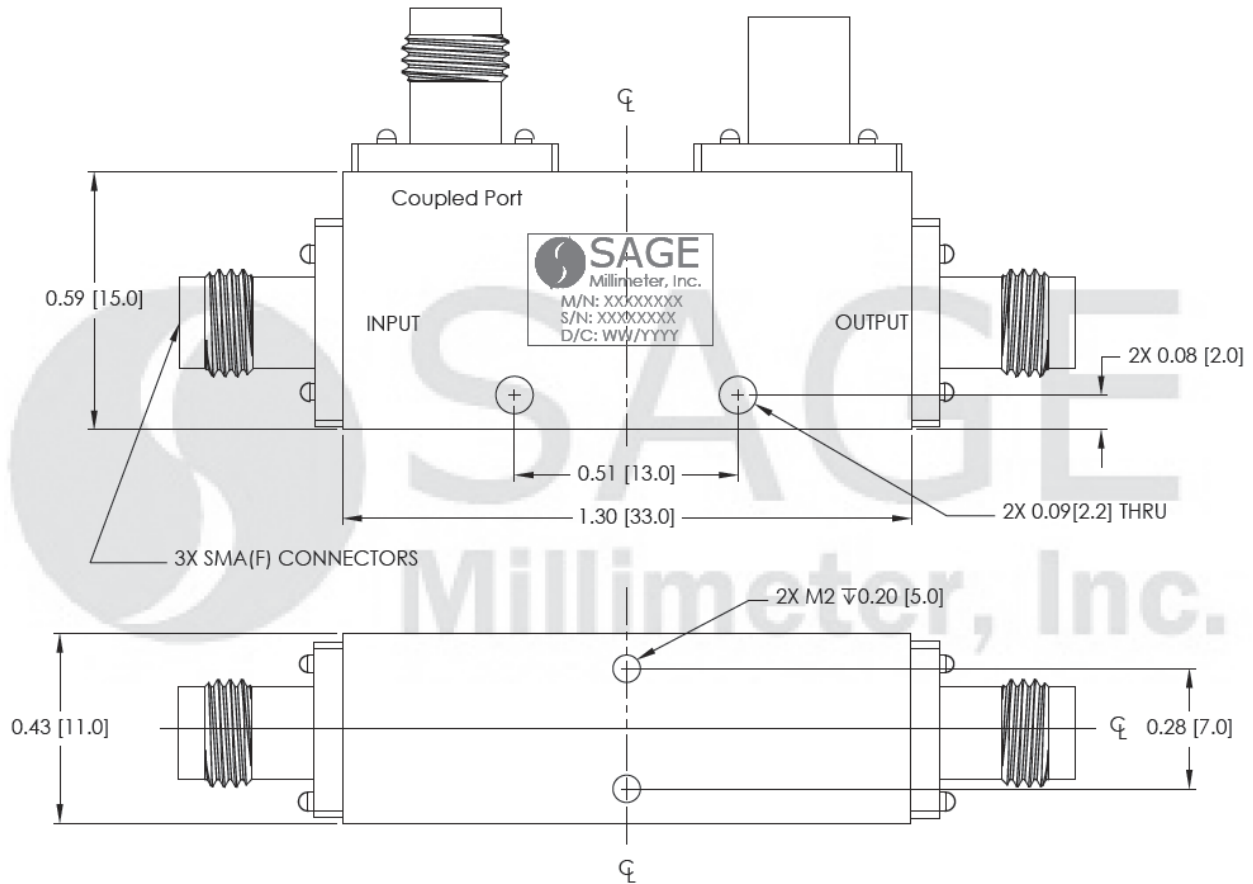

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

**Caution:**

- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm) shall be used. **Eravant torque wrench with model number [SCH-08008-S1](#) is highly recommended.**

