



## WR-28 Coaxial Highpass Filter, 22 to 40 GHz Passband, 40 dB Rejection

### Description:

Model **SCF-22318340-28KFKF-H1** is a coaxial highpass filter with a passband frequency from 22 to 40 GHz. The filter rejects frequencies from DC to 18 GHz and provides a nominal insertion loss of 1.0 dB in its passband with low ripple. Typical rejection for this model is 40 dB. The RF ports offer female 2.92 mm connectors. However, the models with other connector type, such as male connector, are also available under different model numbers.



### Features:

- Low Cost
- Low Insertion Loss
- High Rejection

### Applications:

- Communication Systems
- Radar Systems
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency	22 GHz		40 GHz
Passband Insertion Loss		1.0 dB	
Rejection Frequency	DC		18 GHz
Rejection		40 dB	
Passband Return Loss		13 dB	
Impedance		50 $\Omega$	
Power Handling			50 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specifications
RF Ports	2.92 mm (F)
Material	Aluminum
Finish	Gold Plated
Weight	0.61 Oz
Size	1.72" (L) x 0.75" (S) for SCF-22318340-28KFKF-H1
Outline	CF-HA-B




## WR-28 Coaxial Highpass Filter, 22 to 40 GHz Passband, 40 dB Rejection

### Typical Insertion and Return Loss vs. Frequency

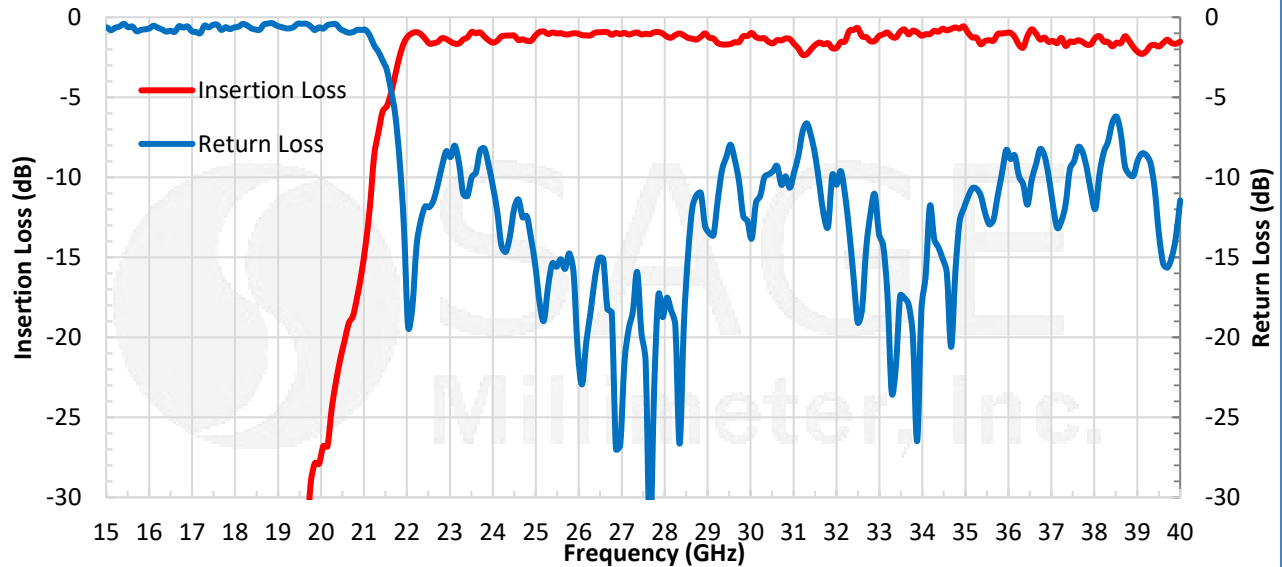

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

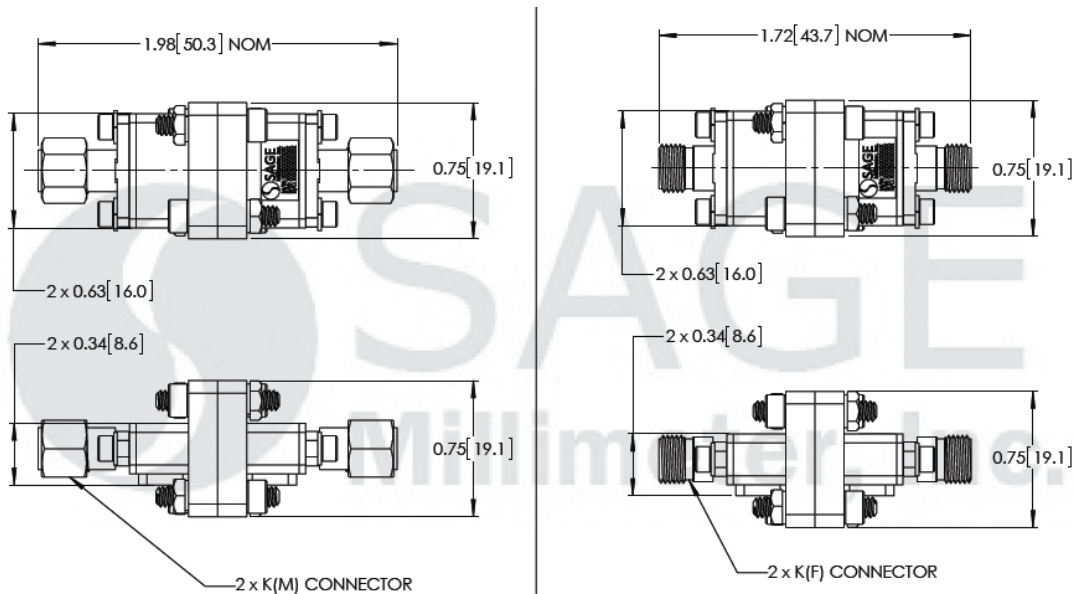

#### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be used. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com