

W-Band Spot-Focusing Lens Antenna, Focal Length 20.5"

Description:

Model SAQ-943205-10-S1 is a W-band, spot-focusing lens antenna that delivers a 10 dB spot size of 1.30" diameter at the focal length of 20.5". The antenna employs a low loss lens to offer excellent aperture efficiency in full W band frequency range of 75 to 110 GHz. The lens antenna is equipped with a standard WR-10 waveguide and UG-387/U-M flange as its input port. It supports linear polarized waveforms.



Features:

Applications:

- Rugged Mechanical Configuration
- High Efficiency and Low loss
- Full W Band Coverage

• Material Property Measurement Systems

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|------------------------------|---------|---------|---------|
| Frequency Range | 75 GHz | 94 GHz | 110 GHz |
| Focal Length | | 20.5" | |
| Spot Size @ 10 dB Below Peak | | 1.30" | |
| Polarization | Linear | | |
| Specification Temperature | | +25 °C | |
| Operating Temperature | -40 °C | | +85 °C |

Mechanical Specifications:


| Item | Specification | |
|---------------|--|--|
| Antenna Port | WR-10 Waveguide with UG-387/U-M Flange | |
| Horn Material | Aluminum | |
| Finish | Gold Plated | |
| Weight | 7.4 Oz | |
| Lens Diameter | 3.5" | |
| Dimensions | 4.39" (L) x 4.10" (Ø) | |
| Outline | AQ-RW-3.5 | |




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

W-Band Spot-Focusing Lens Antenna, Focal Length 20.5"

Typical Spot Size @10 dB Below Peak vs. Frequency

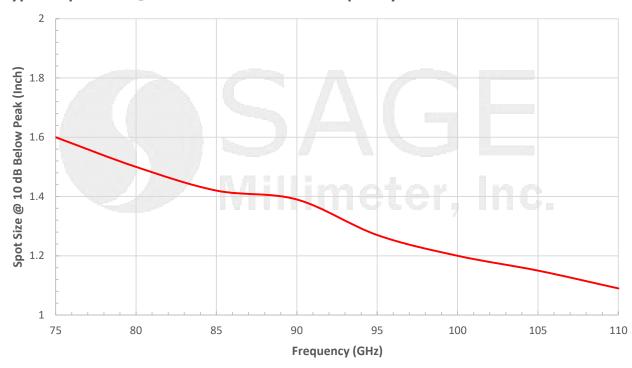

Typical Return Loss vs. Frequency

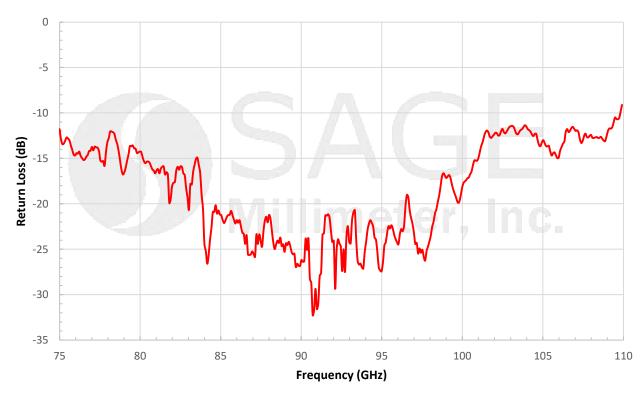




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



W-Band Spot-Focusing Lens Antenna, Focal Length 20.5"

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

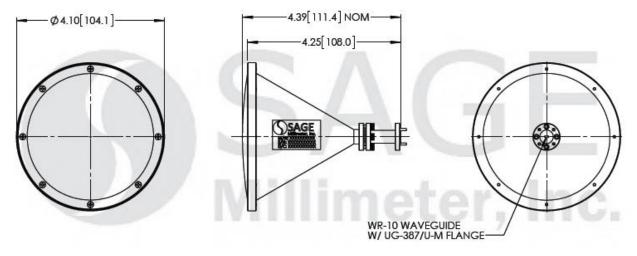

Note:

- Spot size data is simulated. Actual data may vary.
- Return loss data is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C room temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

Any foreign objects in the antenna will cause performance degradation and possible device damage.





www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com