



WR-34 Pyramidal Horn Antenna, 17 dBi Gain

Description:

Model SAR-1725-34-S2 is a pyramidal horn antenna that operates from 22 GHz to 33 GHz. The antenna offers 17 dBi typical gain and a typical half power beamwidth of 26 degrees on the E-plane and 24 degrees on the H-plane. The antenna supports linear polarized waveforms. The input of this antenna is a WR-34 waveguide with UG-1530/U flange.



Features:

- Rectangular Waveguide Interface
- Precisely Machined and Gold Plated
- Linear Polarization
- High Return Loss

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	22 GHz		33 GHz
Gain		17 dBi	
Polarization		Linear	
3 dB Beamwidth, E-Plane		26°	
3 dB Beamwidth, H-Plane		24°	
Sidelobes, E-Plane		-14 dB	
Sidelobes, H-Plane		-36 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	WR-34 Waveguide
Flange Type	UG-1530/U Flange
Size	2.10" (L) X 1.30" (W) X 0.95"(H)
Material	Aluminum
Finish	Gold Plated
Weight	0.5 Oz
Outline	AR-317






WR-34 Pyramidal Horn Antenna, 17 dBi Gain

Simulated Antenna Patterns @ 22 GHz

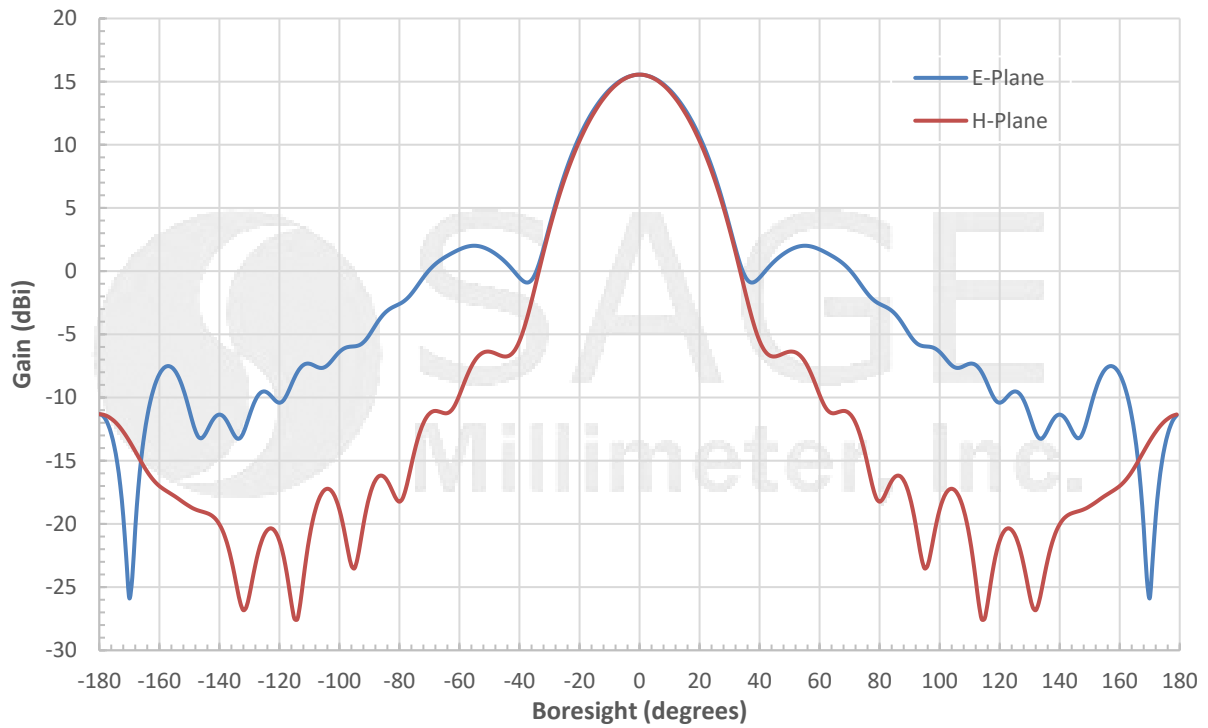


Simulated Antenna Patterns @ 27.5 GHz

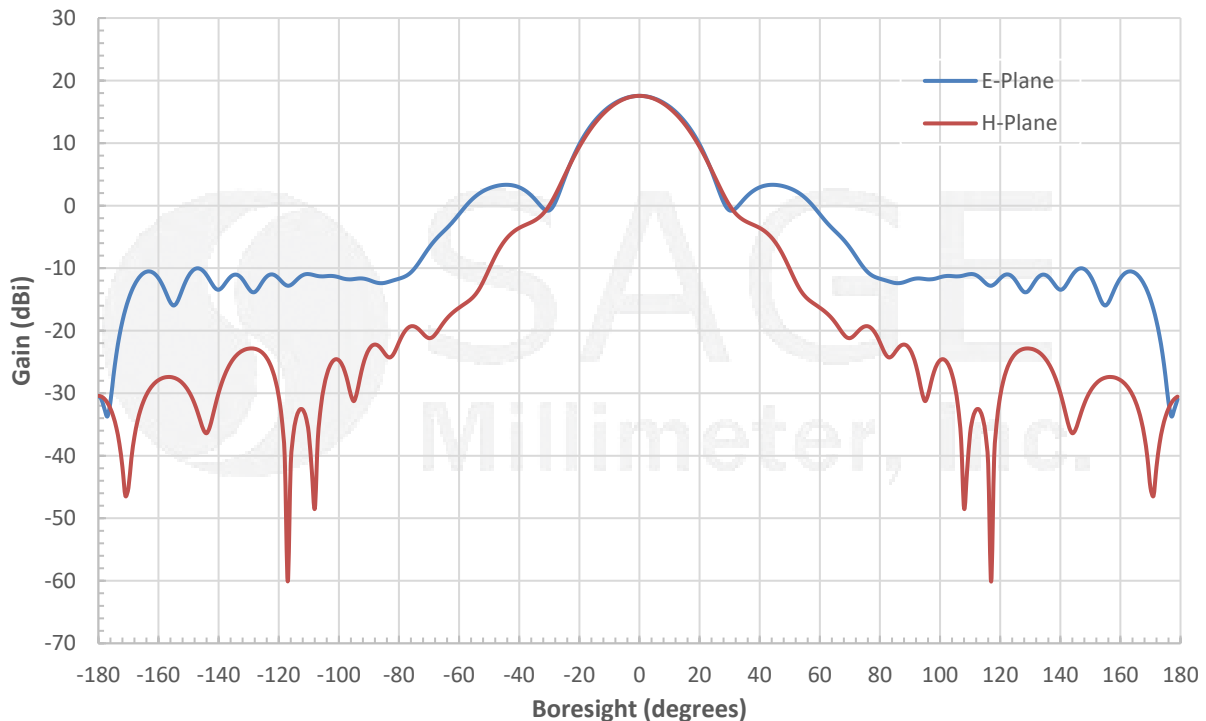




WR-34 Pyramidal Horn Antenna, 17 dBi Gain

Simulated Antenna Patterns @ 33 GHz

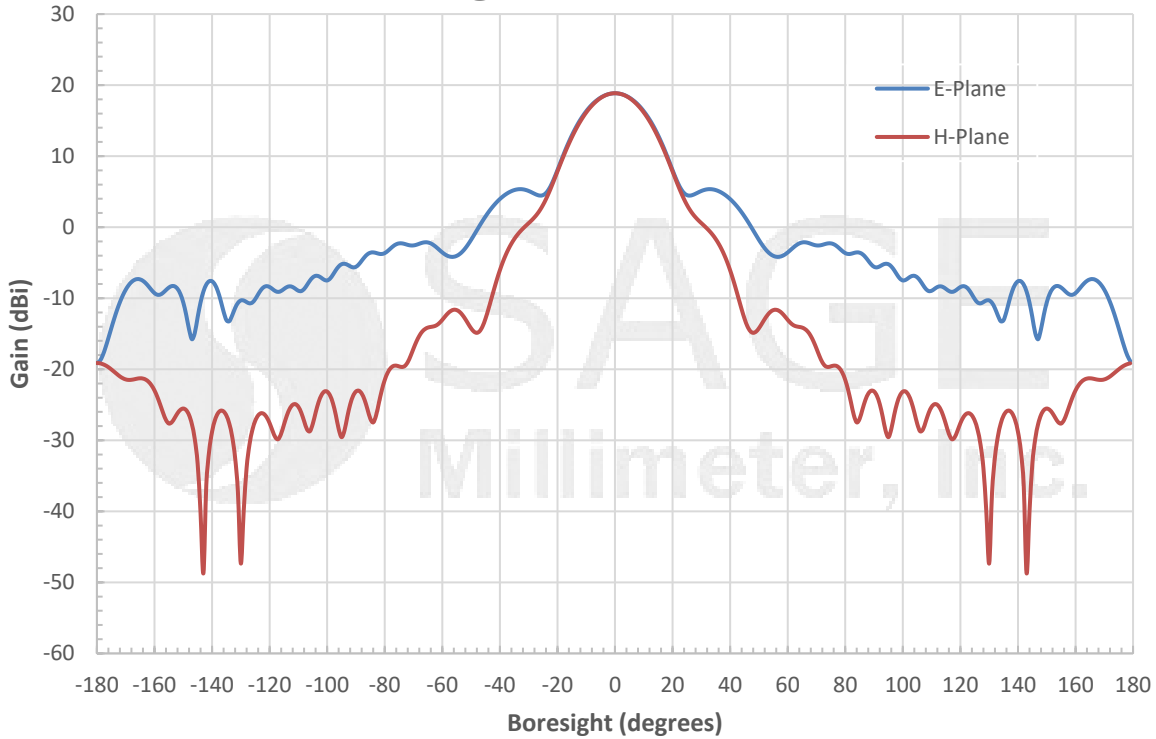


Simulated Return Loss vs. Frequency

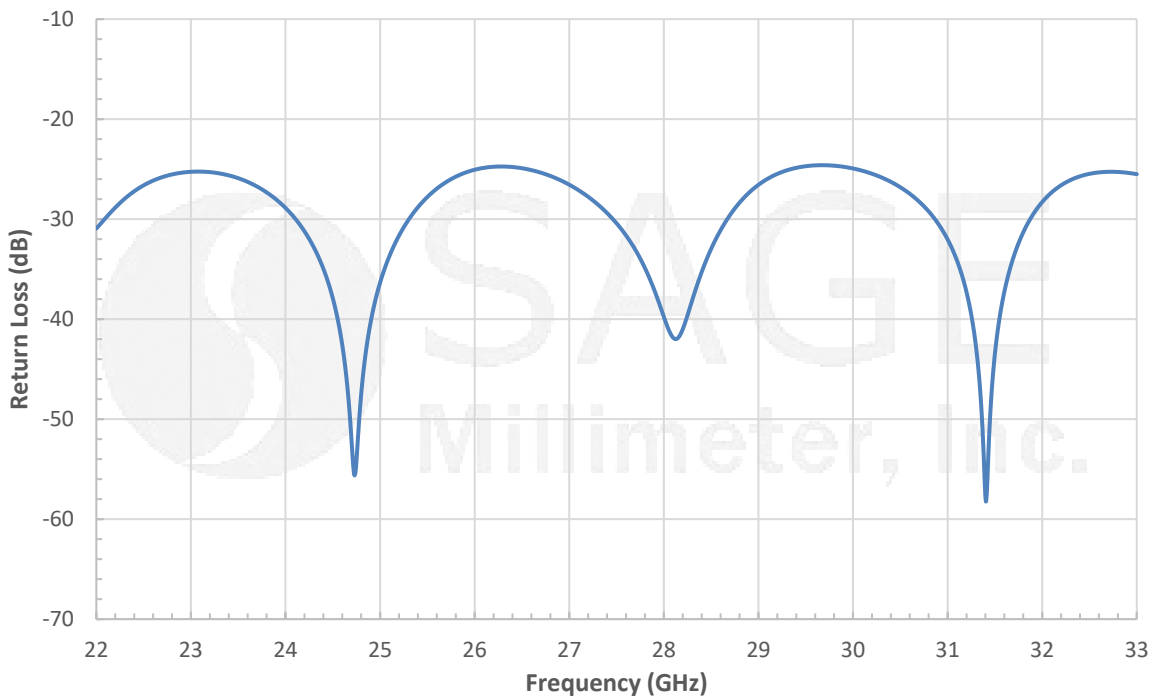




WR-34 Pyramidal Horn Antenna, 17 dBi Gain

Simulated Gain vs. Frequency

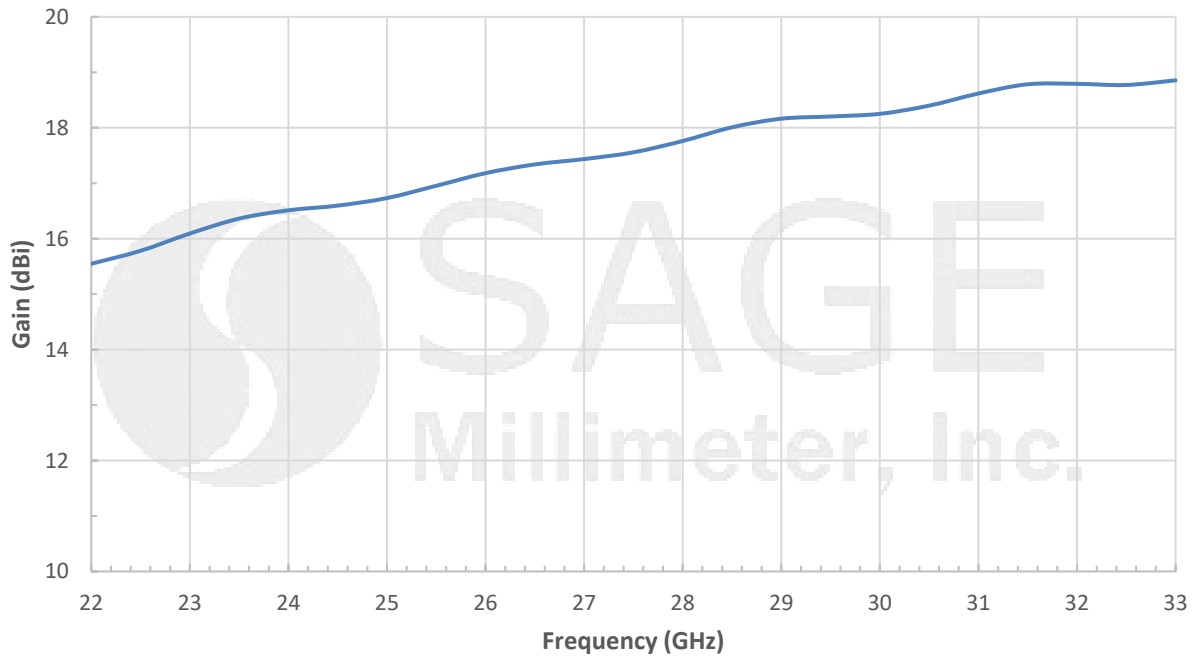

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

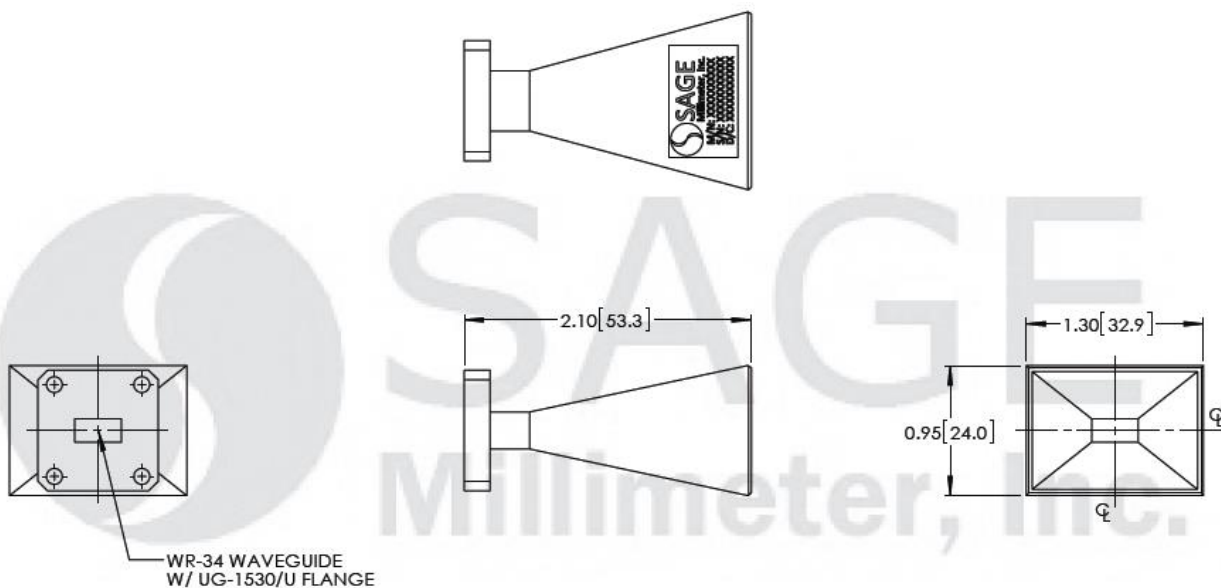



WR-34 Pyramidal Horn Antenna, 17 dBi Gain

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

