



8-Way Coaxial Power Splitter, 8 to 12.4 GHz

Description:

Model SCS-0831231418-SFSF-82 is a coaxial 8-way power splitter with a typical insertion loss of 1.4 dB at each output port and a typical isolation of 18 dB across the frequency range of 8 to 12.4 GHz. The power splitter has a nominal power handling of 30 W (CW) and a typical amplitude unbalance of ± 0.6 dB. The return loss for all ports is 11 dB typical. The RF connectors of the power splitter are female SMA connectors.



Features:

- Low Insertion Loss
- High Isolation
- Compact Package

Applications:

- Test Lab
- Sub-assemblies
- Test Instrumentation

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	8 GHz		12.4 GHz
Insertion Loss*		1.4 dB	
Amplitude Unbalance		± 0.6 dB	
Phase Unbalance		$\pm 5.0^\circ$	
Port Isolation		18 dB	
Return Loss		11 dB	
Forward Power Handling			30 W (CW)
Reverse Power Handling			2 W (CW)
Impedance		50 Ohms	
Specification Temperature		+25 °C	
Operating Temperature	-35 °C		+80 °C

*Note: The insertion loss is circuit loss, which does not include the power dividing loss.

Mechanical Specifications:


Item	Parameter
RF Connectors	SMA (F)
Case Material	Aluminum
Finish	Black Paint
Size	4.00" (L) x 2.27" (W) x 0.39" (H)
Outline	CS-X8-SR1

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



8-Way Coaxial Power Splitter, 8 to 12.4 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

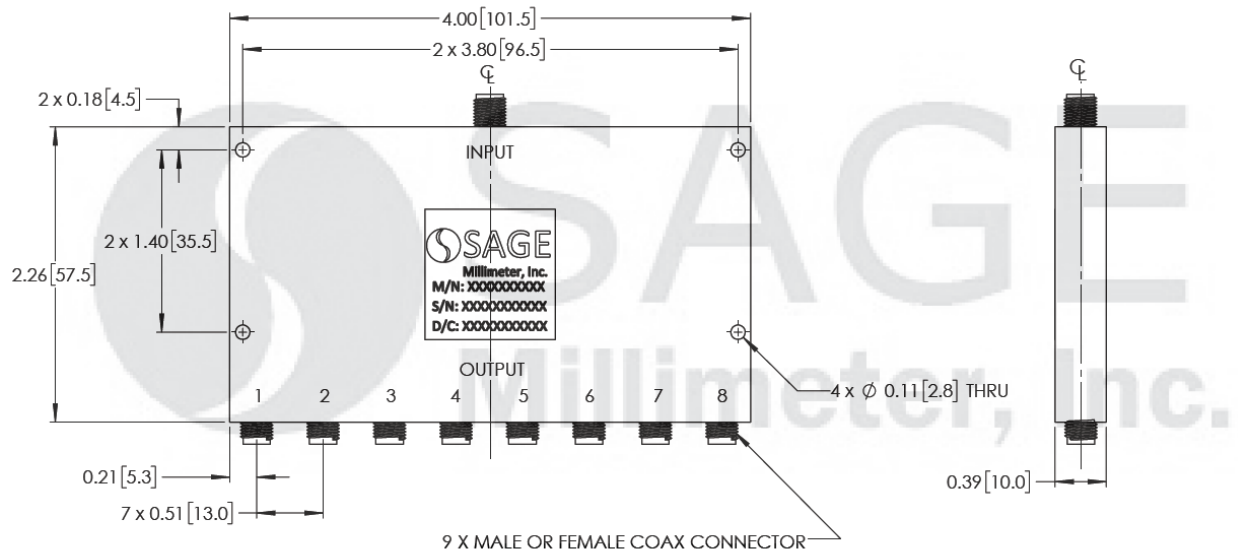

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the switch will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

