



## 16-Way Coaxial Power Splitter, 8 to 12.4 GHz

### Description:

**Model SCS-0831233416-SFSF-162** is a coaxial 16-way power splitter with a typical insertion loss of 3.4 dB at each output port and a typical isolation of 16 dB across the frequency range of 8 to 12.4 GHz. The power splitter has a nominal power handling of 30 W (CW) and a typical amplitude unbalance of  $\pm 0.8$  dB. The return loss for all ports is 11 dB typical. The RF connectors of the power splitter are female SMA connectors.



### Features:

- Low Insertion Loss
- High Isolation
- Compact Package

### Applications:

- Test Lab
- Sub-assemblies
- Test Instrumentation

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	8 GHz		12.4 GHz
Insertion Loss*		3.4 dB	
Amplitude Unbalance		$\pm 0.8$ dB	
Phase Unbalance		$\pm 8.0^\circ$	
Port Isolation		16 dB	
Return Loss		11 dB	
Forward Power Handling			30 W (CW)
Impedance		50 Ohms	
Specification Temperature		+25 °C	
Operating Temperature	-35 °C		+80 °C


\*Note: The insertion loss is circuit loss, which does not include the power dividing loss.

### Mechanical Specifications:

Item	Parameter
RF Connectors	SMA (F)
Case Material	Aluminum
Finish	Black Paint
Size	8.35" (L) x 2.36" (W) x 0.39" (H)
Outline	CS-X16-SR2

## 16-Way Coaxial Power Splitter, 8 to 12.4 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

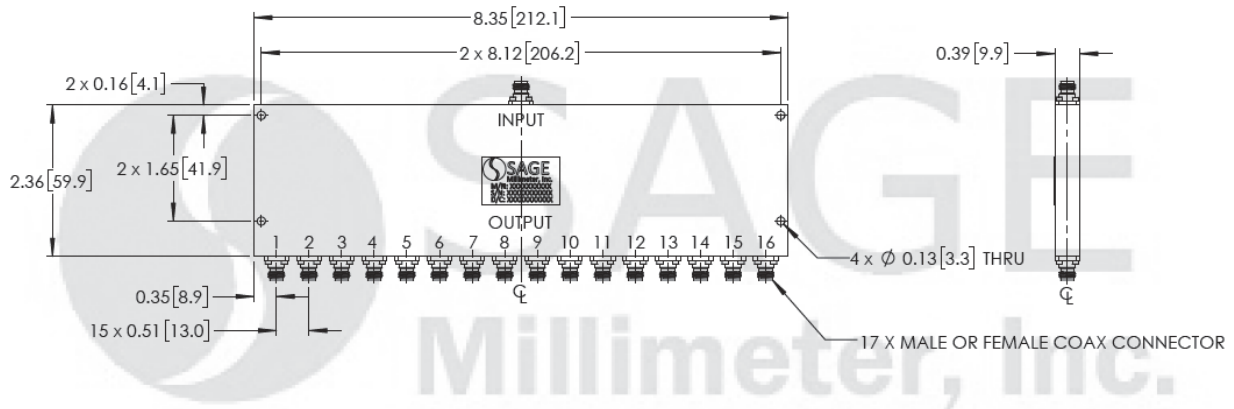

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings of the switch will damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

