



16-Way Coaxial Power Splitter, 12 to 18 GHz

Description:

Model SCS-1231833515-SFSF-162 is a coaxial 16-way power splitter with a typical insertion loss of 3.5 dB at each output port and a typical isolation of 15 dB across the frequency range of 12 to 18 GHz. The power splitter has a nominal power handling of 30 W (CW) and a typical amplitude unbalance of ± 1.2 dB. The return loss for all ports is 10 dB typical. The RF connectors of the power splitter are female SMA connectors.



Features:

- Low Insertion Loss
- High Isolation
- Compact Package

Applications:

- Test Lab
- Sub-assemblies
- Test Instrumentation

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	12 GHz		18 GHz
Insertion Loss*		3.5 dB	
Amplitude Unbalance		± 1.2 dB	
Phase Unbalance		$\pm 11.0^\circ$	
Port Isolation		15 dB	
Return Loss		10 dB	
Forward Power Handling			30 W (CW)
Impedance		50 Ohms	
Specification Temperature		+25 °C	
Operating Temperature	-35 °C		+80 °C


*Note: The insertion loss is circuit loss, which does not include the power dividing loss.

Mechanical Specifications:

Item	Parameter
RF Connectors	SMA (F)
Case Material	Aluminum
Finish	Black Paint
Size	8.35" (L) x 2.3" (W) x 0.39" (H)
Outline	CS-X16-SR2

16-Way Coaxial Power Splitter, 12 to 18 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

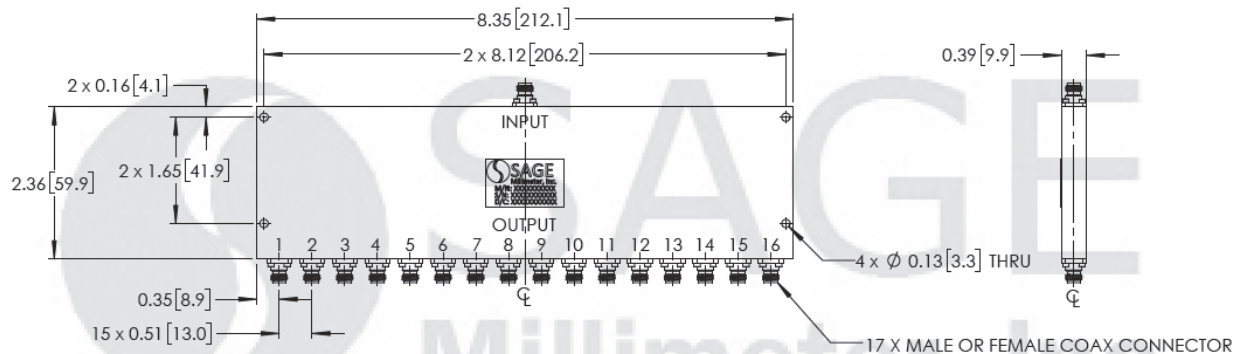

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the switch will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

