

## SCT-1M08F-UB

### 1.0 mm (M) to 0.8 mm (F) Coaxial Adapter

**SCT-1M08F-UB** is a 1.0 mm male to 0.8 mm female coaxial adapter that covers the frequency range of DC to 110 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a high return loss and typical insertion loss of 1.2 dB. The impedance of the adapter is 50 Ohms. Other configurations are available under different model numbers.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		110 GHz
Insertion Loss*		1.2 dB	
Return Loss		14 dB	
Impedance		50 $\Omega$	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

\*Insertion loss is tested back-to-back with SCT-1F08M-UB.

#### Mechanical Specifications:

Item	Specification
Connector 1 Type	1.0 mm Male
Connector 2 Type	0.8 mm Female
Body Material	Stainless Steel
Body Finish	Passivated
Contact Material	Beryllium Copper
Insulator Material	PEI
Weight	0.09 Oz (2.5 Grams)
Length	0.44"
Outline	CT-1M08F-LN1

#### ECCN

EAR99

#### FEATURES

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

#### APPLICATIONS


- Test Lab
- Sub-assemblies

#### SUPPLEMENTAL DETAILS




SCT-1M08F-UB

Typical Performance vs. Frequency

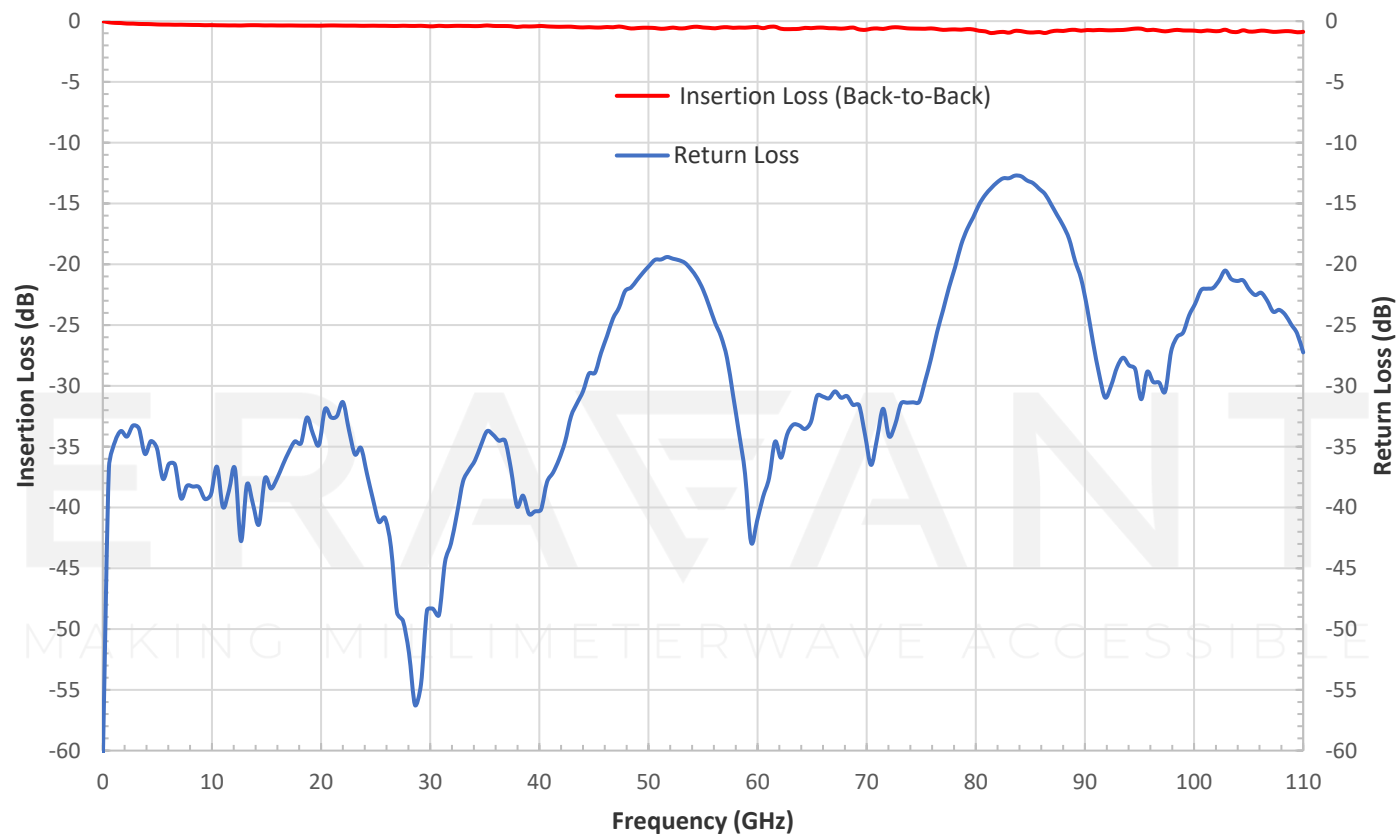

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

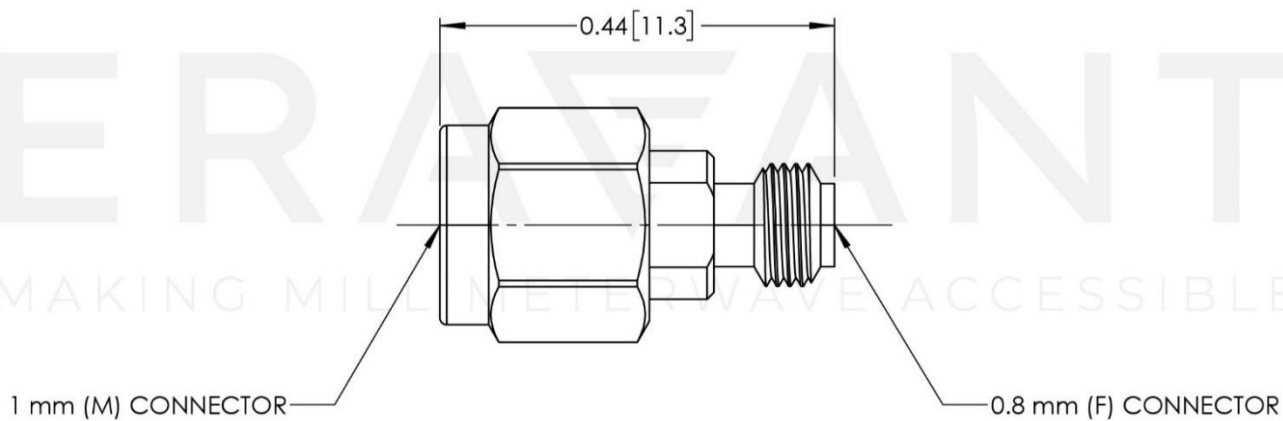

**NOTE:**

- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque should be applied:  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm). Torque wrench model SCH-06004-S1 is highly recommended.

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE