



## Linear to Circular Polarizer, Ku Band

### Description:

**Model SAS-153-59462-F1** is a Ku band, linear to circular polarizer that operates to cover the waveguide bandwidth from 12.4 to 18 GHz. The polarizer offers a typical insertion loss of 0.5 dB, a typical axial ratio of 1.2, and a typical return loss of 15 dB. The polarizer is fixed and can be used for either right-handed or left-handed polarization based on the direction of the input signal. The polarizer is often combined with Eravant's rectangular to circular waveguide transition (**SWT-62594-SA**), Ku band conical horn antenna (**SAC-2309-594-M2**) and scalar feed horn antenna (**SAF-1331831725-594-S1**) for various system applications.



### Features:

- Circular Waveguide Interface
- Low Insertion Loss
- Good Axial Ratio

### Applications:

- Antenna Ranges
- Waveguide Polarization Selection
- Radar Systems
- Communication Systems

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	12.4 GHz	15.2 GHz	18.0 GHz
Bandwidth		±2.8 GHz	
Insertion Loss		0.5 dB	
Axial Ratio		1.2	
Return Loss		15 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

### Mechanical Specifications:


Item	Specification
Waveguide	0.594" Diameter Circular Waveguide UG-419/U-M Flange
Length	3.0"
Case Material	Aluminum
Inner Finish	Silver Plated
Outer Finish	Grey Paint
Weight	3.2 Oz
Outline	AS-F6-M






## Linear to Circular Polarizer, Ku Band

Typical Insertion Loss vs Frequency

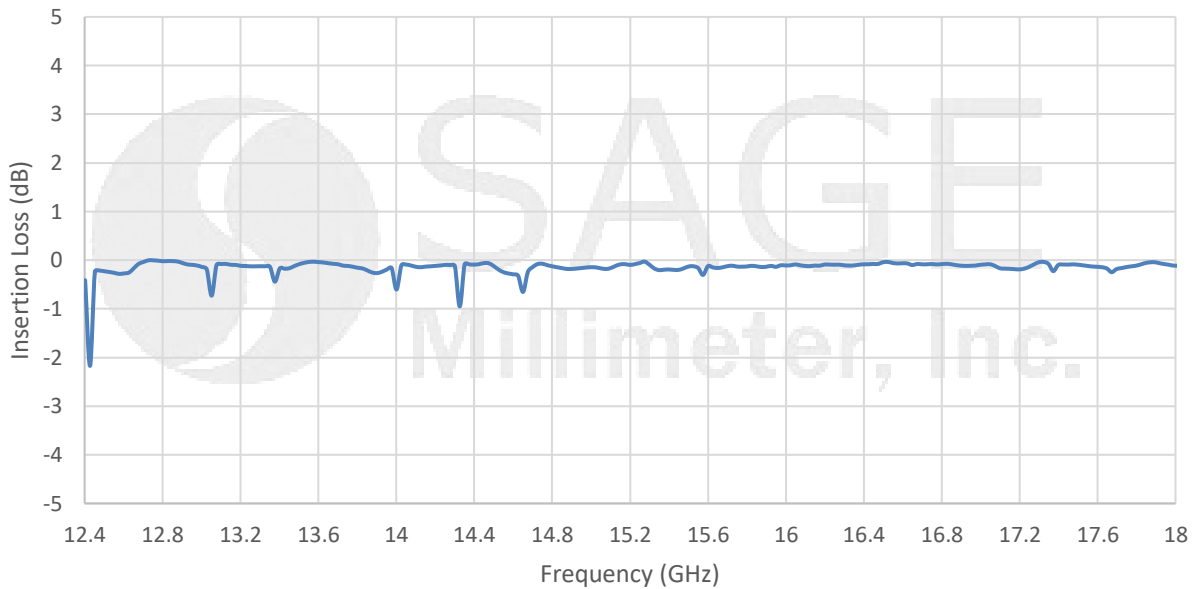

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

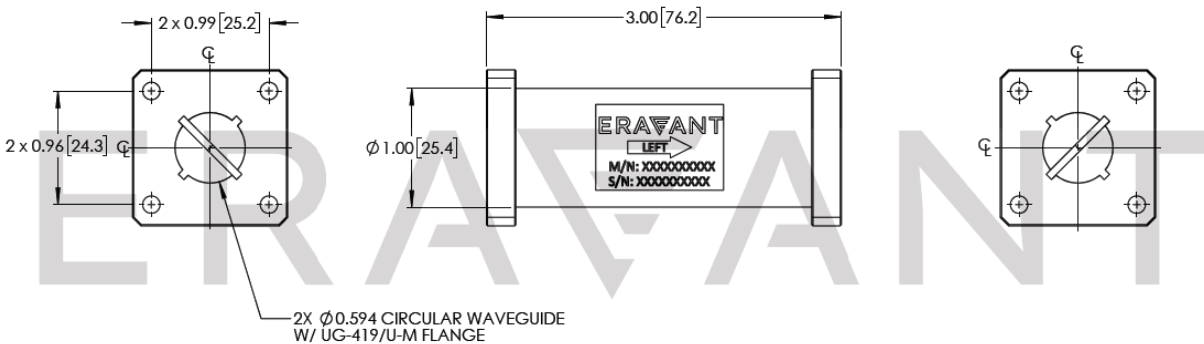

**Note:**

- The Polarizer is offered as LHCP. However, it can be used as RHCP by reversing the input and output ports.
- All data are presented using a limited sample lot, actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- Eravant reserves the right to change the information presented without notice.

**Caution:**

- Foreign objects in the waveguide will affect the polarizer performance and may damage the polarizer.





## Linear to Circular Polarizer, Ku Band

### LHCP and RHCP Polarization Configuration Notes and Diagram:

- The polarizer's product label indicates the direction of **Left-Handed Circular Polarization (LHCP)**.
- An example configuration diagram is provided below. The diagram indicates the input and output ports and the orientation in which the polarizer is to be attached to the rest of the components to obtain a **LHCP** signal at the output port.
- The polarizer can be configured to obtain a **Right-Handed Circular Polarized (RHCP)** signal at the output port by reversing the input and output ports as shown in the second diagram.

