

1.35 mm (F) to 1.35 mm (F) Coaxial Adapter, Bulkhead

Description:

Model SCT-EFEF-UB-B is a 1.35 mm female to 1.35 mm female coaxial adapter with a bulkhead that covers the frequency range of DC to 90 GHz. This coaxial adapter offers efficient transitioning between the coaxial connectors with a typical return loss of 16 dB. The impedance of the adapter is 50 ohms. Other configurations are available under different model numbers.



Features:

- Instrumentation Grade
- High Return Loss
- Low Insertion Loss

Applications:

- Test Lab
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		90 GHz
Return Loss		16 dB	
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Connector 1 Type	1.35 mm Female
Connector 2 Type	1.35 mm Female
Panel Wall Thickness	0.157" [4 mm] (Max)
Body Material	Stainless Steel
Body Finish	Passivated
Contact Material	Beryllium Copper
Insulator Material	PEI
Adapter Body Style	Bulkhead
Weight	0.2 Oz
Outline	CT-EFEF-B-LN1



1.35 mm (F) to 1.35 mm (F) Coaxial Adapter, Bulkhead

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

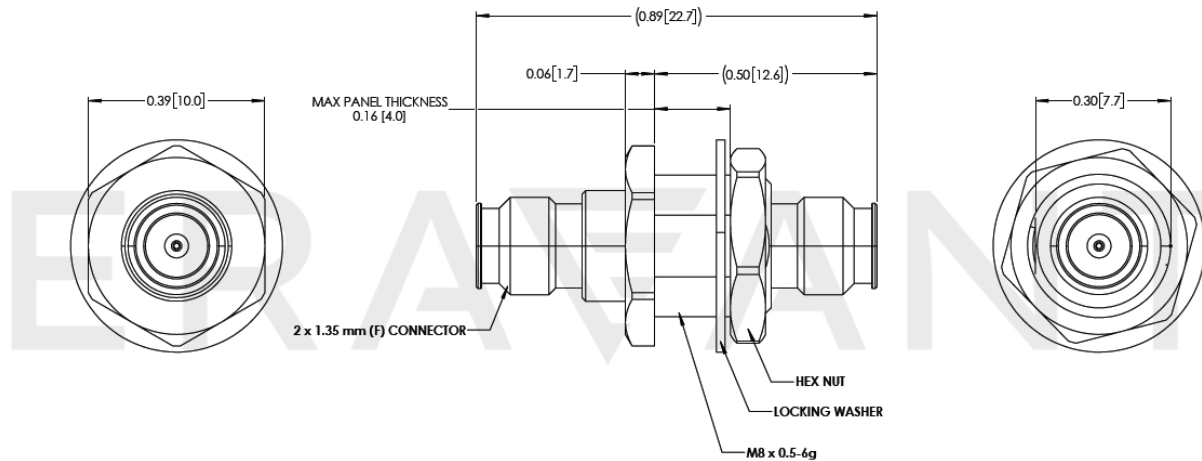

Note:

- Eravant reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

