

WR-22 Linear to Circular Polarizer, 33-50 GHz

SAS-423-25022-F1 is a Q band, linear to circular polarizer that operates from 33 GHz to 50 GHz. The polarizer offers a typical insertion loss of 0.3 dB, typical axial ratio of 1.2, and a typical return loss of 20 dB. The polarizer is fixed and can be used for either right-handed or left-handed polarization based on the direction of the input signal. The polarizer is often combined with Eravant's rectangular to circular waveguide transition (**SWT-22250-SB**) and (**SAC-2309-250-S2**) for various system applications.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	33 GHz		50 GHz
Insertion Loss		0.3 dB	
Axial Ratio		1.2	
Return Loss		20 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		-85°C

Mechanical Specifications:

Item	Specification
RF Ports	Ø0.250" Circular Waveguide with UG-383/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.4 Oz
Outline	AS-FQF-250-A

ECCN

EAR99

FEATURES

- Full Band Coverage
- Compact Size
- Good Axial Ratio


APPLICATIONS

- Antenna Ranges
- Waveguide Polarization Selection
- Communication Systems


SUPPLEMENTAL DETAILS



Measured Insertion loss and Return Loss vs Frequency

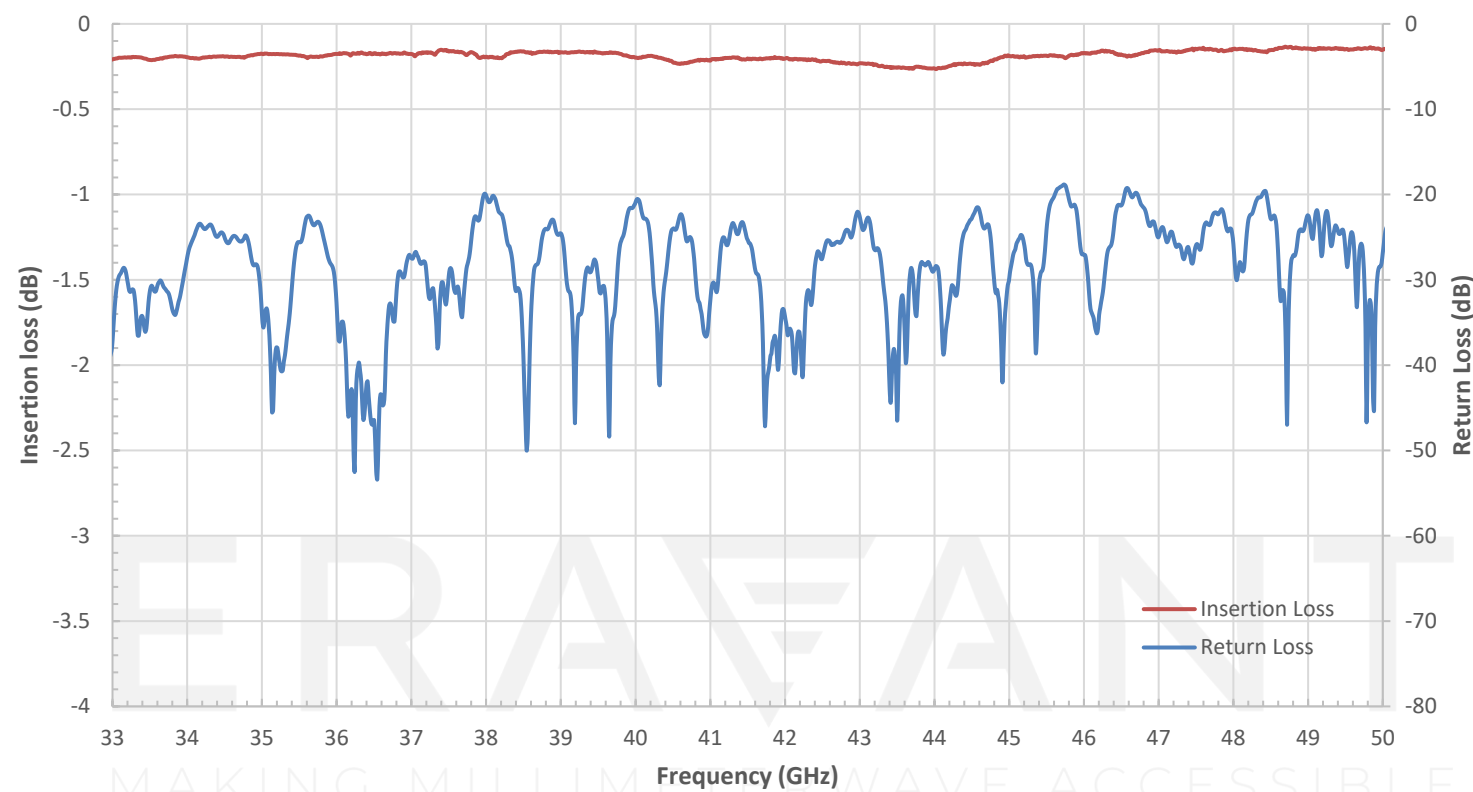


Measured Axial Ratio Vs Frequency

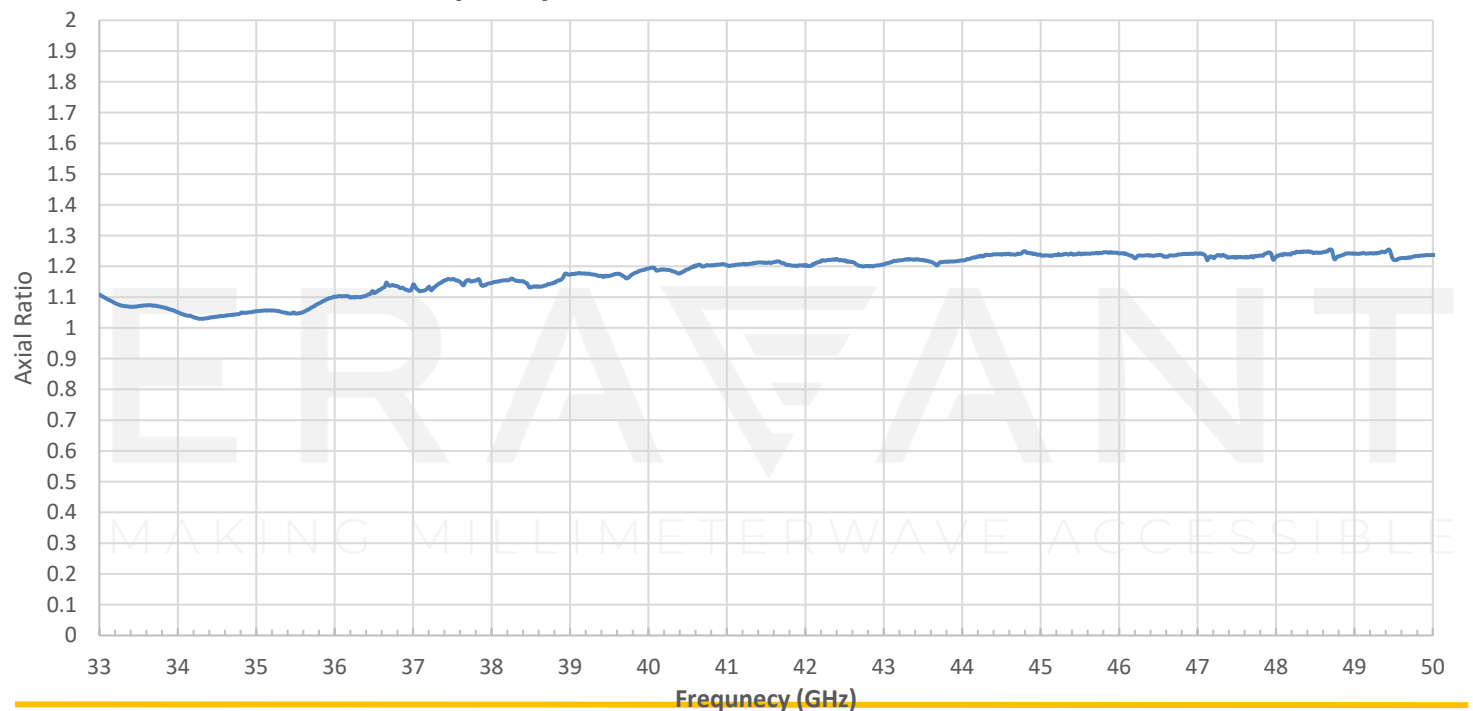

LHCP and RHCP Polarization Configuration Notes and Diagram:

- The polarizer's product label indicates the direction of **Left-Handed Circular Polarization (LHCP)**.
- An example configuration diagram is provided below. The diagram indicates the input and output ports and the orientation in which the polarizer is to be attached to the rest of the components to obtain an LHCP signal at the output port.
- The polarizer can be configured to obtain a **Right-Handed Circular Polarized (RHCP)** signal at the output port by reversing the input and output ports as shown in the second diagram.

LEFT-HANDED CIRCULAR POLARIZATION EXAMPLE CONFIGURATION

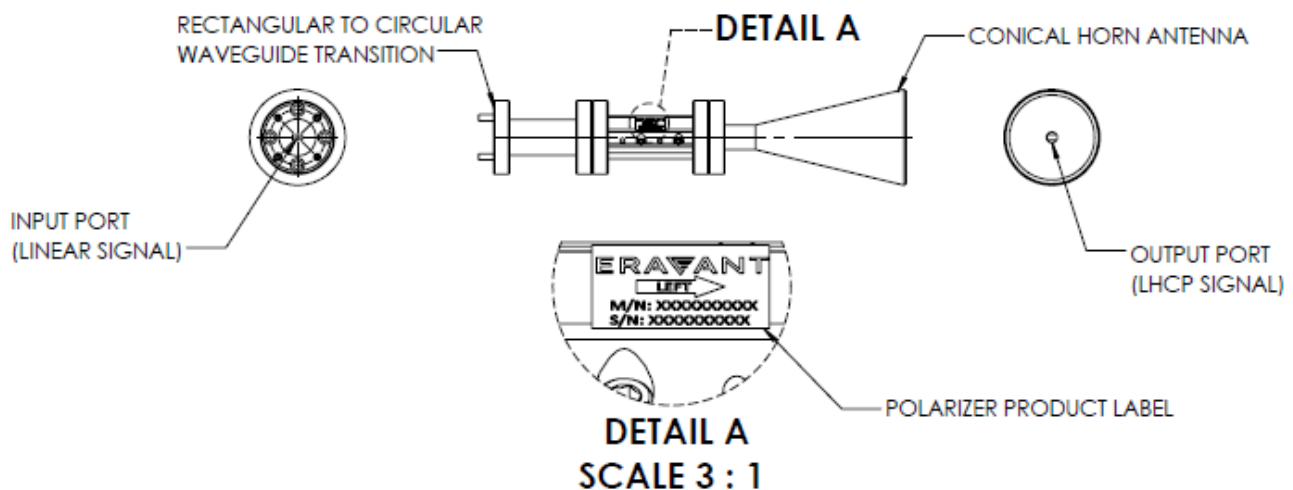

RIGHT-HANDED CIRCULAR POLARIZATION EXAMPLE CONFIGURATION

