



E-Band Orthomode Transducer

Description:

Model SAT-FE-12212-S1 is a full band, WR-12 orthomode transducer (OMT) that operates between 60 and 90 GHz. The OMT separates a circular or elliptical polarized waveform into two linear, orthogonal waveforms or combines two linear polarized waveforms into one circular or elliptical polarized waveform or vice versa. The OMT also supports either vertical or horizontal polarized waveguide forms with more than 30 dB cross polarization rejections. The OMT shows high port isolation while providing a low insertion loss. The OMT is configured with a 0.122" x 0.122" square waveguide for the antenna port and two WR-12 waveguides for the horizontal and vertical ports. All ports have standard UG-387/U anti-cocking flanges and 4-40 threaded holes.



Features:

- Full Waveguide Band Operation
- High Port Isolation
- High Crosspol Rejection
- Low Insertion Loss

Applications:

- Radar Systems
- Communication Systems
- Antenna Ranges
- Circular and Linear Waveform Separation and Combination

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	60 GHz		90 GHz
Insertion Loss (H to A Port)		1.2 dB	
Insertion Loss (V to A Port)		0.8 dB	
Isolation (H to V Port)		40 dB	
Cross Polarization (H to A Port)		35 dB	
Cross Polarization (V to A Port)		35 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.122" x 0.122" Square Waveguide
Horizontal and Vertical Ports	WR-12 Waveguide
Flange Type	UG-387/U Anti-Cocking Flange (on all ports)
Material	Aluminum
Finish	Gold Plated
Weight	1.0 Oz
Size	1.30" (L) x 0.80" (W) x 0.80" (H)
Outline	AT-ES-122-F-A






E-Band Orthomode Transducer

Typical Performance vs. Frequency

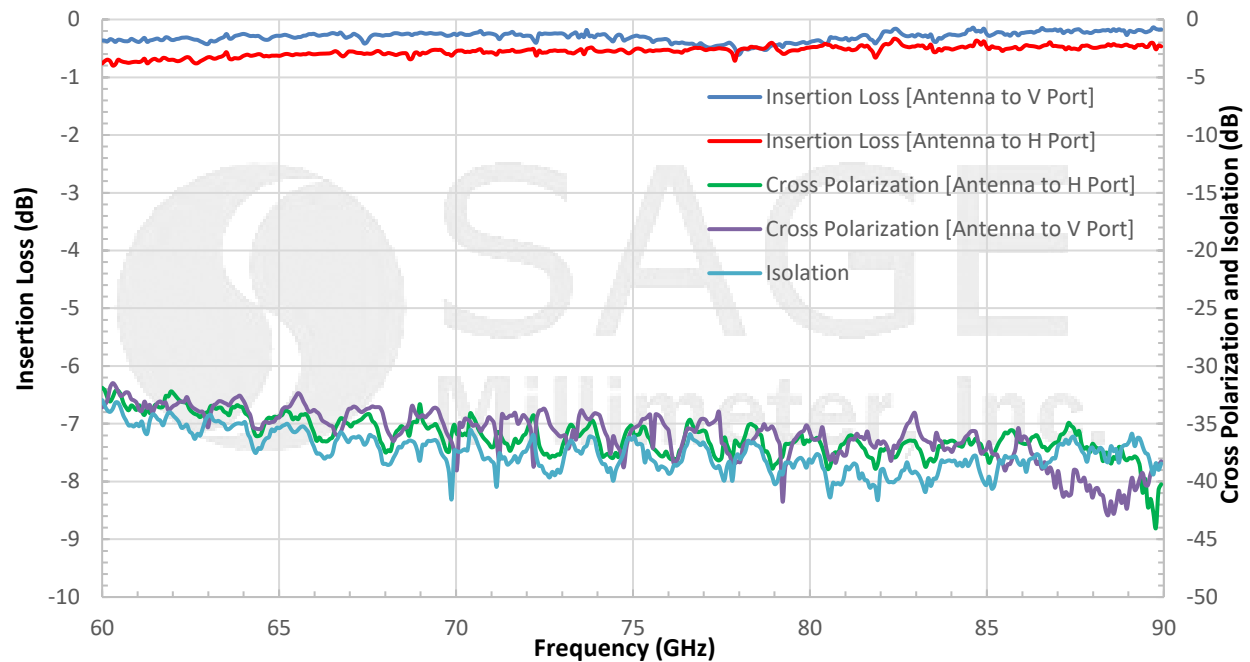

*Due to the limitations of the dynamic range of the network analyzer used, the actual isolation and polarization is much lower than shown.

Typical Return Loss vs. Frequency

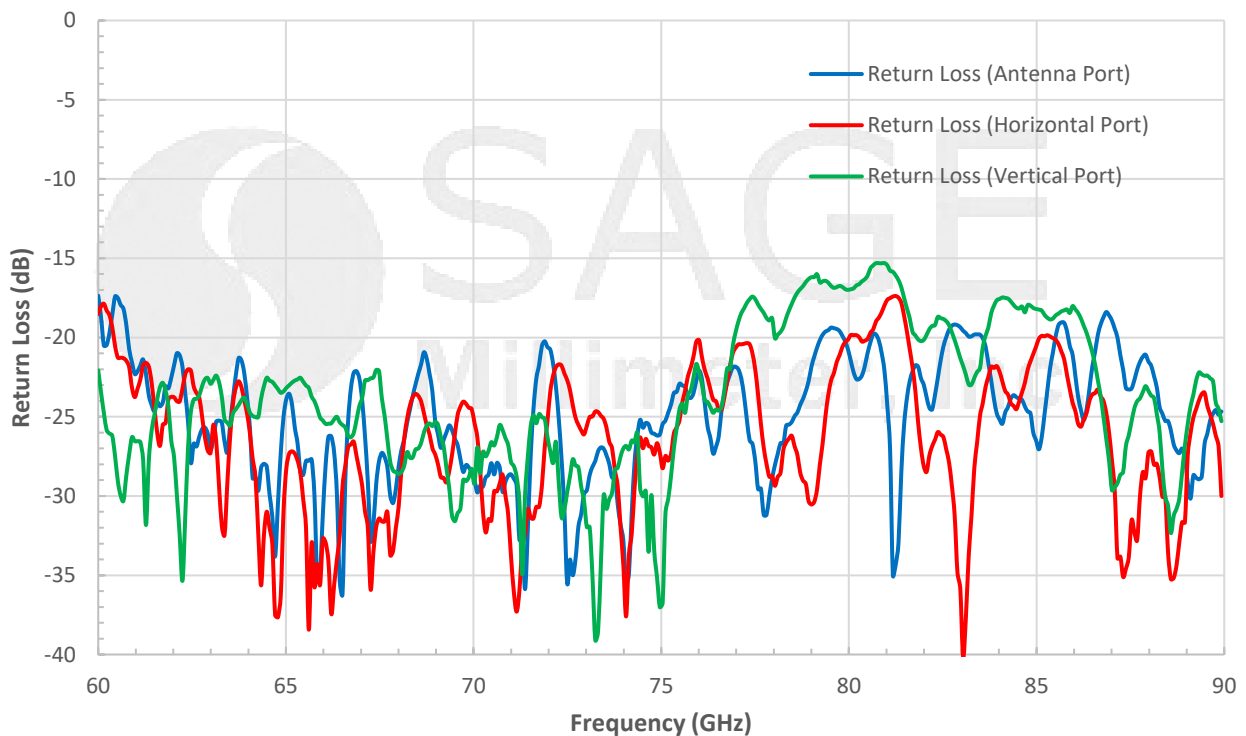


www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



E-Band Orthomode Transducer

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

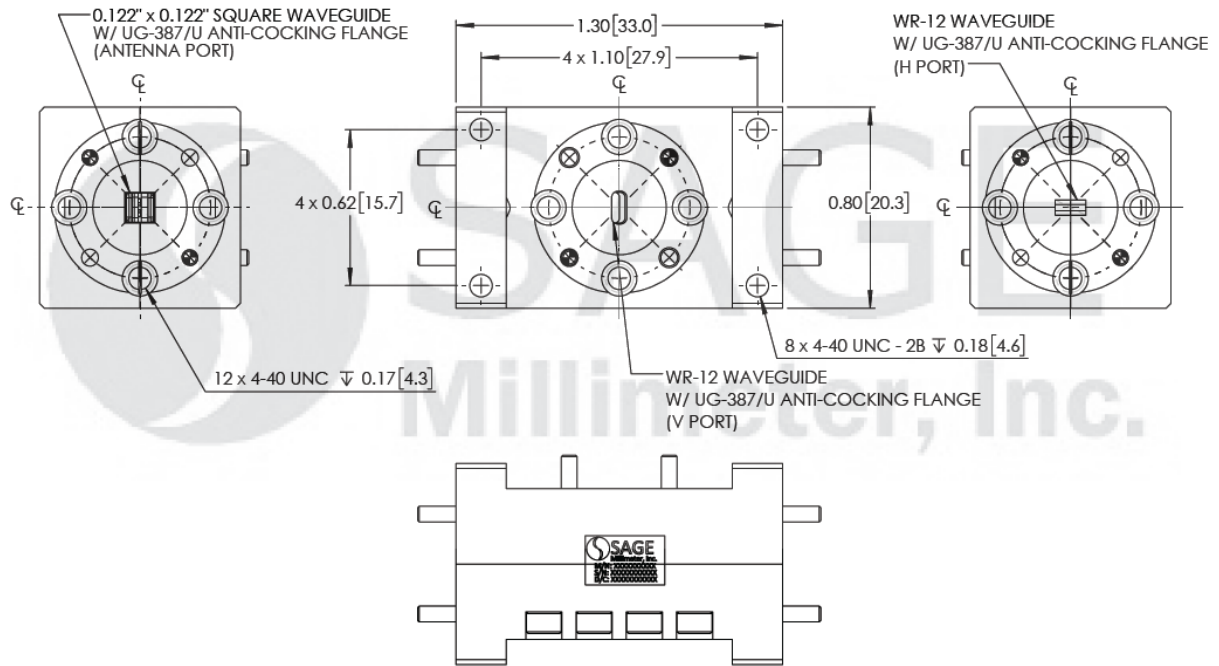

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguides will cause performance degradation and possible device damage.

