

## 2.4 mm (M) to 2.4 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

### Description:

**Model SCW-2M2M060-F1-PM** is a 60" long, flexible, phase matched coaxial cable with 2.4 mm male connectors that cover the frequency range of DC to 50 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



### Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		50 GHz
Insertion Loss @ 18 GHz		< 4.5 dB	
Insertion Loss @ 26.5 GHz		< 5.8 dB	
Insertion Loss @ 40 GHz		< 7.6 dB	
Insertion Loss @ 50 GHz		< 7.9 dB	
Return Loss @ 50 GHz		14 dB	
Impedance		50 $\Omega$	
Phase Match (Unit to Unit)		$\pm 10^\circ$	
Breakdown Voltage			500 Volts
Radiation Shielding		90 dB	
Power Handling @ 40 GHz			15 W (CW)
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-40 $^\circ\text{C}$		+85 $^\circ\text{C}$


### Mechanical Specifications:

Item	Specification
Connectors	2.4 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEEK/PEI
Cable Jacket Material	PFA
Cable Outer Diameter	0.087"
Length	60"
Minimum Bending Radius	0.5"
Repeated Bending Radius	0.867"
Weight	1.3 Oz
Outline	CW-22-F8




## 2.4 mm (M) to 2.4 mm (M) Coaxial Cable, Flexible, 60", Phase Matched

### Typical Performance vs. Frequency

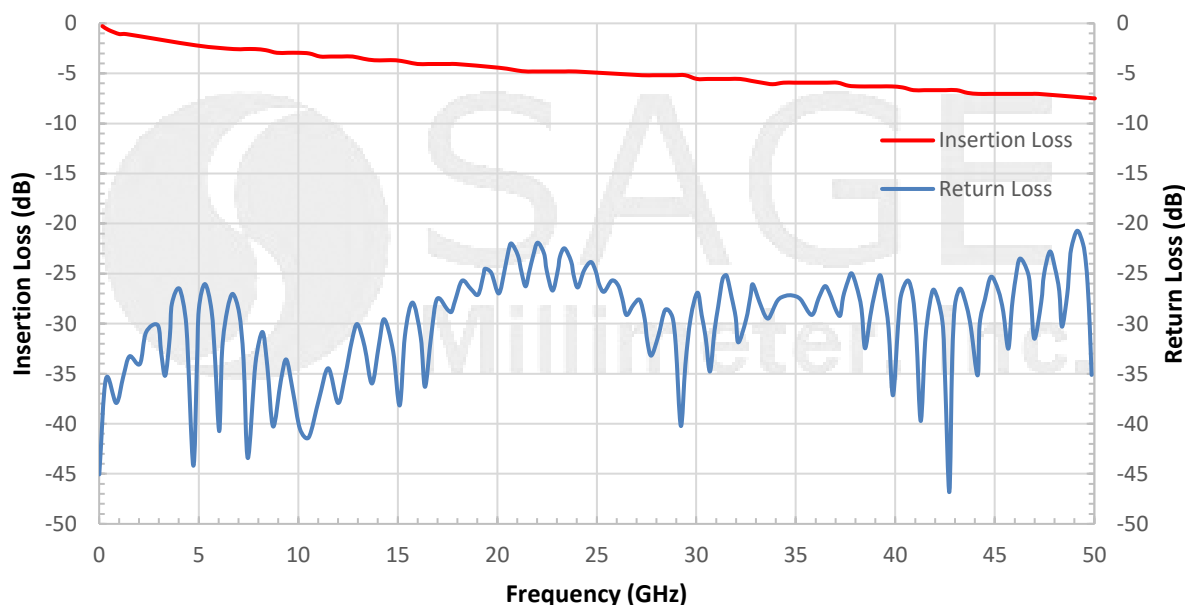

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

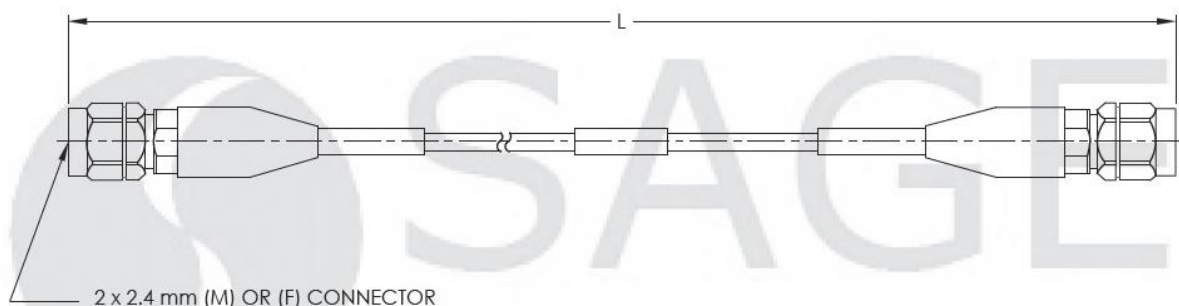

#### Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### Caution:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com