

# 2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Semi-Rigid, 48"

## **Description:**

**Model SCW-KMKM048-S1** is a 48" long, semi-rigid coaxial cable with 2.92 (K) mm male connectors that cover the frequency range of DC to 40 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



#### **Features:**

- High Return Loss
- Low Insertion Loss
- Semi-Rigid

# Applications:

- Test Lab
- Sub-assemblies
- System Integration

## **Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
Insertion Loss @ 18 GHz		4.0 dB	
Insertion Loss @ 26.5 GHz		5.0 dB	
Insertion Loss @ 32 GHz		5.7 dB	
Insertion Loss @ 40 GHz		6.6 dB	
Return Loss @ 40 GHz		18 dB	
Impedance		50 Ω	
Breakdown Voltage	/ V		500 V
Radiation Shielding		120 dB	
Velocity Factor		70%	
Power Handling @ 40 GHz			20 W (CW)
Specification Temperature	. /	+25 °C	
Operating Temperature	-40 °C	eter. I	+85 °C

# **Mechanical Specifications:**


Item	Specification	
Minimum Bending Radius	0.126"	
Connectors	2.92 (K) mm Male	
Connector Material	Passivated Stainless Steel	
Cable Conductor	Brass, Gold Plated	
Cable Insulators	PEEK/PEI	
Cable Outer Diameter	0.087"	
Length	48"	
Weight	0.7 Oz	
Outline	CW-KK-S8	




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com

# 2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Semi-Rigid, 48"

### **Typical Performance vs. Frequency**

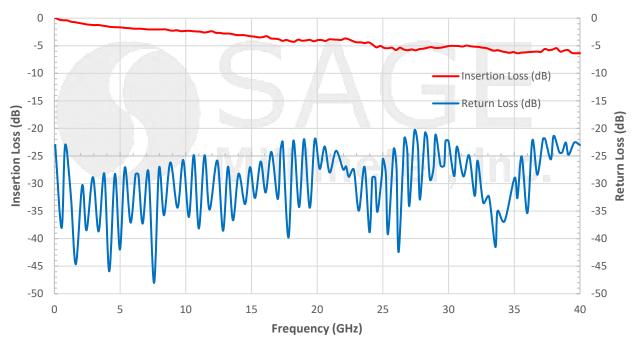

## Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

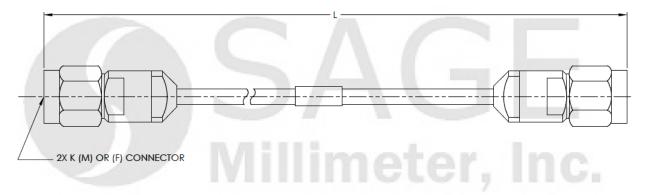

#### Note:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

#### **Caution:**

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter** torque wrench, model SCH-08008-U3, is highly recommended.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com