



X Band Slotted Waveguide Array Antenna, 9.7 GHz, 27 dBi, 16° x 2°

Description:

Model SAW-9629822716-90-L2-WR is a weather resistant X-band slotted waveguide array antenna that operates from 9.6 to 9.8 GHz. The antenna offers 27 dBi nominal gain and a typical half power beamwidth of 16 degrees on the E-plane and 2 degrees on the H-plane, respectively. Compared to microstrip antennas, the slotted waveguide array antenna offers higher aperture efficiency. The antenna also offers typical side lobes of -15 dB or better and supports linear, vertical polarized waveforms. The input port of this antenna is WR-90 Waveguide.



Features:

- Rectangular Waveguide Interface
- High Aperture Efficiency
- Flat and Low Profile
- Linear Polarization
- High Return Loss
- Weather Resistance

Applications:

- Antenna Ranges
- Communication Systems
- Radar Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	9.6 GHz		9.8 GHz
Gain		27 dBi	
Polarization	Linear, Vertical		
3 dB Beamwidth, Vertical		16°	
3 dB Beamwidth, Horizontal		2°	
Side Lobe Level		-15 dB	
Return Loss		13 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-90 Waveguide
Flange Type	UG-39/U Grooved Compatible Flange
Body Material	Aluminum
Body Finish	Chem Film
Radome Material	Black LEXAN
Weight	55 lb
Size	38.50" (L) x 11.00" (W) x 2.39" (H)
Outline	AW-RX-0216




www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com




X Band Slotted Waveguide Array Antenna, 9.7 GHz, 27 dBi, 16° x 2°

Gain vs. Frequency for SAW-9629822716-90-L2-WR

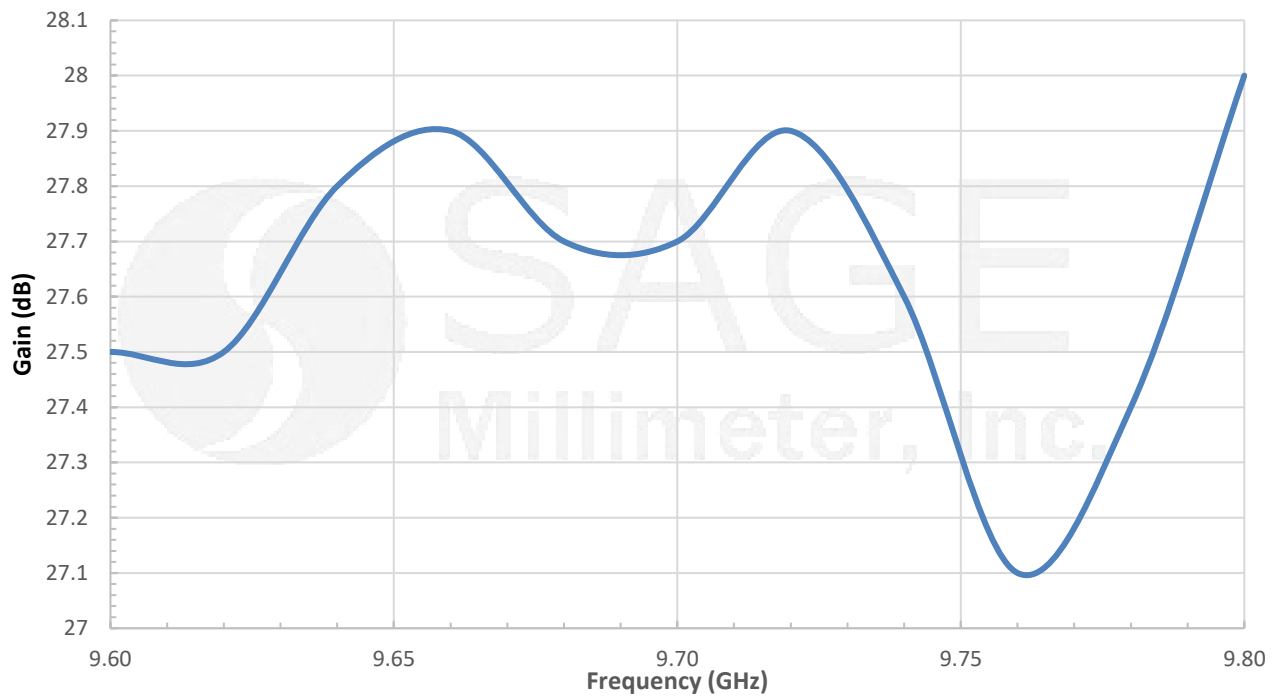


Return Loss vs. Frequency for SAW-9629822716-90-L2-WR

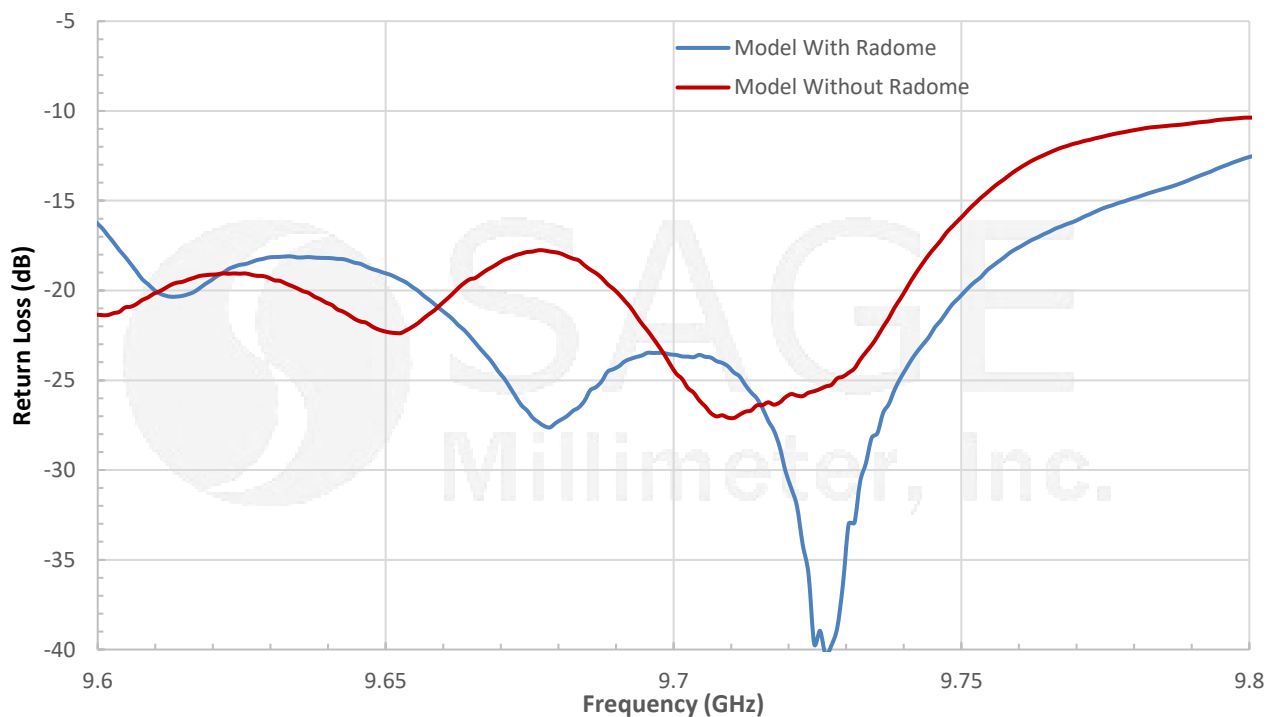




X Band Slotted Waveguide Array Antenna, 9.7 GHz, 27 dBi, 16° x 2°

Measured Antenna Patterns @ 9.6 GHz


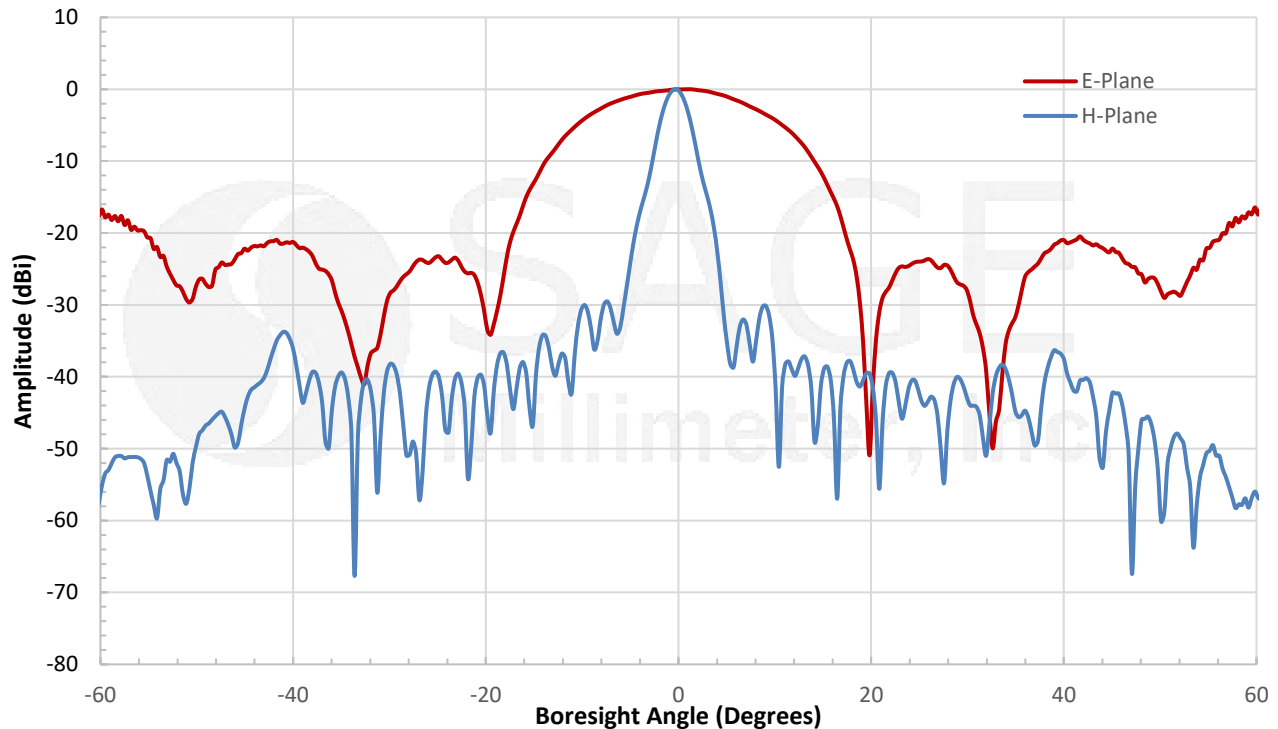


Measured Antenna Patterns @ 9.7 GHz

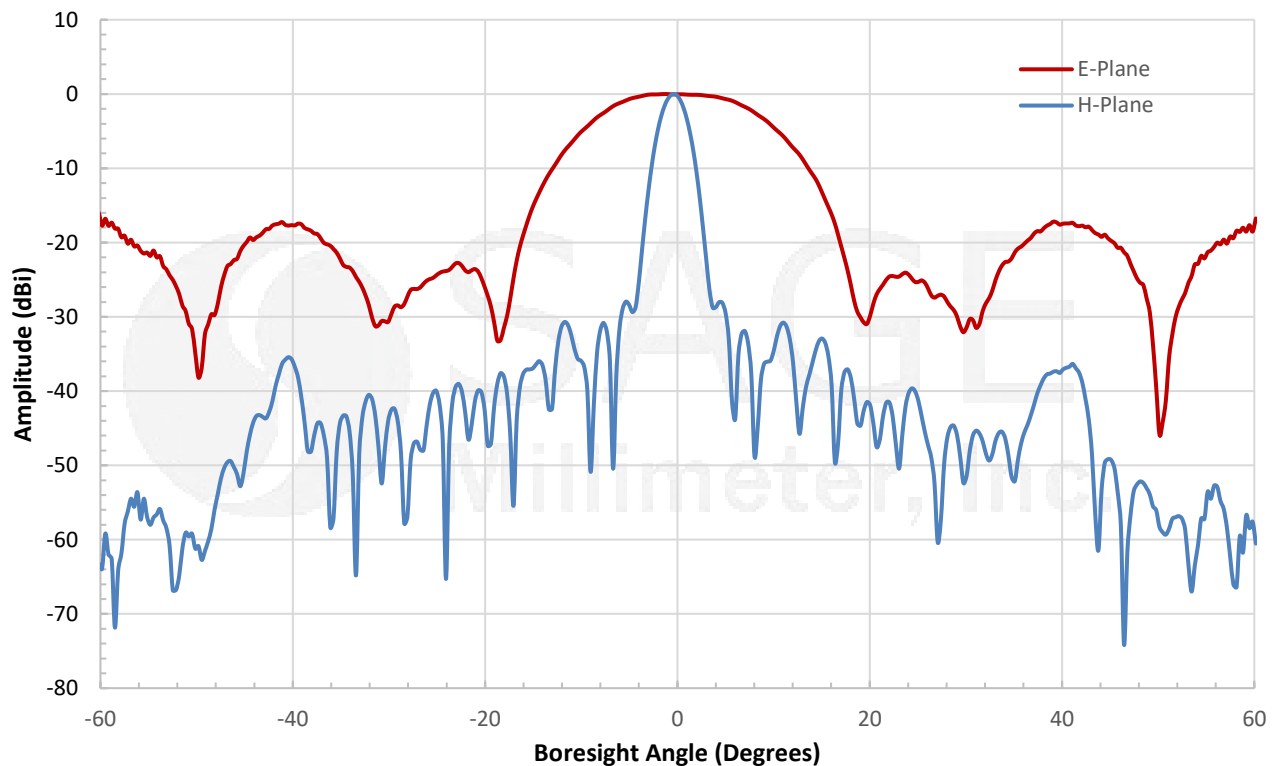

X Band Slotted Waveguide Array Antenna, 9.7 GHz, 27 dBi, 16° x 2°

Measured Antenna Patterns @ 9.8 GHz

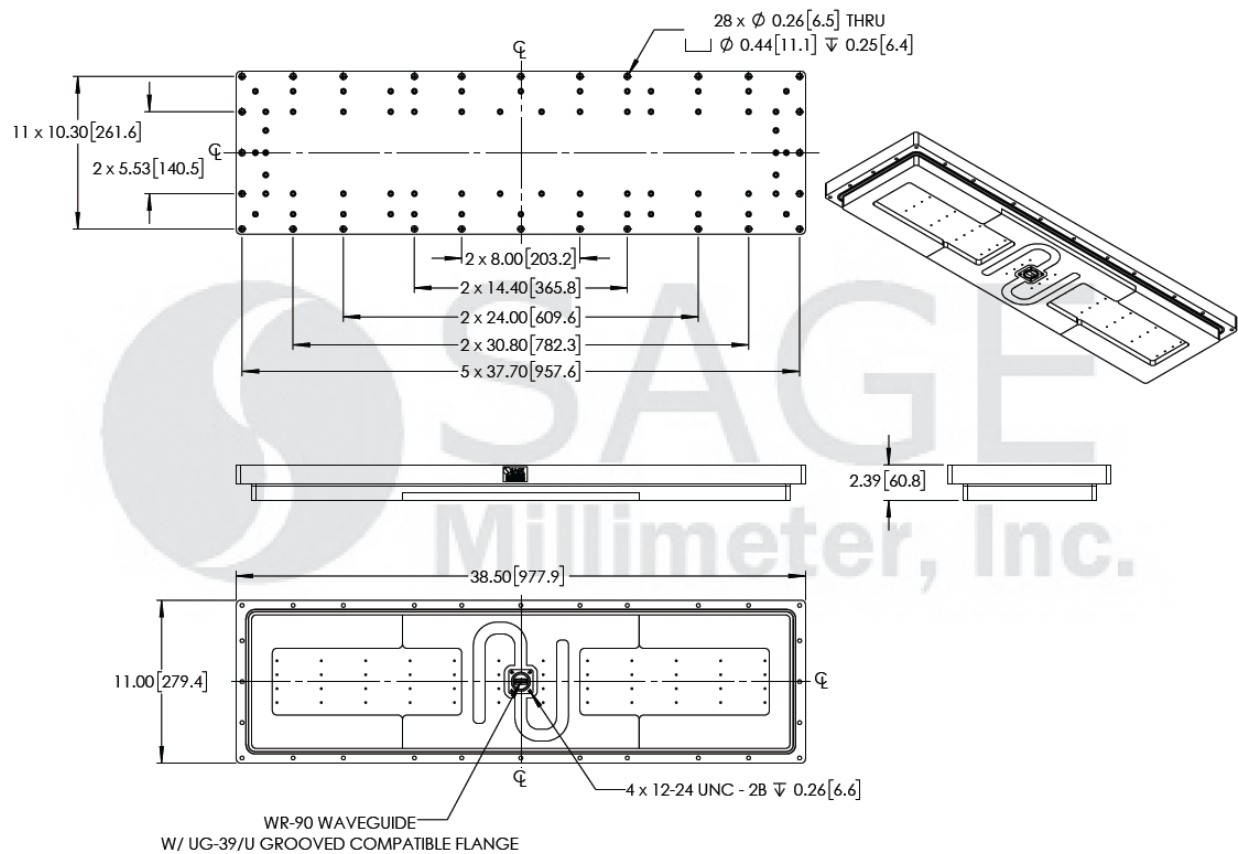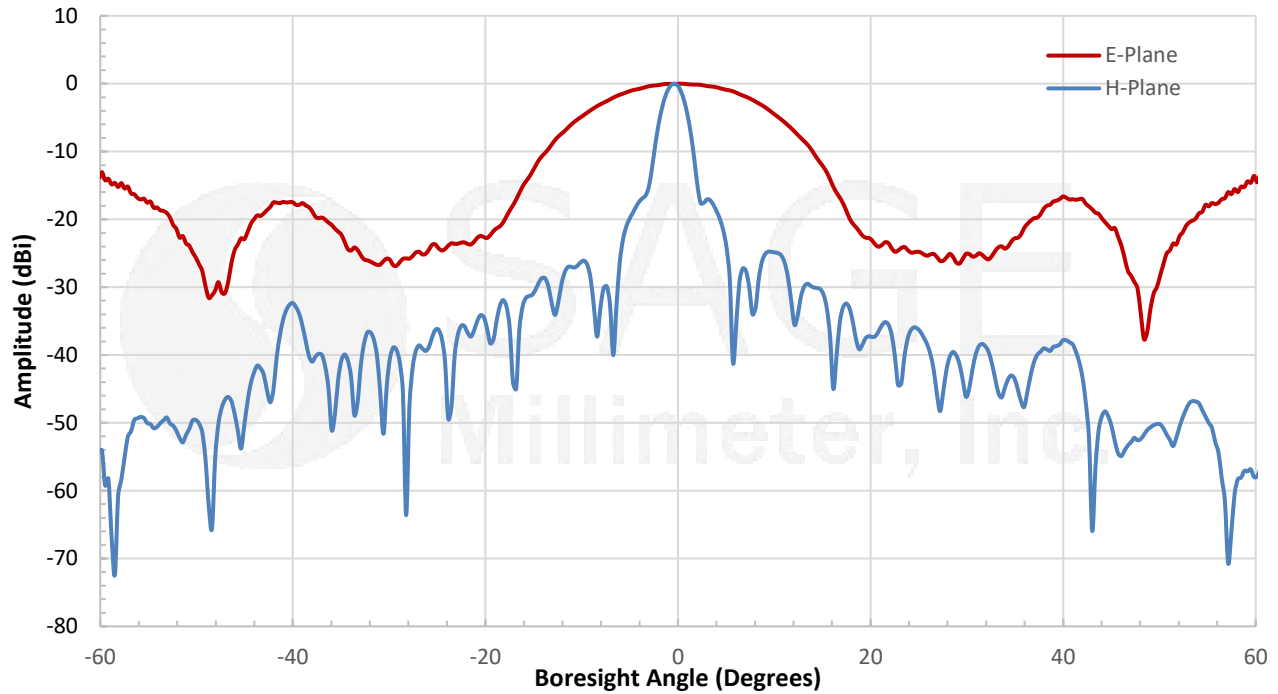

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



X Band Slotted Waveguide Array Antenna, 9.7 GHz, 27 dBi, 16° x 2°

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C room temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

