

Broadband Amplifier, 50 to 95 GHz, 25 dB Gain, +10 dBm P_{1dB}, 7 dB NF

Description:

Model SBB-5039532510-1M1M-S1 is a broadband amplifier with a typical small signal gain of 25 dB, a nominal P_{1dB} of +10 dBm, and a typical noise figure of 7.0 dB across the frequency range of 50 to 95 GHz. The DC power requirement for the amplifier is +8 V_{DC}/300 mA. The use of a heat sink is advised to assist in cooling the device. The RF connectors are male 1 mm connectors. Other port configurations are available under different model numbers.



Features:

- Broadband Operation
- Low Noise and High Gain

Applications:

- Automotive Radar
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		95 GHz
Gain		25 dB	
P _{1dB}		+10 dBm	
P _{sat}		+15 dBm	
Noise Figure		7.0 dB	
P _{in}			0 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	
DC Supply Current		300 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input Port	1 mm (M)
Output Port	1 mm (M)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.3 Oz
Size	1.20" (W) X 1.20" (L) X 0.48" (H)
Outline	BG-SC-2



Broadband Amplifier, 50 to 95 GHz, 25 dB Gain, +10 dBm P_{1dB}, 7 dB NF


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/374 mA

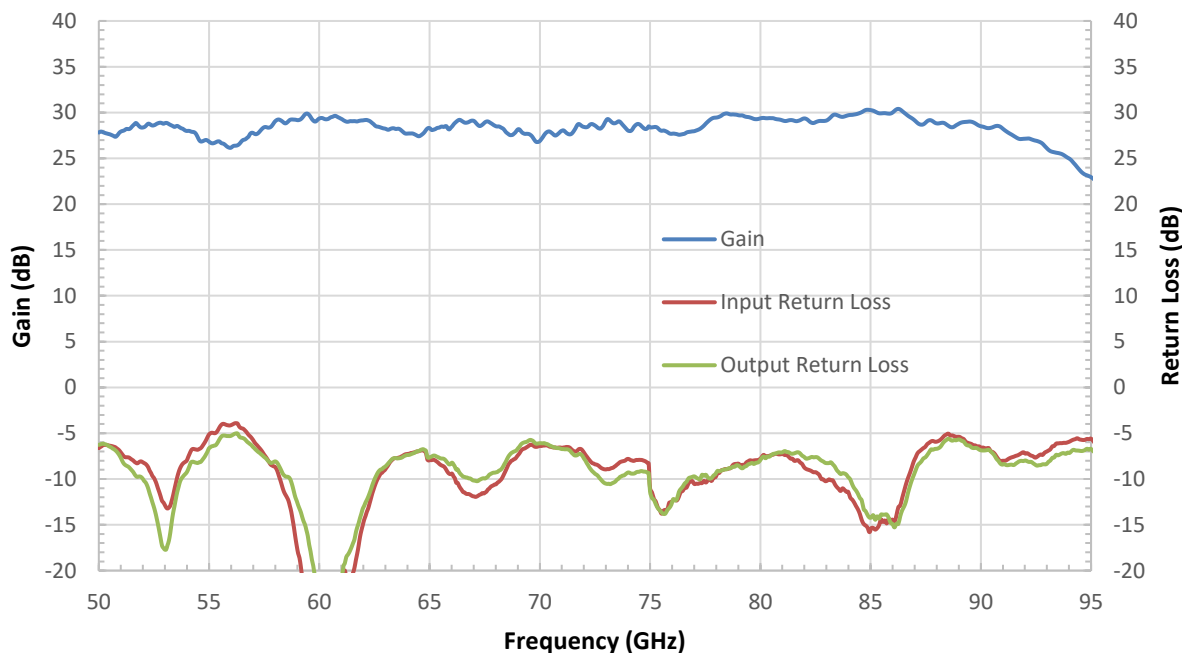

Output Power vs. Frequency


Bias: +8 V_{DC}/374 mA

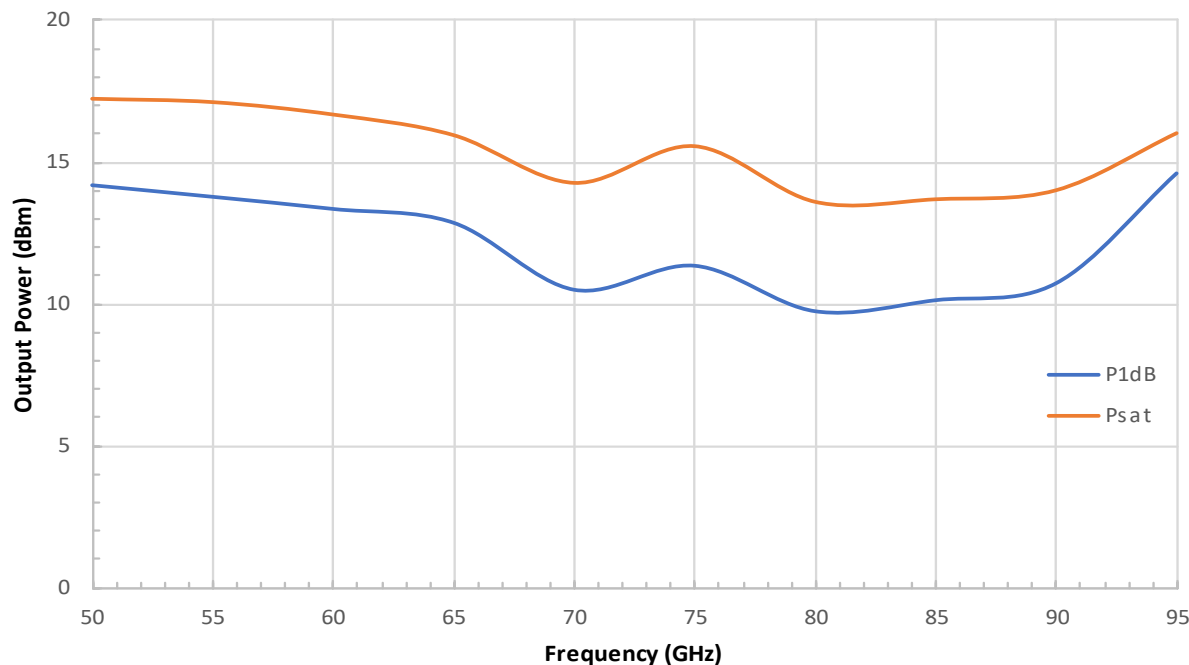


Broadband Amplifier, 50 to 95 GHz, 25 dB Gain, +10 dBm P_{1dB} , 7 dB NF

Noise Figure vs. Frequency

Bias: +8 V_{DC}/374 mA

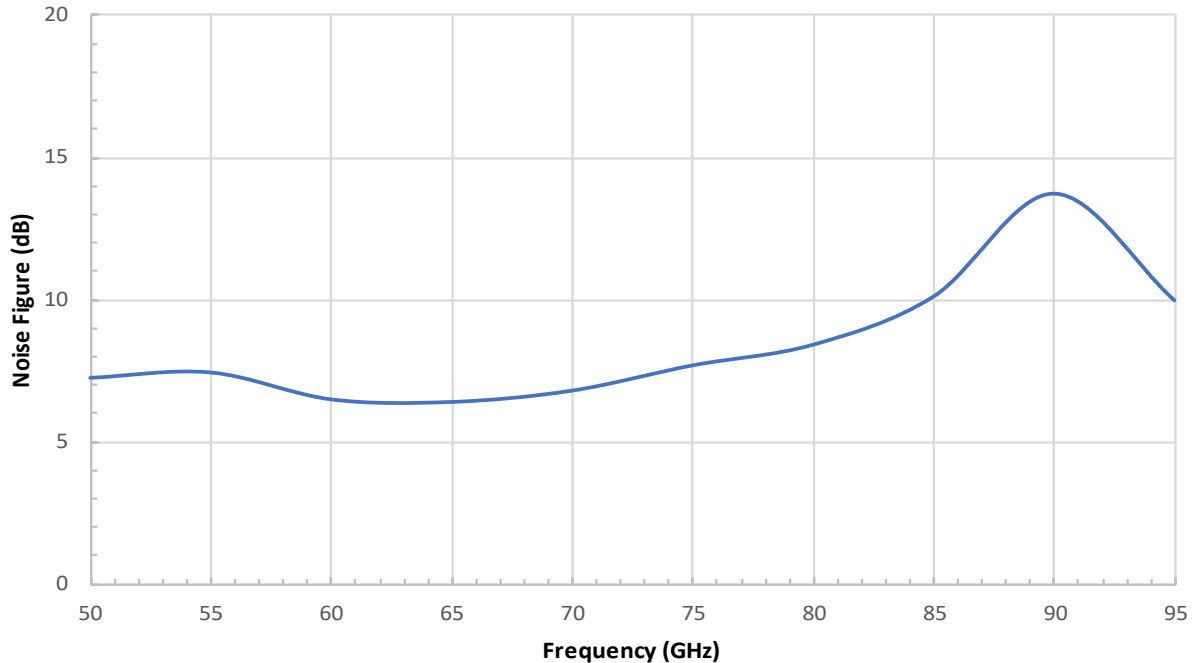

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

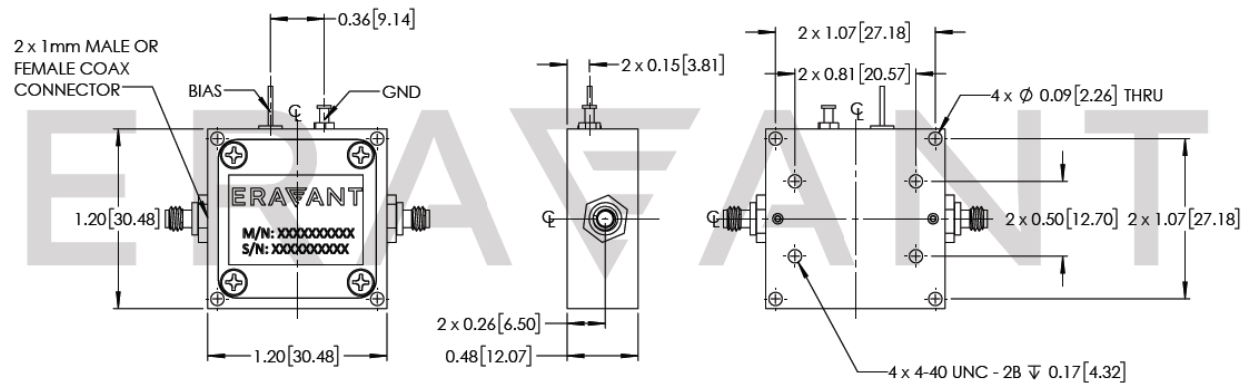

Broadband Amplifier, 50 to 95 GHz, 25 dB Gain, +10 dBm P_{1dB}, 7 dB NF

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-06004-S1, is highly recommended.**

