


Ka-Band Balanced Mixer

Description:

Model SFB-28-N1 is a Ka Band balanced mixer that utilizes high performance GaAs Schottky beam-lead diodes and a balanced circuit configuration to offer superior RF performance. The mixer supports the full waveguide band operation for both LO and RF frequencies from 26.5 to 40 GHz with an IF output from DC to 13.5 GHz. The mixer offers a conversion loss of 7.5 dB typical and a high RF to LO port isolation of 30 dB.

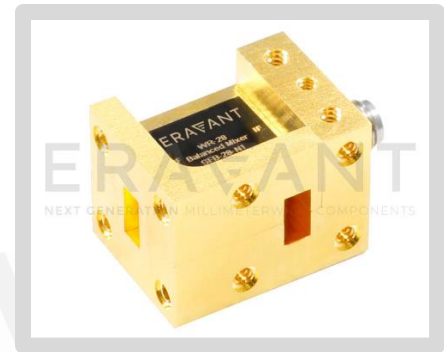

Features:

- Full Waveguide Band Coverage
- Low Conversion Loss
- High IF Frequency up to 13.5 GHz

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	26.5 GHz		40 GHz
LO Frequency	26.5 GHz		40 GHz
IF Frequency	DC		13.5 GHz
LO Pumping Power	+10 dBm	+13 dBm	+18 dBm
RF Input P _{-1dB}		-3 dBm	
Conversion Loss		7.5 dB	10 dB
RF to LO Isolation		30 dB	
Combined RF and LO Power			+20 dBm
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Note: The RF input P_{-1dB} is LO pumping power related. The value shown is at LO power +13 dBm. The higher the LO power, the higher the input P_{-1dB}.

Mechanical Specifications:


Item	Specification
RF Port	WR-28 Waveguide with UG-599/U Flange
LO Port	WR-28 Waveguide with UG-599/U Flange
IF Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.6 Oz
Outline	FB-NA




Ka-Band Balanced Mixer

Typical Conversion Loss vs. Frequency

RF: -20 dBm; LO: +13 dBm

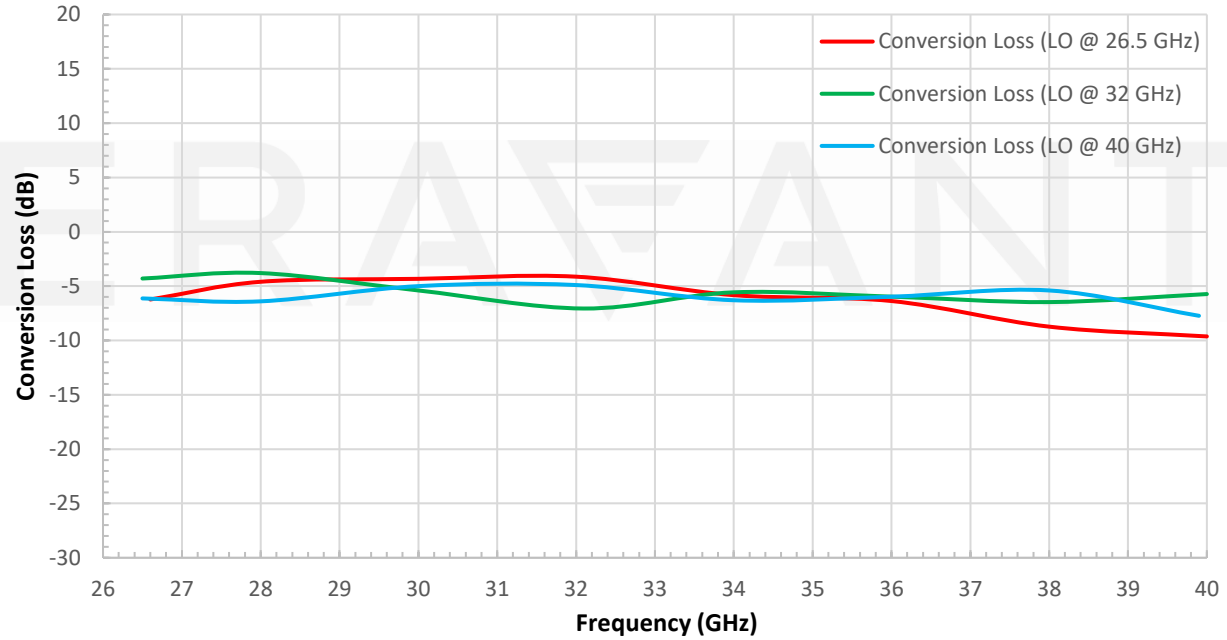

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

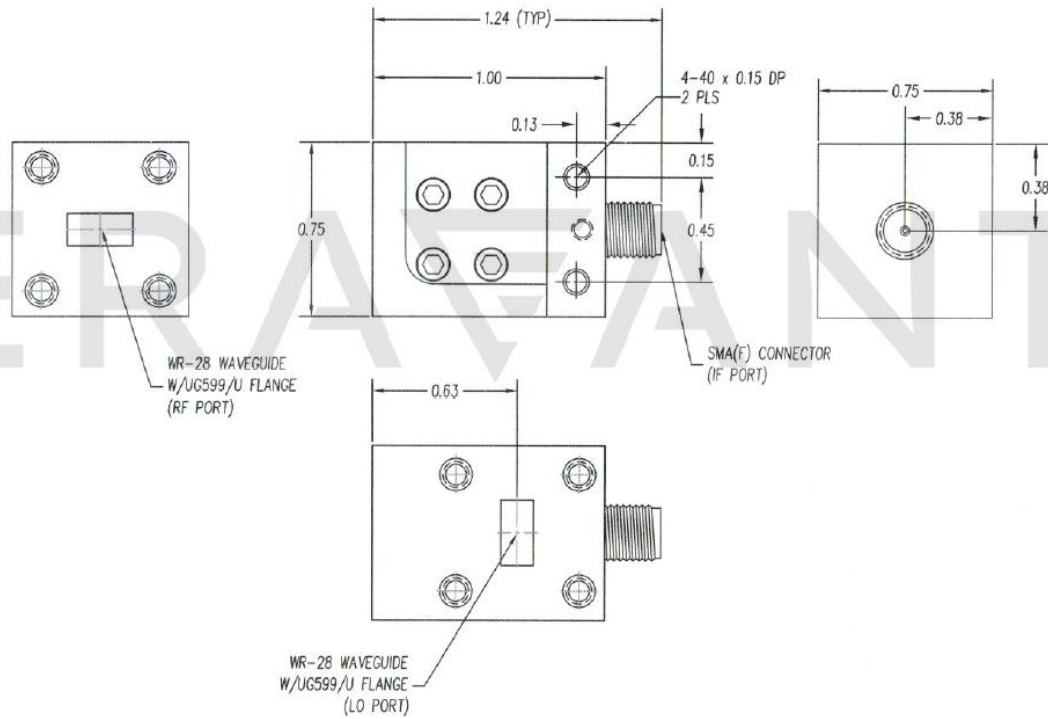

Ka-Band Balanced Mixer

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- A DC block at IF port may be required when connecting to a device, such as an IF low noise amplifier or a base band mixer which input port is DC coupled.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. **Use a DC block when connecting to other devices.**
- **Never apply an external bias voltage to the IF port because the mixer will be damaged.**
- Any foreign objects in the waveguide will cause performance degradation and can possibly damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

ERAVANT

