

## SBL-2042342080-0404-E1

**WR-04 Low Noise Amplifier, 195 to 230 GHz, 20 dB Gain, 8 dB NF**

**SBL-2042342080-0404-E1** is a WR-04 low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 8.0 dB across the frequency range of 195 to 230 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/50 mA. The input and output port configuration offers an inline structure with WR-04 waveguides and UG-387/U-M anti-cocking flanges.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	195 GHz		230 GHz
Gain		20 dB	
Noise Figure		8 dB	
P <sub>1dB</sub>		-5 dBm	
P <sub>in</sub>			10 dBm
Input Return Loss		5 dB	
Output Return Loss		5 dB	
DC Voltage		+8 V <sub>DC</sub>	+12 V <sub>DC</sub>
DC Supply Current		50 mA	
Specification Temperature		+25 °C	
Operation Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input	WR-04 Waveguide with UG-387/U-M Anti-Cocking Flange
Output	WR-04 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 oz
Size	1.40" (L) X 1.00" (W) X 0.75" (H)
Outline	BG-S04-2-A

### ECCN

3A001.b.4

### FEATURES

- State-of-the-Art Noise Figure
- Low Power Consumption

### APPLICATIONS

- Passive Imaging
- 6G Systems


### SUPPLEMENTAL DETAILS



## SBL-2042342080-0404-E1

### Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

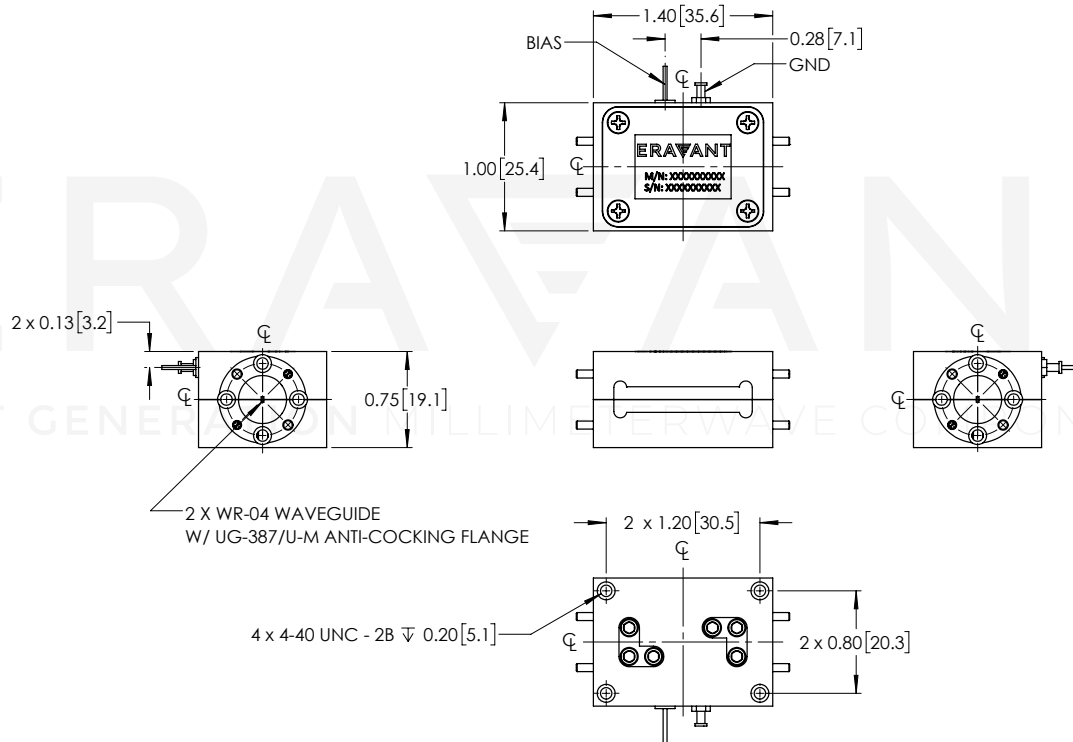

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C case temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the device will cause performance degradation and possible device damage.
- Exceeding absolute maximum ratings shown will damage the device. The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.