



Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF

Description:

Model SBL-2634032030-2828-S1 is a low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 3 dB across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +8 V_{DC}/66 mA. The input and output port configurations are both WR-28 waveguides. Other port configurations, such as K connectors or WR-28 waveguides for either the input or output port, are also available under different model numbers.



Features:

- Full Waveguide Band Operation
- State-of-the-Art Noise Figure
- Good Gain Flatness

Applications:

- 5G Systems
- Radar Systems
- Communication Systems
- Low Noise Receivers

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40.0 GHz
Gain		20 dB	
Noise Figure		3 dB	
P _{1dB}		+8 dBm	
P _{in}			-1 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		66 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	WR-28 Waveguide with UG-599/U Flange
Output Port	WR-28 Waveguide with UG-599/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.9 Oz
Size	1.20" (W) X 2.20" (L) X 0.50" (H)
Outline	BG-SA-1






Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF


Typical Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/66 mA

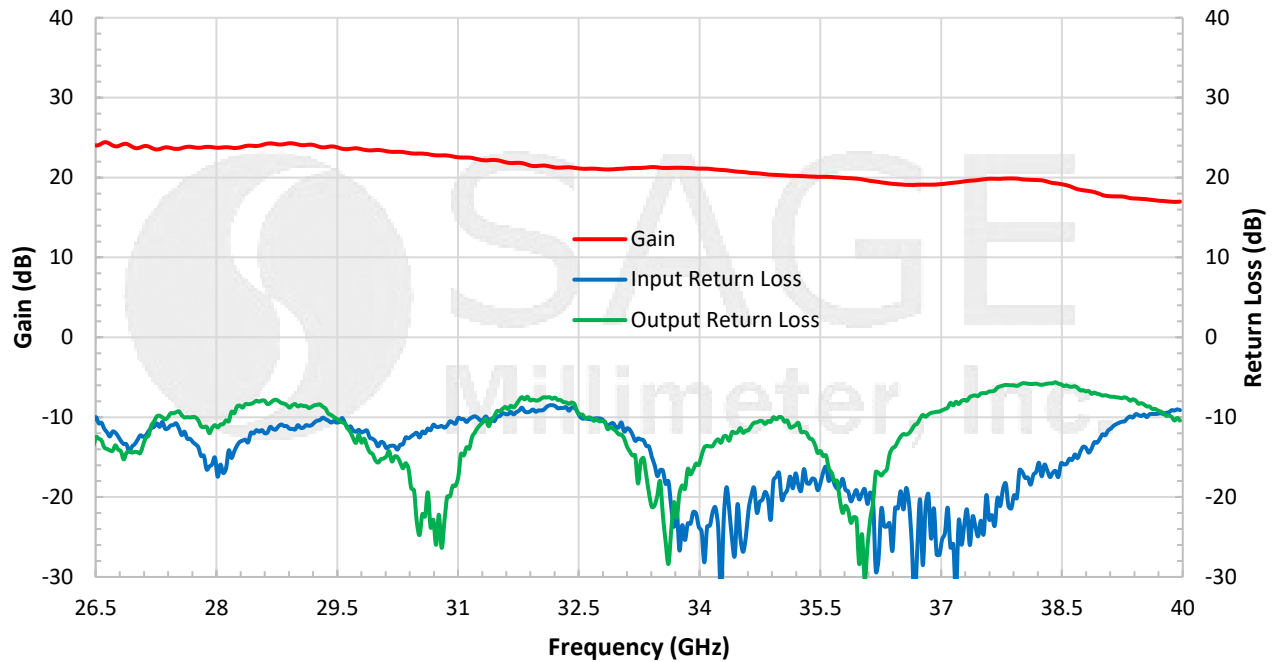

Typical Noise Figure vs. Frequency


Bias: +8 V_{DC}/66 mA

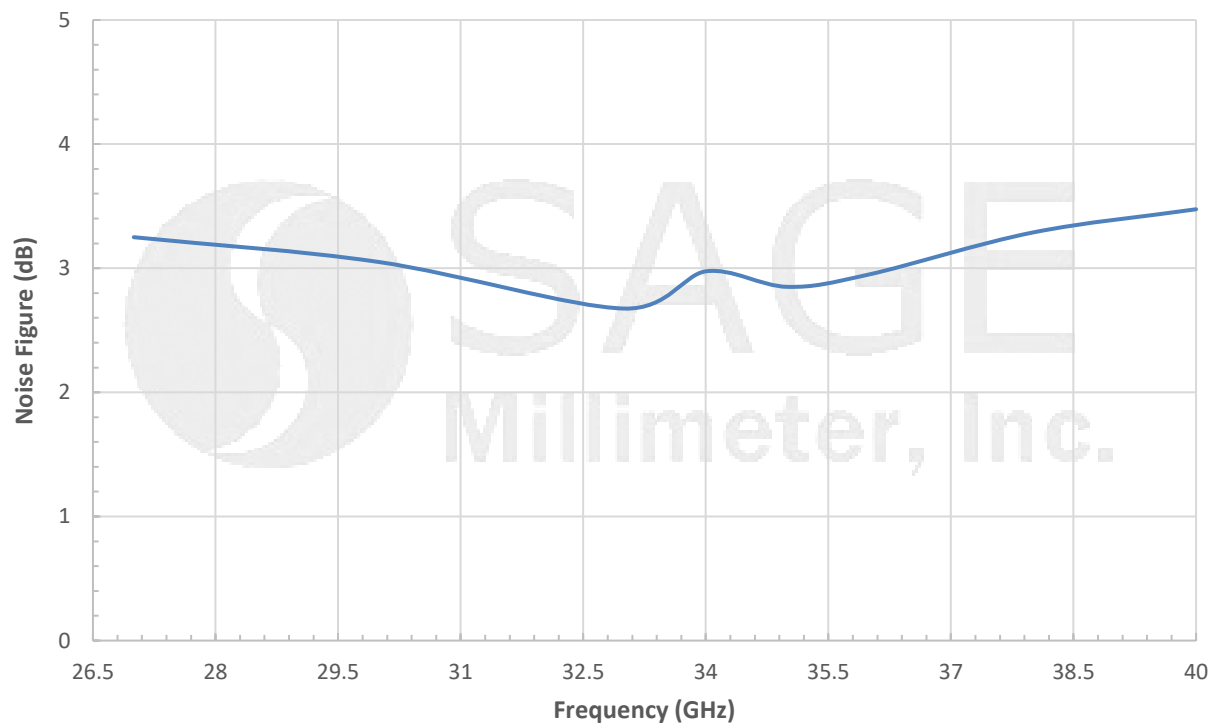



Ka-Band Low Noise Amplifier, 26.5 to 40 GHz, 20 dB Gain, 3 dB NF

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

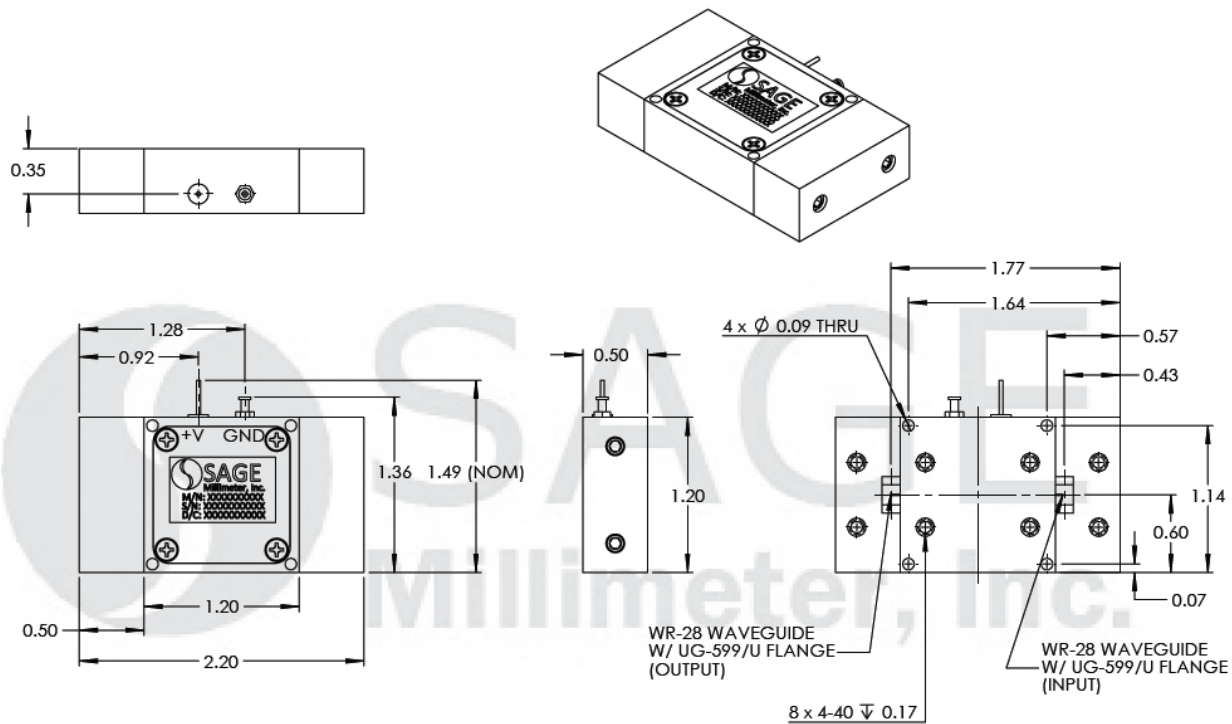

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

