

## SFB-80312409-1010KF-N1-2

### W-Band Balanced Mixer

**SFB-80312409-1010KF-N1-2** is a W-Band balanced mixer that utilizes high performance GaAs Schottky beam-lead diodes and a balanced circuit configuration to offer superior RF performance. The mixer supports the full waveguide band operation for both LO and RF frequencies from 80 to 116 GHz with an extremely broad IF output from DC to 20 GHz. The mixer offers a conversion loss of 9 dB typical and a high RF to LO port isolation of 30 dB. **While the typical LO to IF isolation of the mixer is 10 dB, it can be improved to 40 dB by adding Eravant's SCF-55375330-KFKM-L1 coaxial low pass filter.**



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	80 GHz		116 GHz
LO Frequency	80 GHz		116 GHz
IF Frequency	DC		20 GHz
LO Pumping Power	+12 dBm	+13 dBm	+15 dBm
Conversion Loss		9 dB	11 dB
RF Input P <sub>-1dB</sub>		-3 dBm	
LO to RF Isolation		30 dB	
Combined RF to LO Power			+18 dBm
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

### Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
LO Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
IF Port	K (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Outline	FB-NW-A

### ECCN

EAR99

### FEATURES

- Full Waveguide Band Coverage
- Low Conversion Loss
- High IF Frequency up to 20 GHz
- Compact Package

### APPLICATIONS

- Radar Systems
- Communication Systems
- Test Equipment


### SUPPLEMENTAL DETAILS




SFB-80312409-1010KF-N1-2

Typical Conversion Loss vs. Frequency

RF: -20 dBm; LO: +13 dBm

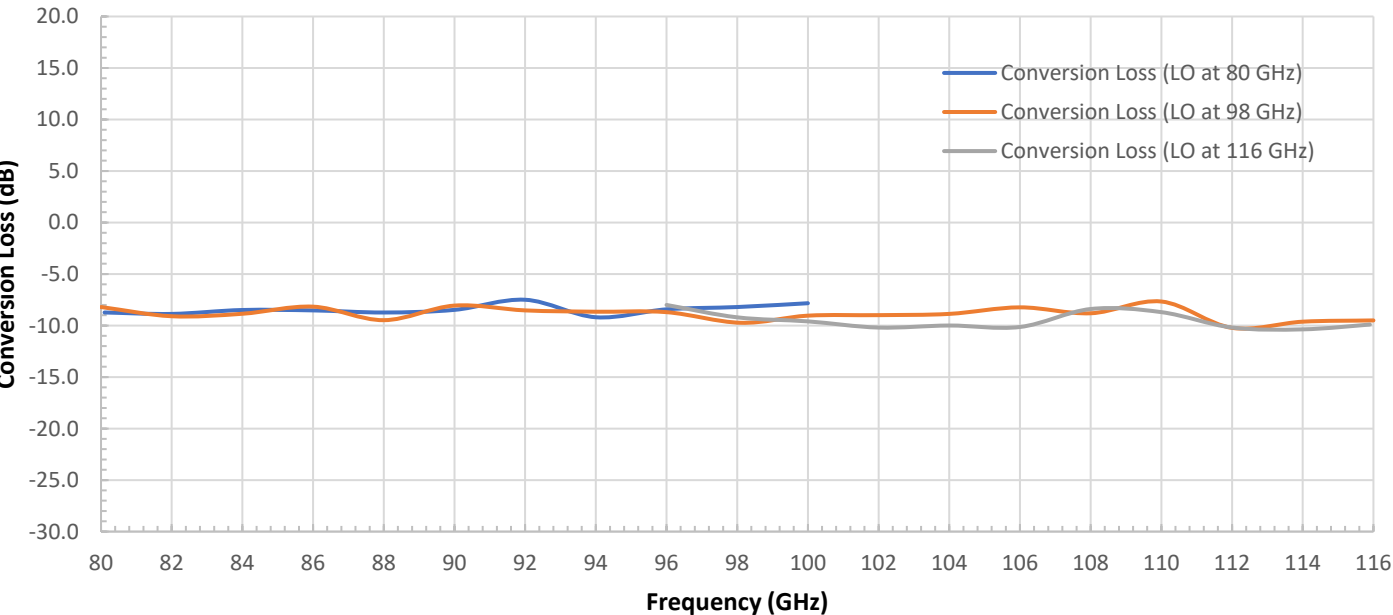

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

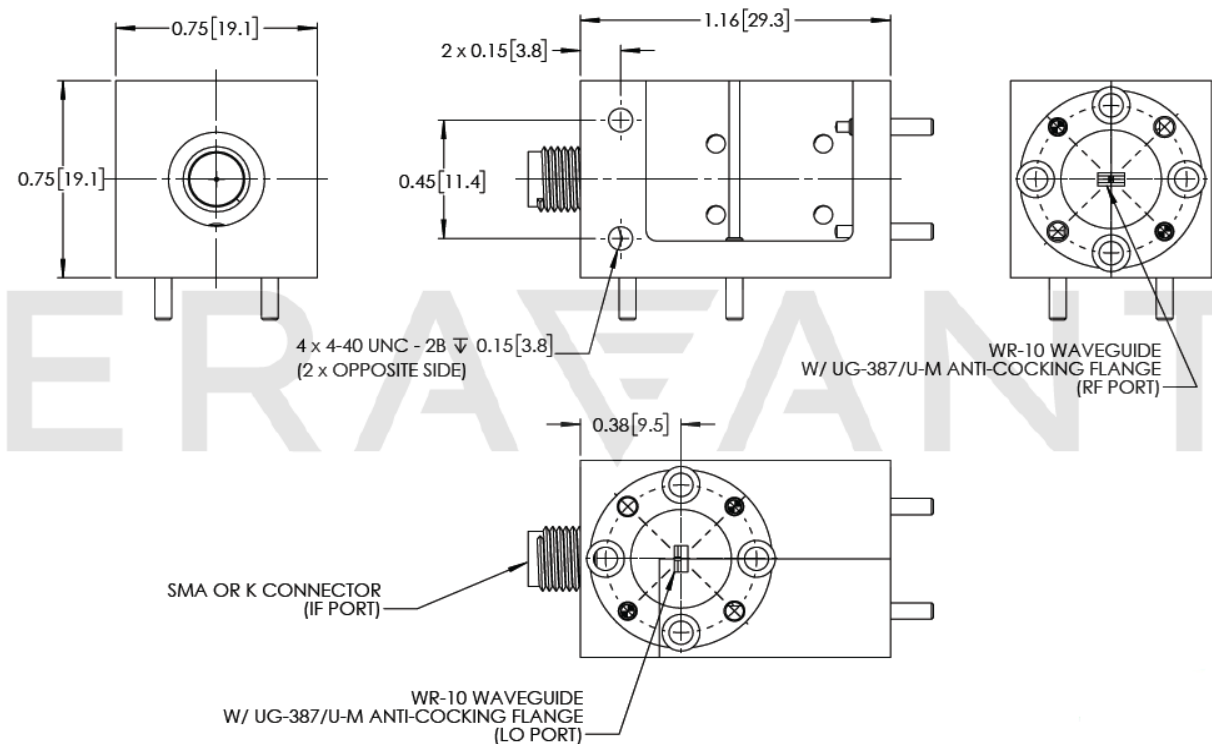

**NOTE:**

- Test data provided is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- A DC block at IF port may be required when connecting to a device, such as an IF low noise amplifier or a base band mixer which input port is DC coupled.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. **Use a DC block when connecting to other devices.**
- **Never apply an external bias voltage to the IF port because the mixer will be damaged.**
- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE