



U Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

Description:

Model SFQ-40360312-1919SF-N1-M is a broadband quadrature mixer that covers the frequency range of 40 to 60 GHz. The typical conversion loss of the quadrature mixer is 11 dB with an LO driving power of +15 dBm. The typical LO to RF port isolation is 30 dB. Since the IF port of the quadrature mixer is DC coupled, the mixer can be used as a phase detector. In addition, the mixer can be readily configured into an image rejection mixer or single sideband modulator by adding an IF quadrature coupler. The mechanical configuration offers an inline structure with WR-19 Uni-Guide™ waveguides. Other port configurations, such as V connectors, are also available under different model number, **SFQ-40360311-VFVFSF-N1-M**.



Features:

- Compact Package
- Low Conversion Loss
- High Port Isolations
- IF Port DC Coupled for Phase Detection

Applications:

- Phase Detection
- Speed and Ranging Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	40 GHz		60 GHz
LO Frequency	40 GHz		60 GHz
LO Pumping Power	+13 dBm	+15 dBm	+18 dBm
IF Frequency	DC		20.0 GHz
Conversion Loss		12 dB	
I/Q Amplitude Unbalance		±1.0 dB	
I/Q Phase Unbalance		±15°	
LO to RF Port Isolation	20 dB	30 dB	
LO to IF Port Isolation		15 dB	
RF to IF Port Isolation		20 dB	
Combined RF & LO Power			+20 dBm
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C






U-Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

Mechanical Specifications:

Item	Specification
RF Port	WR-19 Uni-Guide™ Waveguide with UG-383/U-M Anti-Cocking Flange
LO Port	WR-19 Uni-Guide™ Waveguide with UG-383/U-M Anti-Cocking Flange
IF-I Port	SMA (F)
IF-Q Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	1.12 Oz
Size	1.56" (L) x 1.13" (Φ)
Outline	UH-235-2U2C-A

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

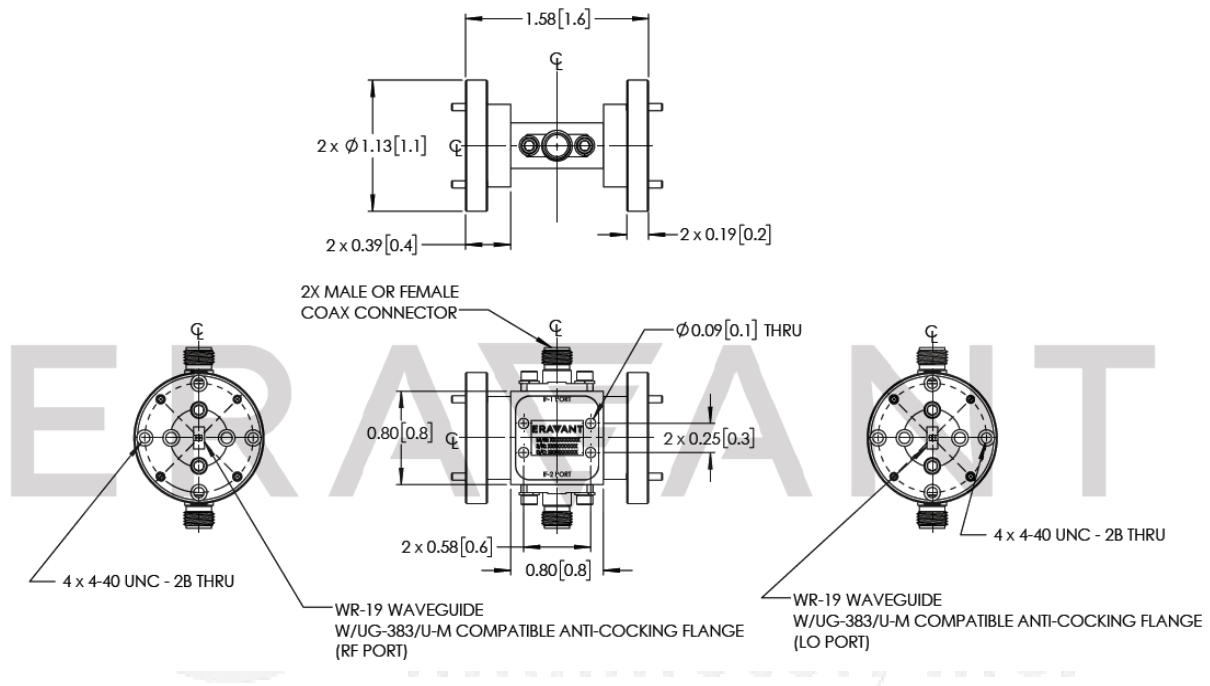



U-Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- The mixer employs SAGE Millimeter's trademarked and patent pending technology, **Uni-Guide™**, as its waveguide interfaces.
- The I/Q mixer can be configured as an image rejection mixer or used as an I/Q up-converter, single sideband modulator and phase detector.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the device.
- The IF ports are DC coupled. Use DC blocks if necessary. **Do not apply an external bias voltage to the IF port.**
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

