



## E-Band Low Noise Amplifier, 40 dB Gain, 5.0 dB NF

### Description:

**Model SBL-6039034050-1212-S1** is a low noise amplifier with a typical small signal gain of 40 dB and a nominal noise figure of 5 dB across the frequency range of 60 to 90 GHz. The DC power requirement for the amplifier is +8 V<sub>DC</sub>/150 mA. The mechanical configuration offers a right angle structure with WR-12 waveguides and UG-387/U anti-cocking flanges. Other port configurations, such as with 1 mm connectors or an inline structure with WR-12 waveguides, are also available under different model numbers.



### Features:

- Full Waveguide Band Performance
- State-of-the-Art Noise Figure
- High Gain

### Applications:

- Radar Systems
- Communication Systems
- Low Noise Receivers

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	60 GHz		90 GHz
Gain		40 dB	
Noise Figure		5 dB	
P <sub>1dB</sub>		+10 dBm	
P <sub>in</sub>			-20 dBm
Input Return Loss		8 dB	
Output Return Loss		8 dB	
DC Voltage	+6 V <sub>DC</sub>	+8 V <sub>DC</sub>	+15 V <sub>DC</sub>
DC Supply Current		150 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

### Mechanical Specifications:

Item	Specification
Input Port	WR-12 Waveguide with UG-387/U Flange
Output Port	WR-12 Waveguide with UG-387/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finishing	Gold Plated
Weight	1.3 Oz
Size	1.10" (W) X 1.70" (L) X 0.50" (H)
Outline	BG-SE-1






## E-Band Low Noise Amplifier, 40 dB Gain, 5.0 dB NF


### Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/198 mA

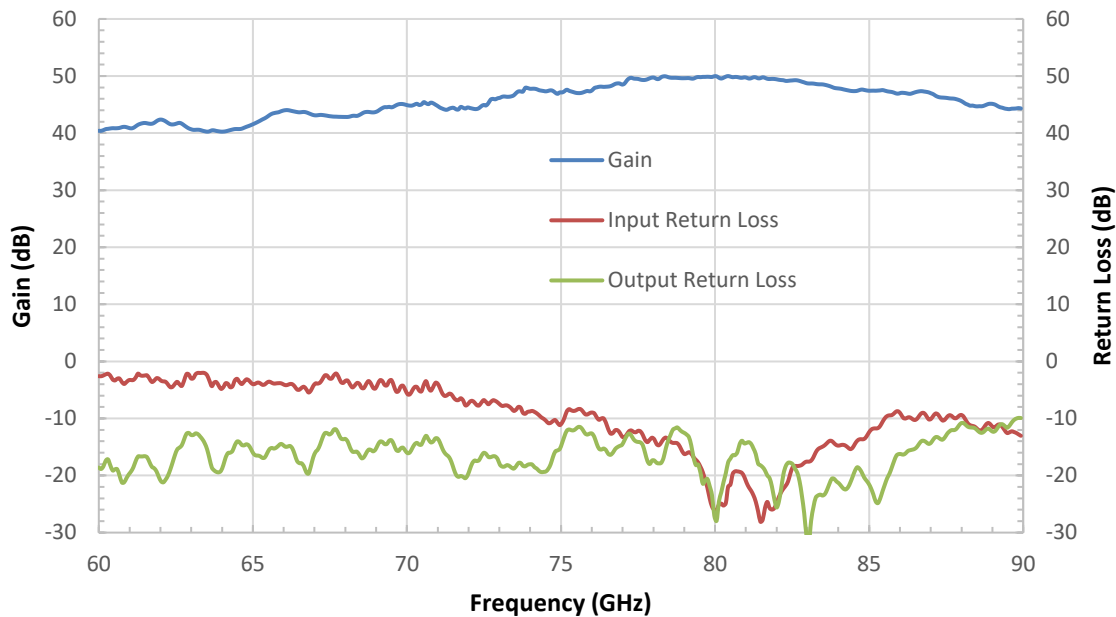

### Typical Noise Figure vs. Frequency

Bias: +8 V<sub>DC</sub>/198 mA

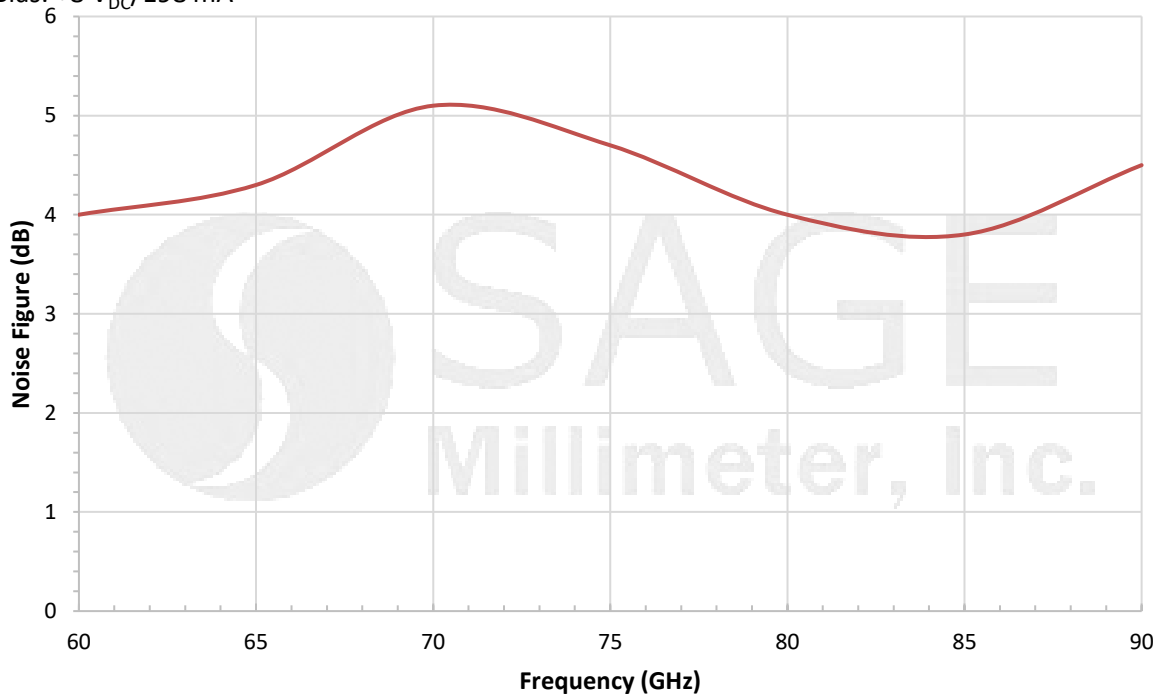





## E-Band Low Noise Amplifier, 40 dB Gain, 5.0 dB NF

### Typical P1dB vs. Frequency

Bias: +8 V<sub>DC</sub>/198 mA

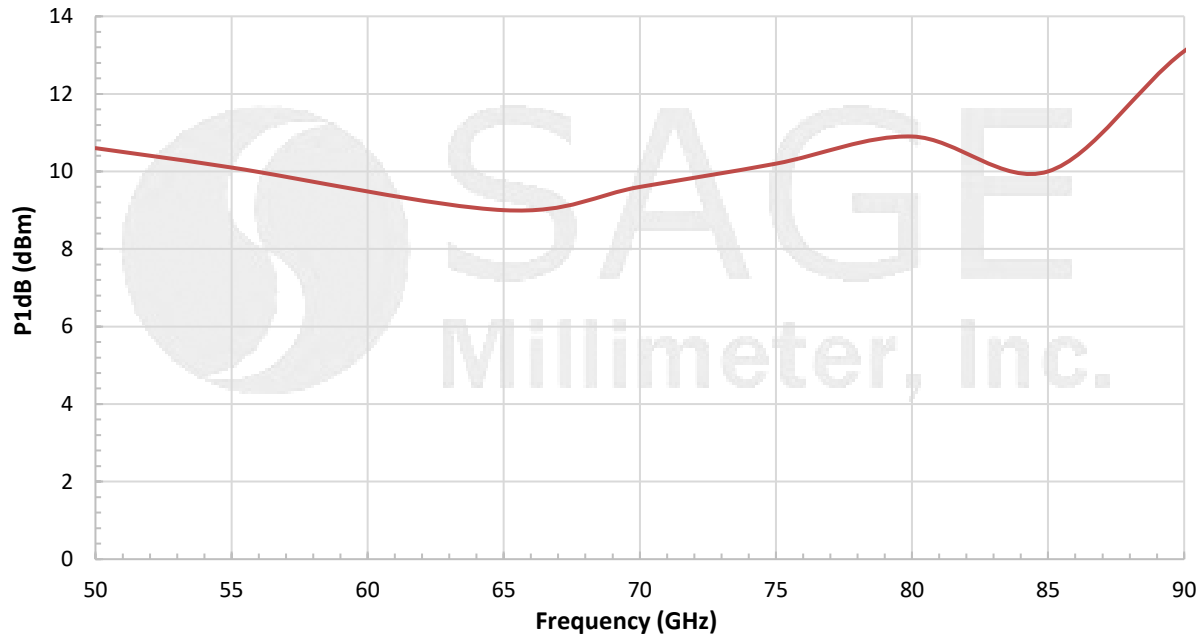

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

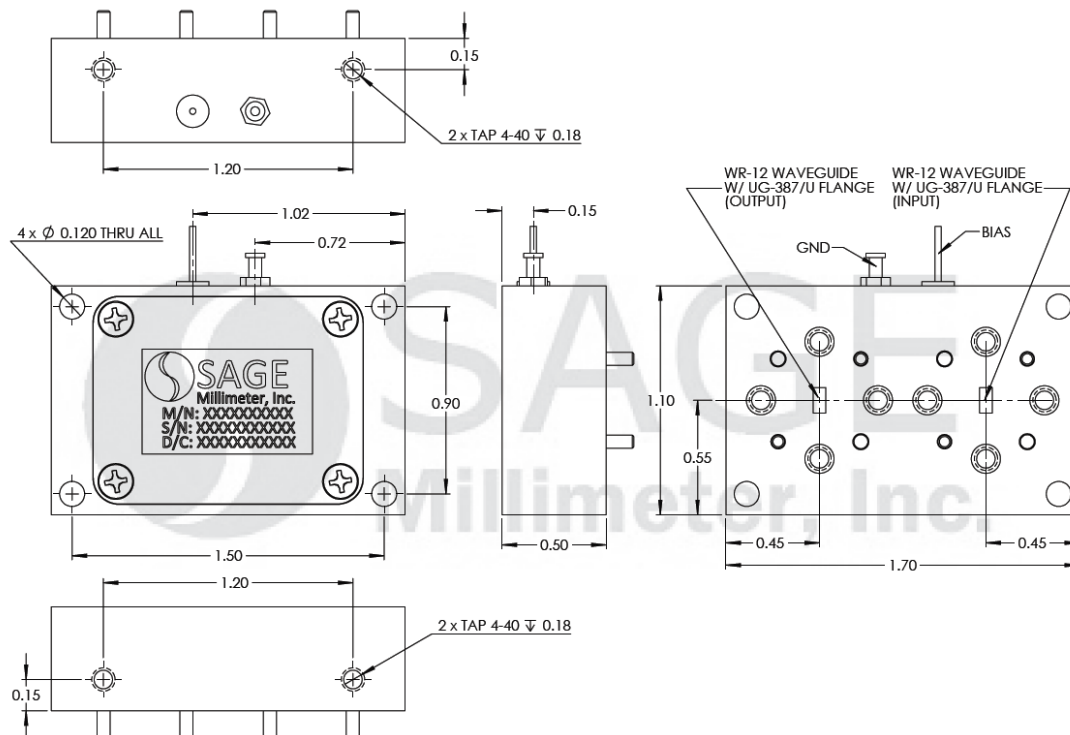



## E-Band Low Noise Amplifier, 40 dB Gain, 5.0 dB NF

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

