


V-Band Quadrature Mixer or Phase Detector, 50 to 75 GHz

Description:

Model SFQ-50375313-1515SF-N1-M is an V Band quadrature mixer that covers the frequency range of 50 to 75 GHz. The typical conversion loss of the quadrature mixer is 13 dB with an LO driving power of +15 dBm. The typical LO to RF port isolation is 30 dB. Since the IF port of the quadrature mixer is DC coupled, the mixer can be used as a phase detector. In addition, the mixer can be readily configured into an image rejection mixer or single sideband modulator by adding an IF quadrature coupler.

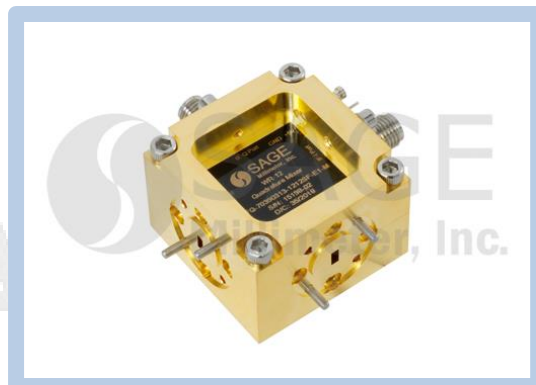

Features:

- Compact Package
- Low Conversion Loss
- High Port Isolations
- IF Port DC Coupled for Phase Detection

Applications:

- IEEE 802.11.ad WiGig Systems
- Phase Detection
- Speed and Ranging Radar Systems
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency Range	50 GHz		75 GHz
LO Frequency Range	50 GHz		75 GHz
RF Input P _{-1dB}		0 dBm	
LO Pumping Power		+15 dBm	+20 dBm
IF Frequency Range	DC		20 GHz
Conversion Loss		13 dB	
I/Q Phase Unbalance		±15°	
I/Q Amplitude Unbalance		±1.0 dB	
LO to RF Port Isolations	20 dB	30 dB	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C


Mechanical Specifications:

Item	Specification
RF & LO Ports	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
IF-I & IF-Q Ports	SMA(F) & SMA (F)
DC Bias Port	N/C
Case Material	Aluminum
Finish	Gold Plated
Weight	1.8 Oz
Size	1.25" (L) X 1.25" (W) X 0.88" (H)
Outline	FQ-VEM-A



V-Band Quadrature Mixer or Phase Detector, 50 to 75 GHz

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

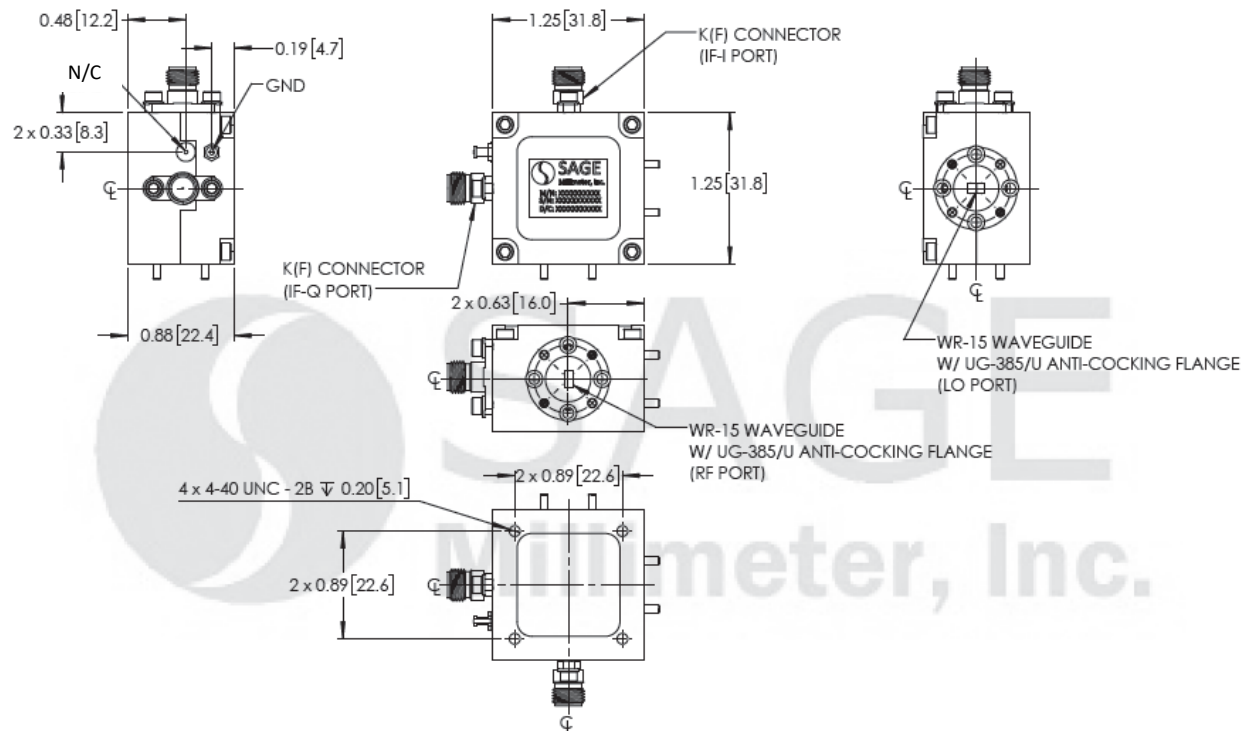

Note:

- The I/Q mixer can be configured as an image rejection mixer or used as an I/Q up-converter, single sideband modulator and phase detector.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings will damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the device.
- The IF ports are DC coupled. Use DC blocks if necessary. **Do not apply an external bias voltage to the IF port.**
- Proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.