



E-Band Low Noise Amplifier, 75 to 90 GHz, 25 dB Gain, 5 dB NF

Description:

Model SBL-7539032540-1212-S1 is a E band low noise amplifier with a typical small signal gain of 25 dB and a nominal noise figure of 5 dB across the frequency range of 75 to 90 GHz. The DC power requirement for the amplifier is +8 V_{DC}/30 mA. The mechanical configuration offers a right angle structure with WR-12 waveguides and UG-387/U flanges. Other port configurations, such as an in line structure with WR-12 waveguides or 1 mm connectors, are also available under different model numbers.



Features:

- State-of-the-Art Noise Figure
- Broadband Performance
- Low Power Consumption

Applications:

- Low Noise Receivers
- Radar Systems
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	75 GHz		90 GHz
Gain		25 dB	
Noise Figure (79 – 90 GHz)		5 dB	
P _{in}			-20 dBm
Output P _{1dB}		+2 dBm	
Input Return Loss		6 dB	
Output Return Loss		6 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+12 V _{DC}
DC Supply Current		30 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input	WR-12 Waveguide with UG-387/U Flange
Output	WR-12 Waveguide with UG-387/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finishing	Gold Plated
Weight	1.3 Oz
Size	1.10" (W) X 1.70" (L) X 0.50" (H)
Outline	BG-SE-1






E-Band Low Noise Amplifier, 75 to 90 GHz, 25 dB Gain, 5 dB NF


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/30 mA

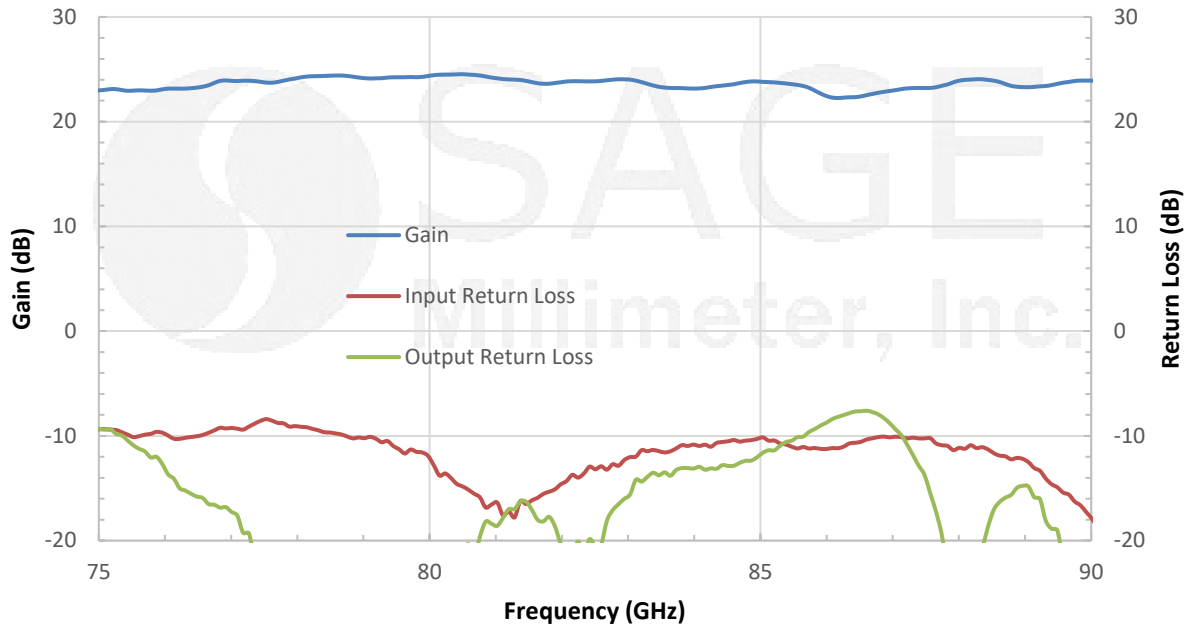

Noise Figure vs. Frequency


Bias: +8V_{DC}/30 mA

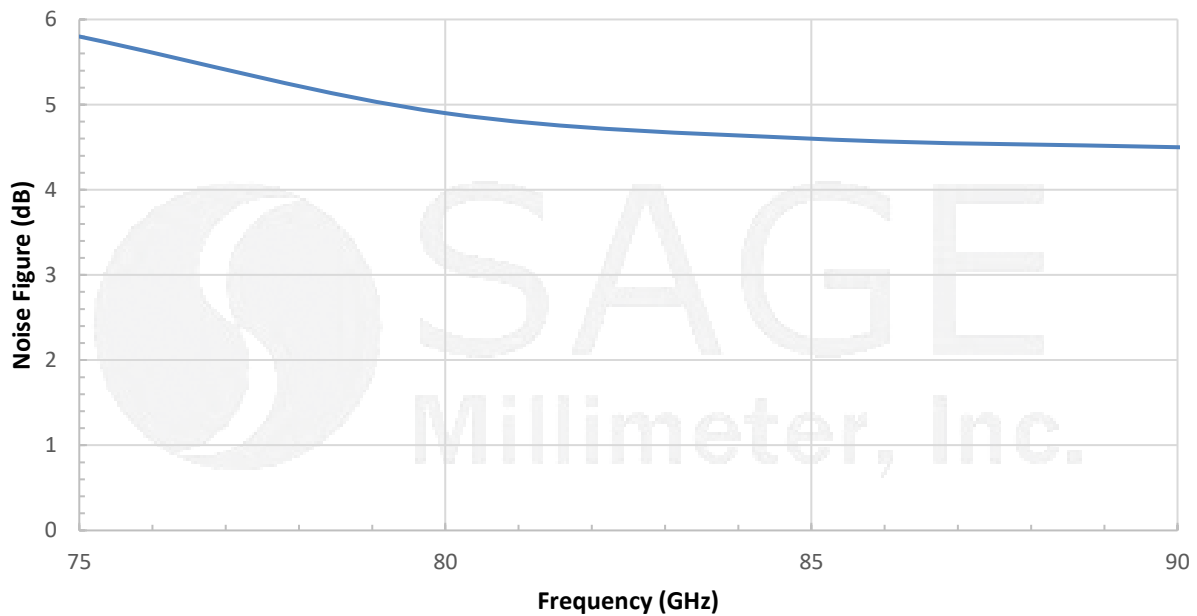



E-Band Low Noise Amplifier, 75 to 90 GHz, 25 dB Gain, 5 dB NF

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

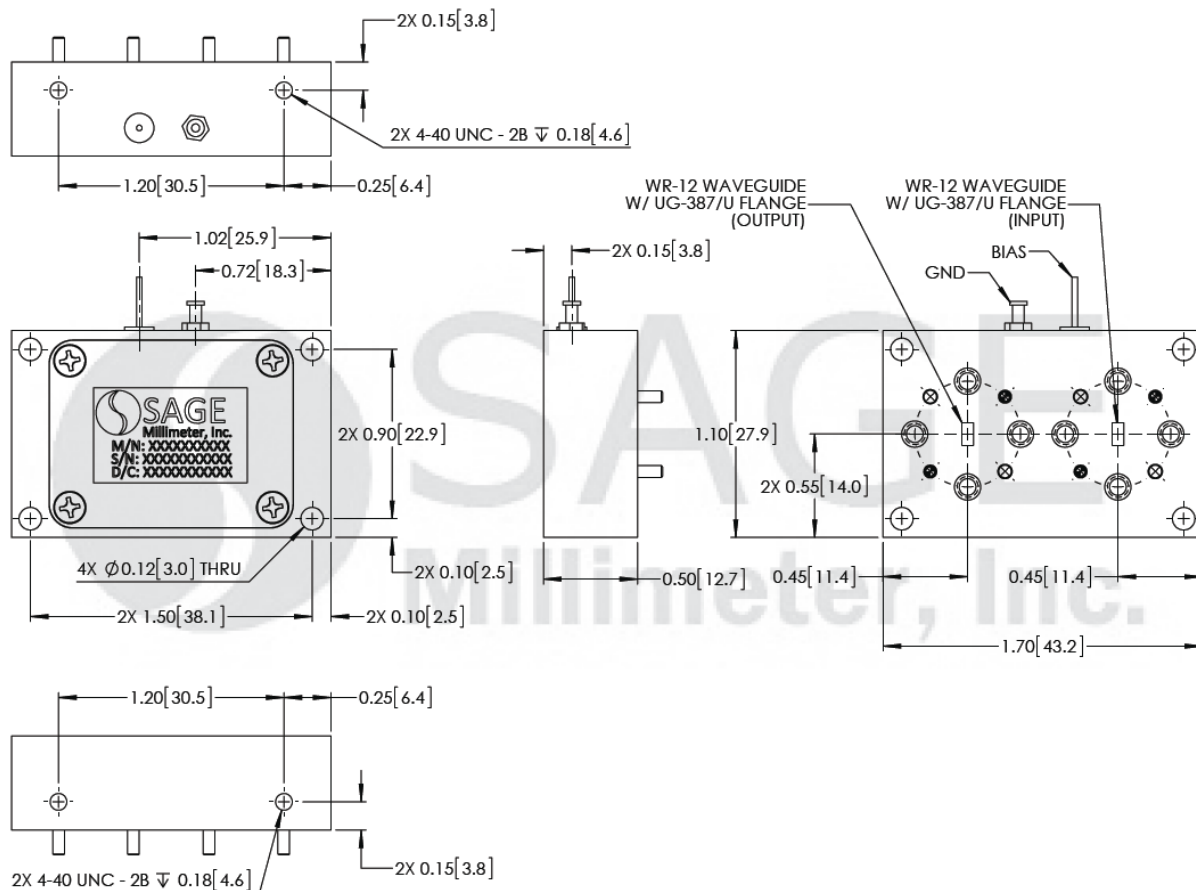

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

