

D-Band Power Amplifier, 110 to 150 GHz, 13 dB Gain, 10 dBm P1

Description:

Model SBP-1141541310-0606-E1 is a D-band power amplifier with a typical small signal gain of 13 dB and a nominal P1dB of 10 dBm across the frequency range of 110 to 150 GHz. The DC power requirement for the amplifier is +8 V_{DC}/200 mA. The input and output port configuration offers an inline structure with WR-06 waveguides and UG-387/U-M anti-cocking flanges. Other port configurations are available under different model numbers.



Features:

- Low Power Consumption

Applications:

- D-Band Passive Imaging
- Communication Systems
- Radar Systems



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	110 GHz		150 GHz
Gain		13 dB	
P _{1dB}		+10 dBm	
P _{sat}		+13 dBm	
P _{in}			10 dBm
Input Return Loss		6 dB	
Output Return Loss		8 dB	
DC Voltage	+6 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Supply Current		200 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:


Item	Specification
Input	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Output	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.6 Oz
Size	1.40" (L) X 1.00" (W) X 0.75" (H)
Outline	BG-SD-2-A

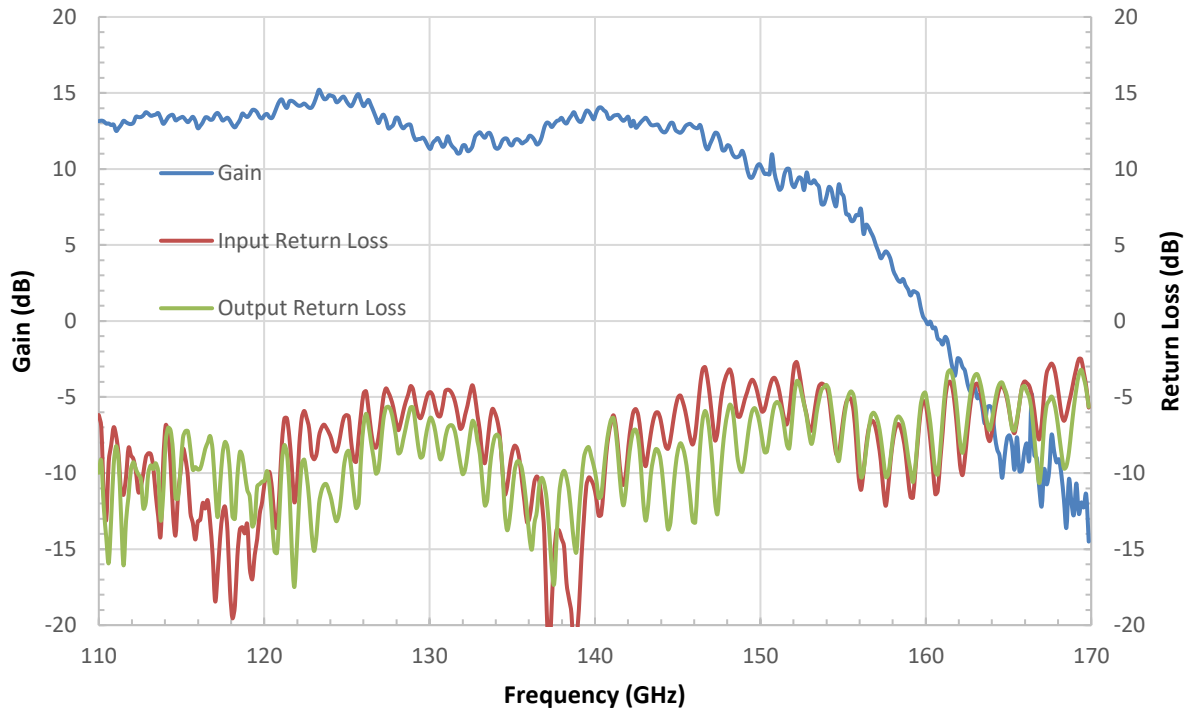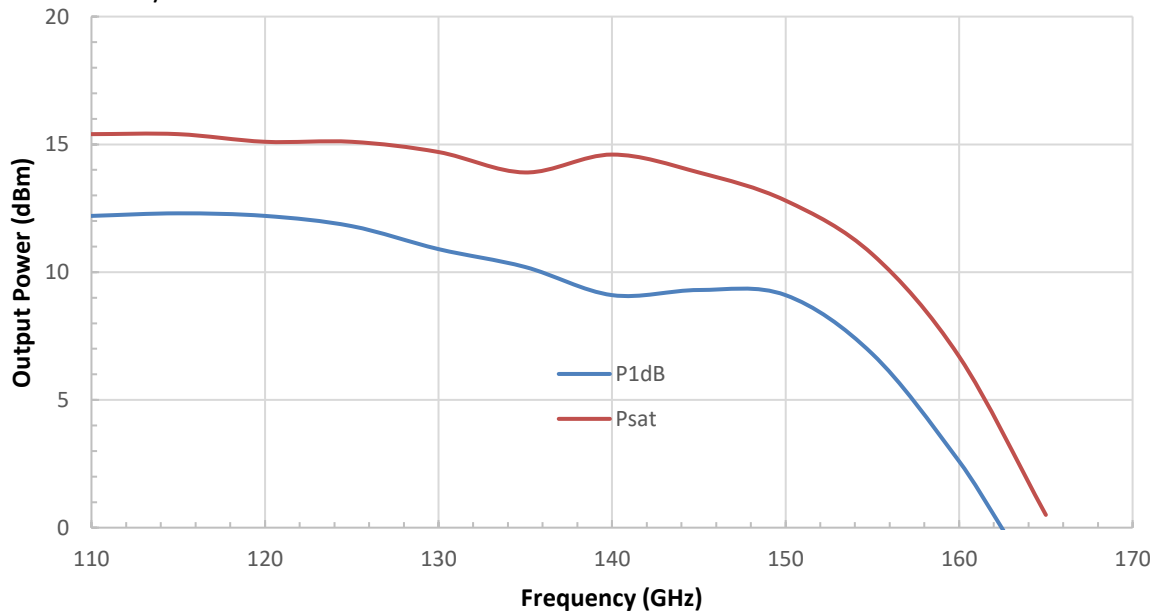

**D-Band Power Amplifier, 110 to 150 GHz, 13 dB Gain, 10 dBm P1****Gain and Return Loss vs. Frequency**Bias: +8 V_{DC}/199 mA**Output Power vs. Frequency**Bias: +8 V_{DC}/199 mARFsat: +8 V_{DC}/ 206 mA

D-Band Power Amplifier, 110 to 150 GHz, 13 dB Gain, 10 dBm P1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

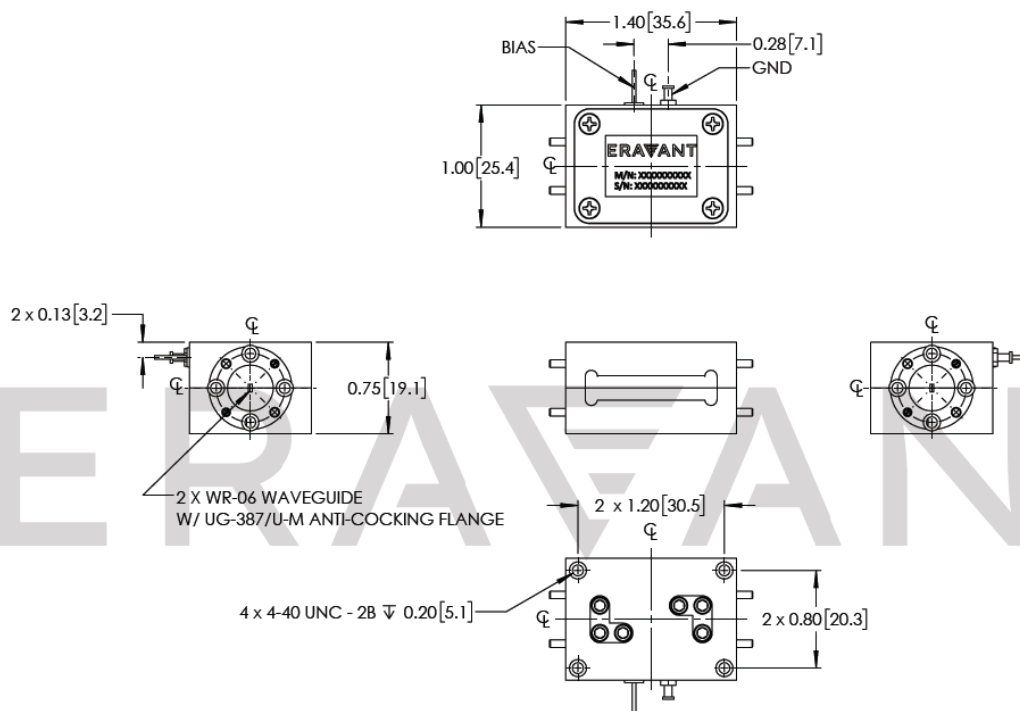

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.