

F-Band Subharmonically Pumped Mixer, 90 to 140 GHz

SFS-08-UEB is a F-Band subharmonically pumped mixer. The mixer is designed with high performance GaAs Schottky diodes and accepts an LO frequency at half the RF frequency to cover the frequency range from 90 to 140 GHz. With a low LO frequency range of 45 to 70 GHz, this mixer is well suited for low-cost F-band system solutions due to local oscillator frequency requirement. The mixer provides 20 dB 2LO to RF isolation, and 20 dB LO to IF isolation typically. The subharmonically pumped mixers in other frequency bands are offered under various model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	90 GHz		140 GHz
LO Frequency	45 GHz		70 GHz
IF Frequency	DC		5 GHz
LO Pumping Power	+8 dBm		+10 dBm
Conversion Loss		15 dB	
LO to IF Isolation		20 dB	
2LO to RF Isolation		20 dB	
Combined RF and LO Power			+10 dBm
Specification Temperature		+25°C	
Operating Temperature	+0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
LO Port	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
IF Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Size	0.75" (W) x 0.75" (L) x 0.75" (H)
Outline	FS-FV-A

ECCN

EAR99

FEATURES

- Low LO Power Requirement
- Subharmonic Mixing
- Compact Package

APPLICATIONS

- THz
- Test Equipment


SUPPLEMENTAL DETAILS



SFS-08-UEB


Conversion Loss vs. Frequency

LO: 10 dBm; IF: 100 MHz

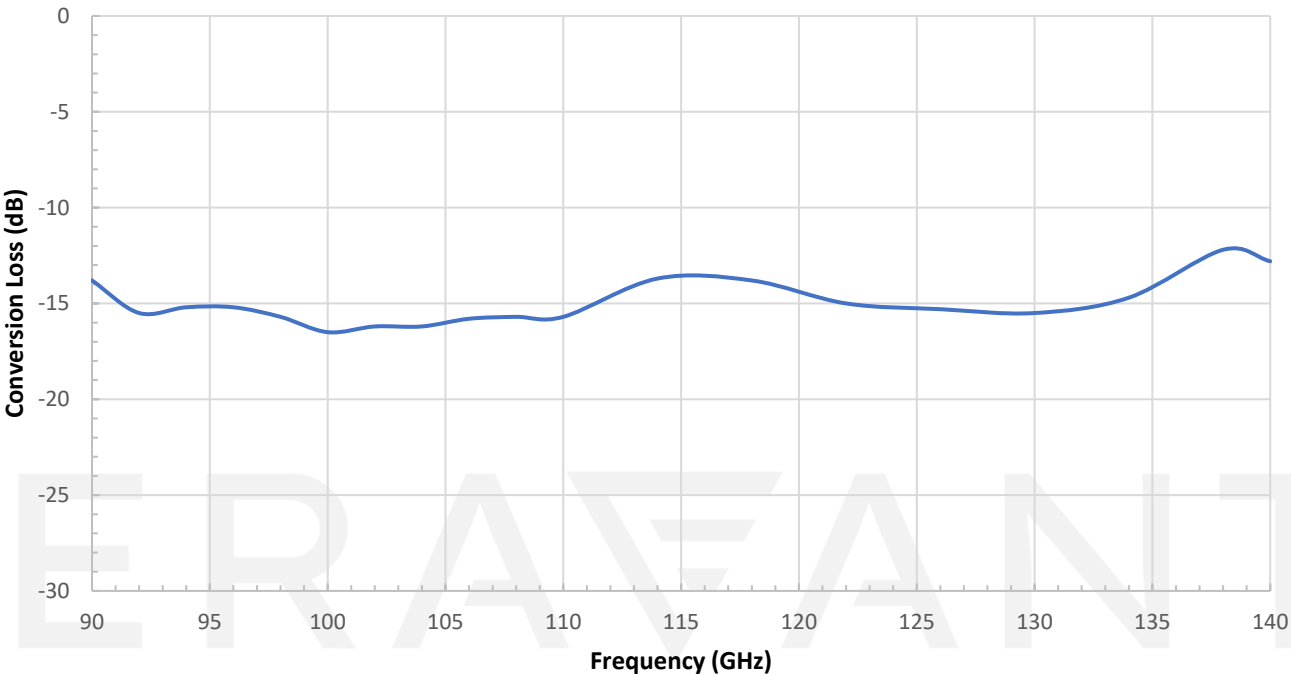

MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

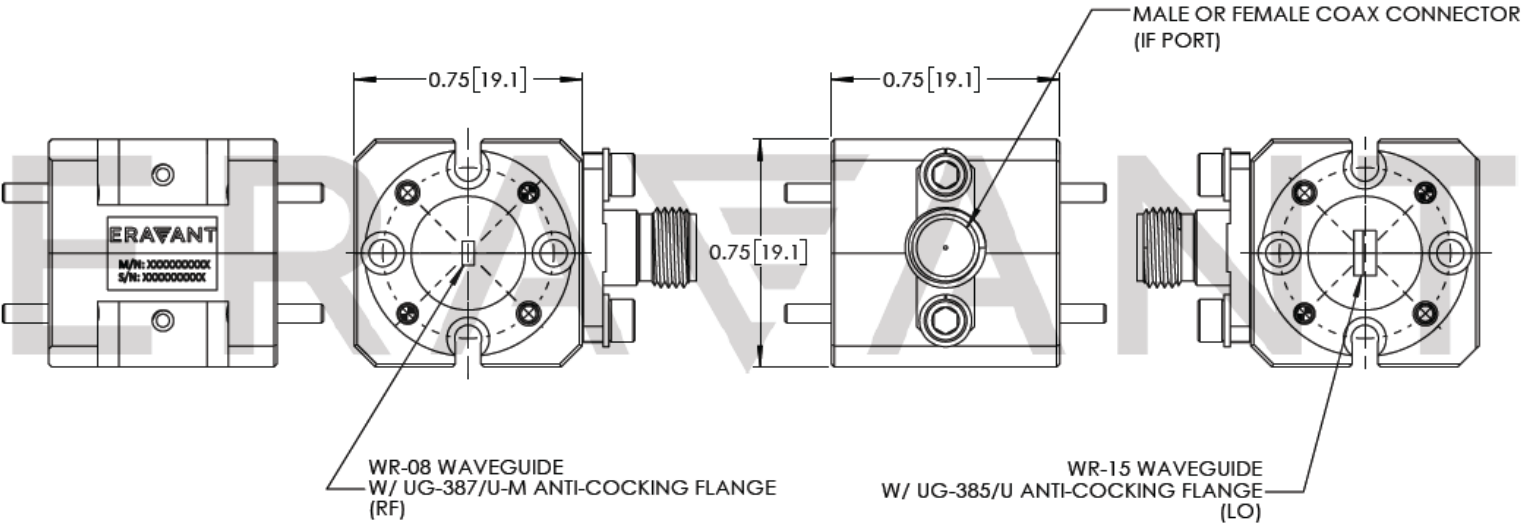

NOTE:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25oC case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. Use a DC block when connecting to other devices. **Any external bias voltage applied to the IF port will damage the mixer. Eravant model, SCB-050-KFKM-U2, is highly recommended.**
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. Torque wrench, model SCH-08008-S1, is highly recommended.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE