

18 to 44 GHz Power Amplifier, 35 dB Gain, +30 dBm P_{1dB}

Description:

Model SBP-1834433530-KFKF-S1-HR is a power amplifier with a typical small signal gain of 35 dB and a nominal P_{1dB} of +30 dBm across the frequency range of 18 to 44 GHz. The DC power requirement for the amplifier is +8 V_{DC}/4.0 A. The RF connectors are female K connectors. Other port configurations, such as K connectors and WR-28 waveguides for either the input or output port, are also available under different model numbers.



Features:

- Broadband Performance
- High Output Power
- Good Power and Gain Flatness

Applications:

- 5G System
- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		44 GHz
Gain		35 dB	
P _{1dB}		+30 dBm	
P _{sat}		+32 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	+12 V _{DC}
DC Supply Current (Under RF Drive)		4.0 A	
Supply Voltage to Fan		+12 V _{DC}	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:


Item	Specification
Input	K(F)
Output	K(F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	17 Oz
Size	3.15" (L) X 3.15" (W) X 3.48" (H)
Outline	BK-SC-C1-H



18 to 44 GHz Power Amplifier, 35 dB Gain, +30 dBm P_{1dB}


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/2.8 A

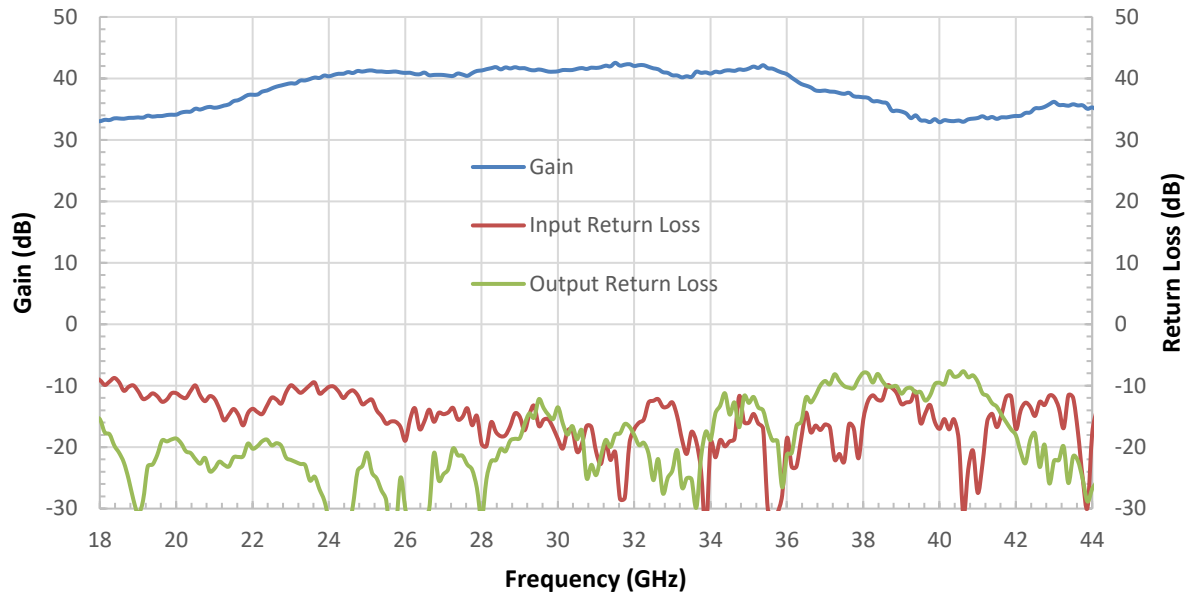


Output Power vs. Frequency

Bias: +8 V_{DC}/4.5 A

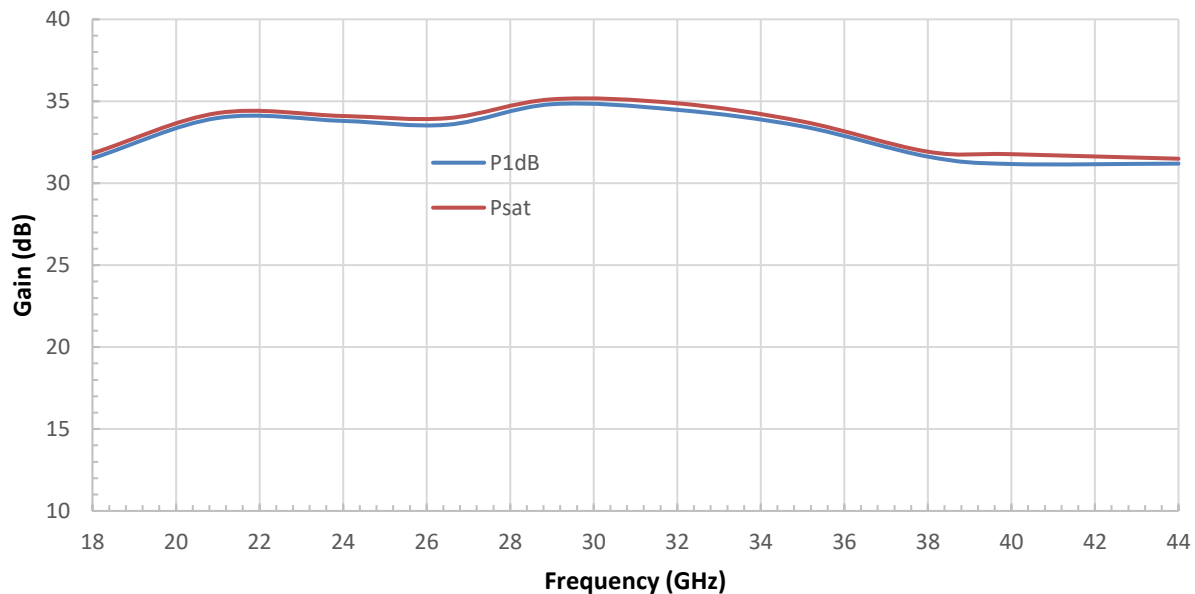

18 to 44 GHz Power Amplifier, 35 dB Gain, +30 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

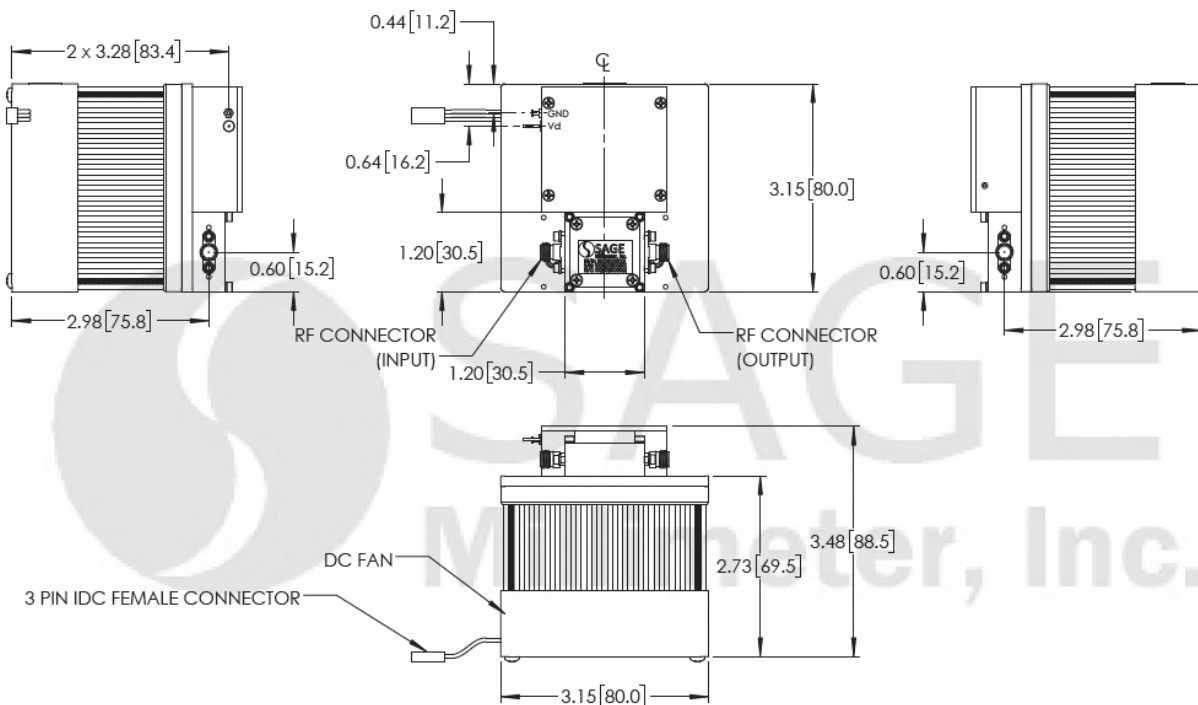

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

