



K-Band Power Amplifier, 23 to 26 GHz, 35 dB Gain, +33 dBm P_{1dB}

Description:

Model SBP-2332633533-2FKF-E1-HR is a power amplifier with a typical small signal gain of 35 dB and a nominal P_{1dB} of +33 dBm across the frequency range of 23 to 26 GHz and comes with heatsink attached. The DC power requirement for the amplifier is +8 V_{DC}/3.5 A. The RF connectors are female 2.4 mm for input and 2.92 mm (K) for output. Other port configurations, such as 2.4 mm or K male connectors are also available under different model numbers.



Features:

- Regulator and Heatsink Attached
- High Output Power
- Extreme Gain Flatness

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	23 GHz		26 GHz
Gain		35 dB	
P _{1dB}		+33 dBm	
P _{sat}		+34 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+7.5 V _{DC}	+8.0 V _{DC}	+12.0 V _{DC}
DC Supply Current		3.5 A	
Supply Voltage to Fan		+12.0 V _{DC}	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	2.4 mm Female
Output Port	2.92 mm (K) Female
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.07 lb
Size	3.15" (W) X 3.15" (L) X 3.48" (H)
Outline	BK-SC-C1-H






K-Band Power Amplifier, 23 to 26 GHz, 35 dB Gain, +33 dBm P_{1dB}


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/3.2 A

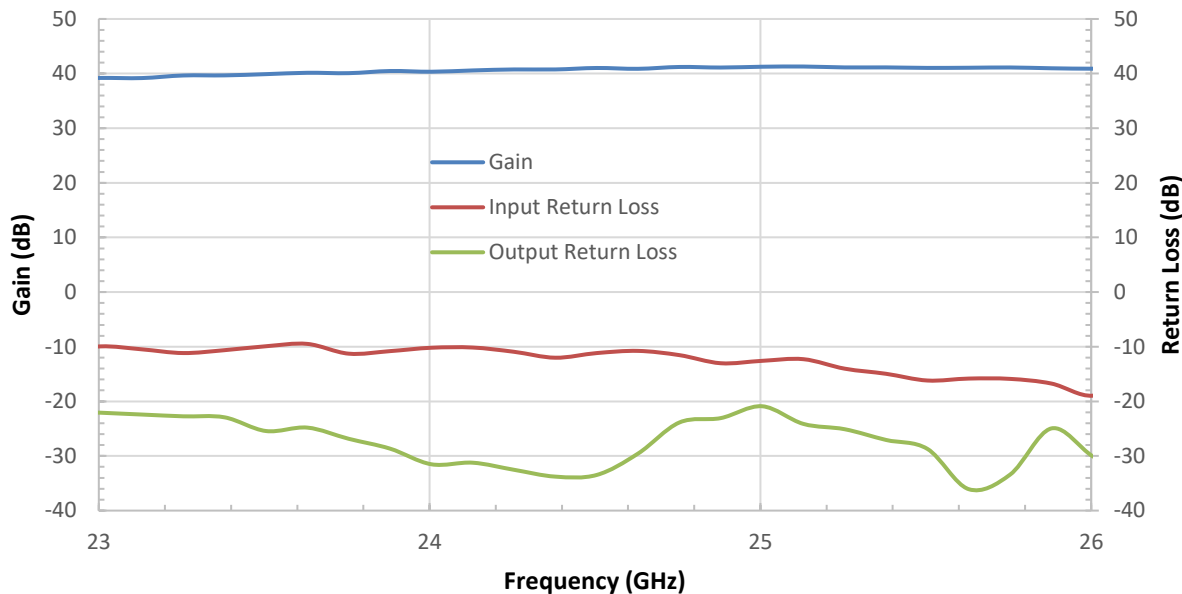

Output Power vs. Frequency


Bias: +8 V_{DC}/3.2 A

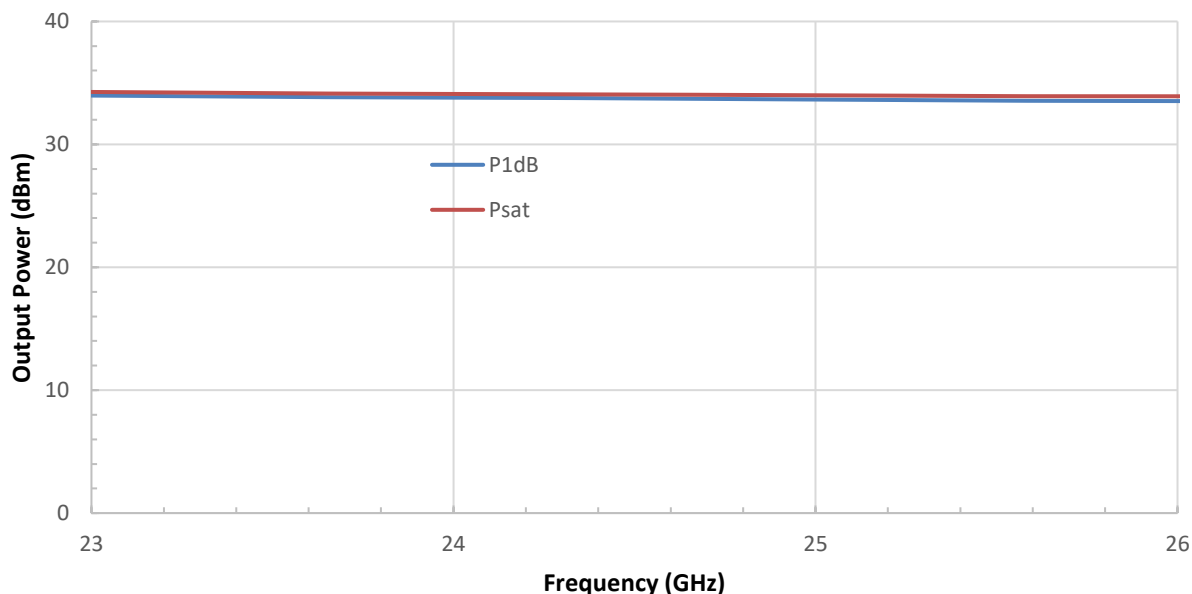



K-Band Power Amplifier, 23 to 26 GHz, 35 dB Gain, +33 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

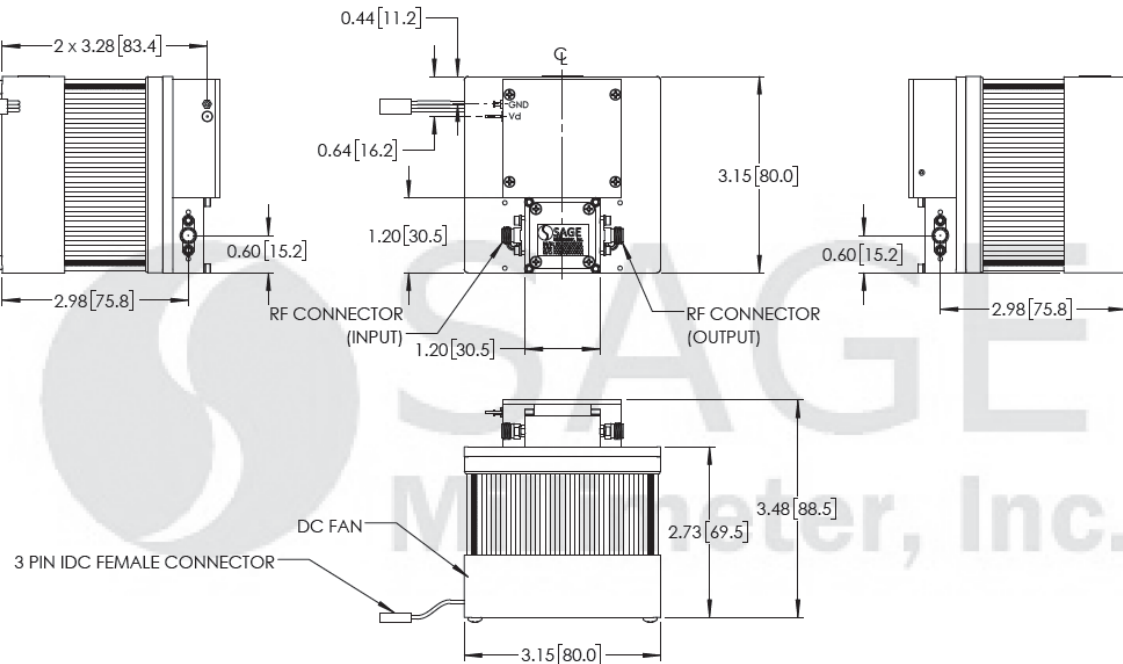

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

