

## SFU-10-N1

## W-Band Balanced Up-Converter

**SFU-10-N1** is a W-Band balanced up-converter that utilizes high performance GaAs Schottky beam-lead diodes and a balanced circuit configuration to offer superior RF performance. The up-converter supports the full waveguide band operation for both LO and RF frequencies from 75 to 110 GHz with an extremely broad IF input from DC to 35 GHz. The up-converter offers a conversion loss of 9.5 dB typical and a high RF to LO port isolation of 30 dB.



## Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	75 GHz		110 GHz
LO Frequency	75 GHz		110 GHz
IF Frequency	DC		35 GHz
LO Pumping Power	+10 dBm	+13 dBm	+15 dBm
Conversion Loss		9.5 dB	12 dB
IF Input P <sub>1dB</sub>		-5 dBm	
RF to LO Isolation		30 dB	
Combined IF and LO Power			+18 dBm
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## Mechanical Specifications:

Item	Specification
RF Ports	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
LO Ports	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
IF Port	K (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.8 Oz
Outline	FB-NW-A

## ECCN

EAR99

## FEATURES

- Full Waveguide Band Coverage
- Low Conversion Loss
- High IF Frequency up to 35 GHz

## APPLICATIONS

- Radar Systems
- Communication Systems
- Test Equipment


## SUPPLEMENTAL DETAILS




SFU-10-N1

Typical Conversion Loss vs. Frequency

RF: -20 dBm; LO: +13 dBm

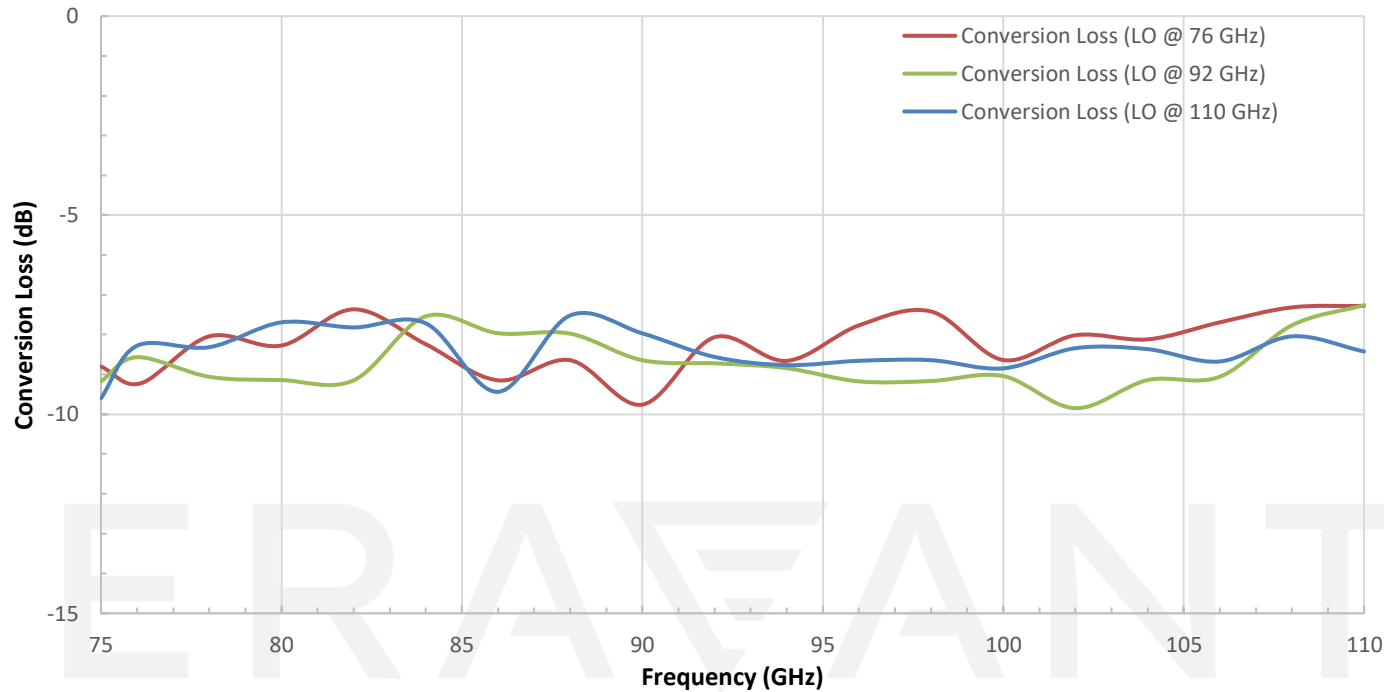

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

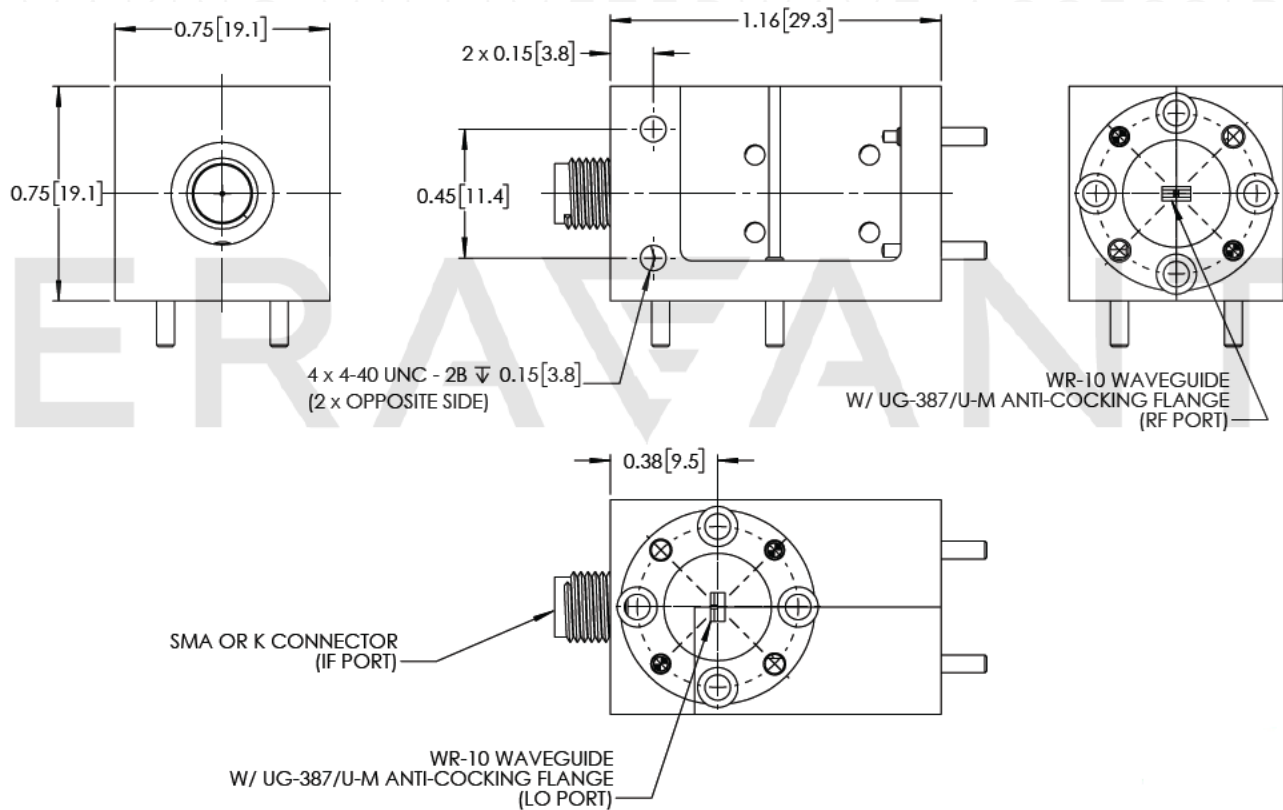

**NOTE:**

- A DC block at IF port may be required when connecting to a device, such as an IF low noise amplifier or a base band mixer which input port is DC coupled.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The IF port of the mixer is DC coupled. Use a DC block when connecting to other devices.
- **Never apply an external bias voltage to the IF port because the mixer will be damaged.**
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE