



Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}

Description:

Model SBP-3133834034-2828-C1-2 is a power amplifier with a typical small signal gain of 40 dB and a nominal P_{1dB} of +34 dBm across the frequency range of 31 to 38 GHz. The DC power requirement for the amplifier is +8 V_{DC}/2.4 A at quiescent and +8 V_{DC}/4.0 A under RF drive. The RF connectors are WR-28 waveguides with UG-599/U flanges. Other port configurations, such as K connectors, are also available under different model numbers.



Features:

- High Gain
- High Output Power

Applications:

- Radar Systems
- Communication Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	31 GHz		38 GHz
Gain		40 dB	
P _{1dB}		+34 dBm	
P _{sat}		+35 dBm	
P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	
DC Supply Current (Quiescent)		2.4 A	
DC Supply Current (Under RF Drive)		4.0 A	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input/ Output Port	WR-28 Waveguide with UG-599/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.07 lb
Size	3.15" (W) X 3.15" (L) X 3.48" (H)
Outline	BK-SA-C1






Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

V_{IN}: +8 V_{DC}/2.4 A

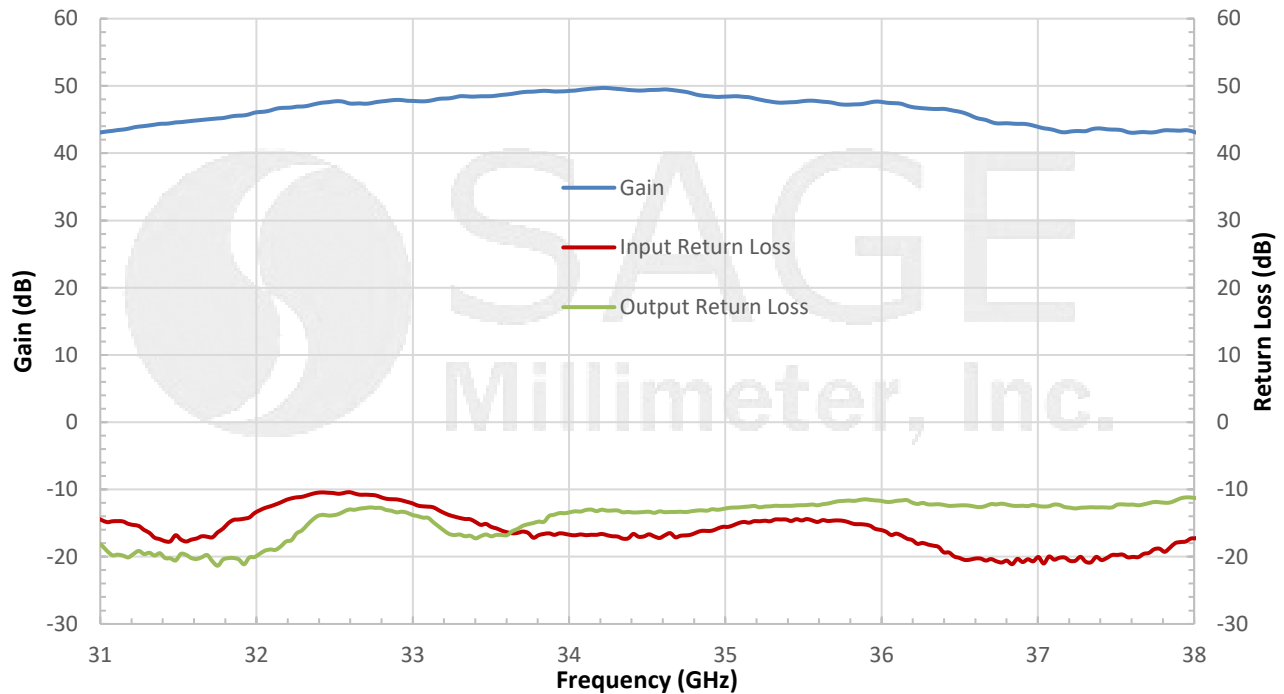

Typical P_{1dB} and P_{sat} vs. Frequency


V_{IN}: +8 V_{DC}/4 A

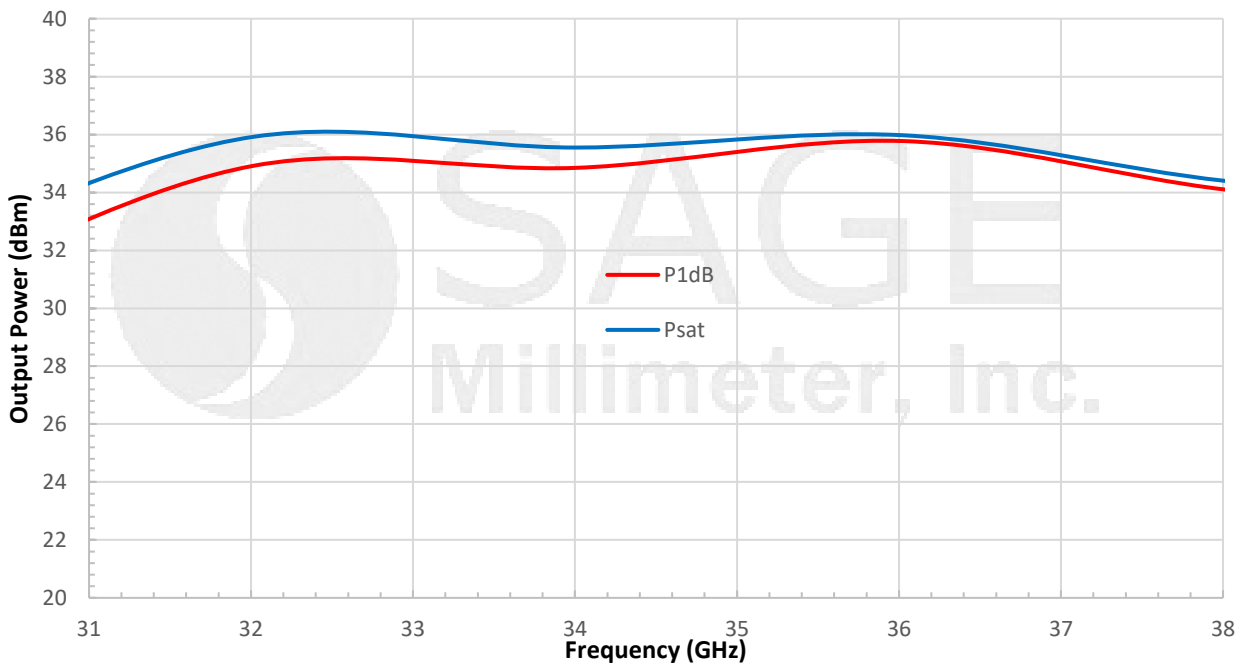



Ka-Band Power Amplifier, 31 to 38 GHz, 40 dB Gain, +34 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

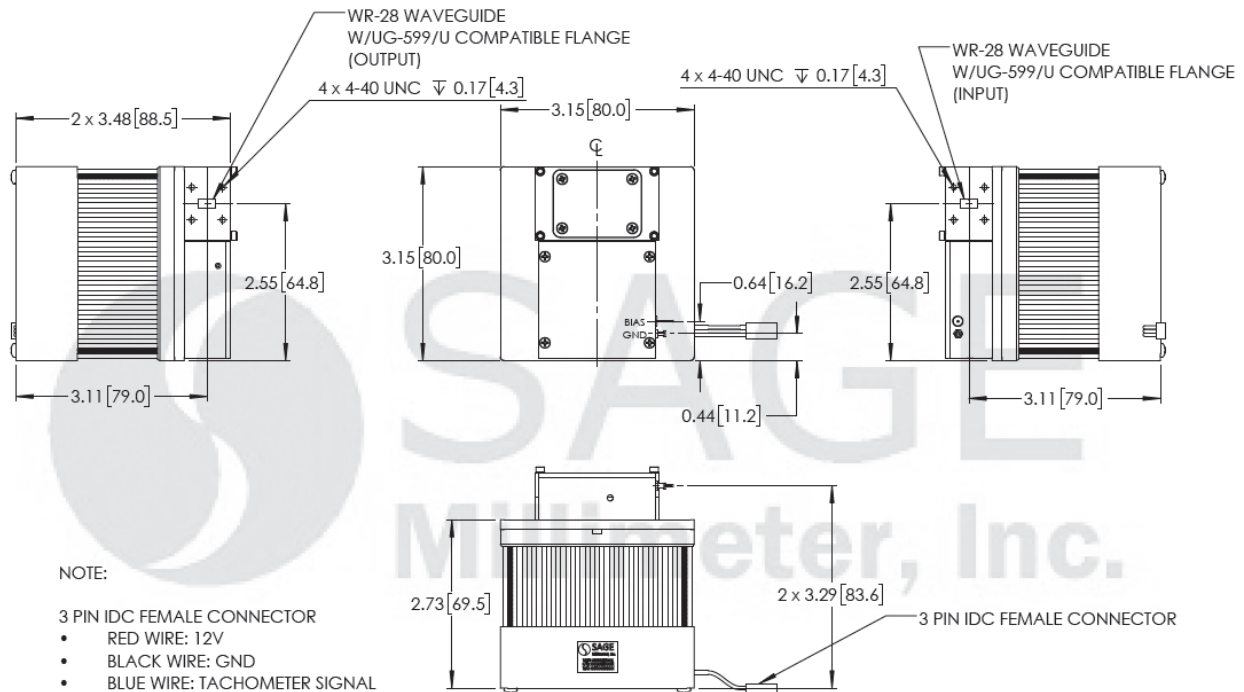

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

