

## Q Band Waveguide Junction Isolator, 37 to 43 GHz

### Description:

**Model SNW-3734330518-22-IJ** is a Q band waveguide junction isolator that covers the frequency range of 37 to 43 GHz. Compared with a Faraday isolator, the waveguide junction isolator offers a lower insertion loss of 0.5 dB nominal and a much shorter insertion length for system integration. As a tradeoff, the waveguide junction isolator only offers an isolation of 18 dB typical. The input and output ports are WR-22 waveguides with UG-383/U anti-cocking flange. Various configurations and frequency ranges are offered under different model numbers.



### Features:

- Low Insertion Loss
- Moderate Isolation
- Compact Configuration

### Applications:

- Port Isolation
- Module Integration

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	37 GHz		43 GHz
Insertion Loss		0.5 dB	
Isolation		18 dB	
Return Loss		16 dB	
Forward Power Handling			5 W (CW)
Reverse Power Handling			1 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
RF Input and Output	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Material	Aluminum
Finish	Gold Plated and Black Anodized
Weight	0.8 Oz
Insertion Length	1.0"
Outline	NW-IQ-A




## Q Band Waveguide Junction Isolator, 37 to 43 GHz

## Typical Performance vs. Frequency

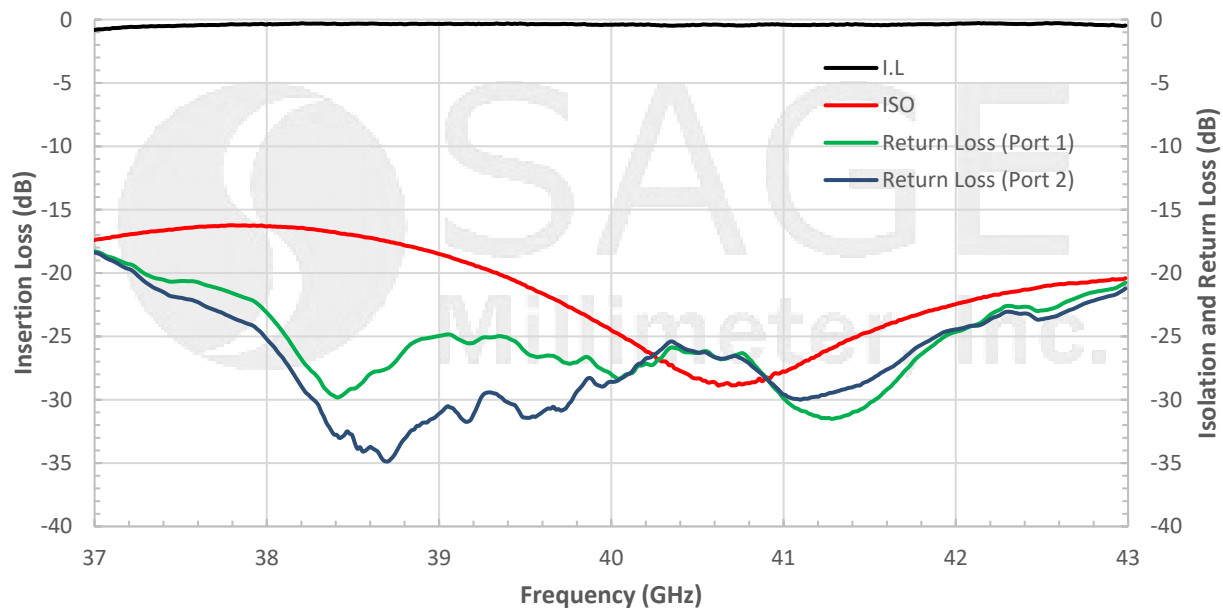

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

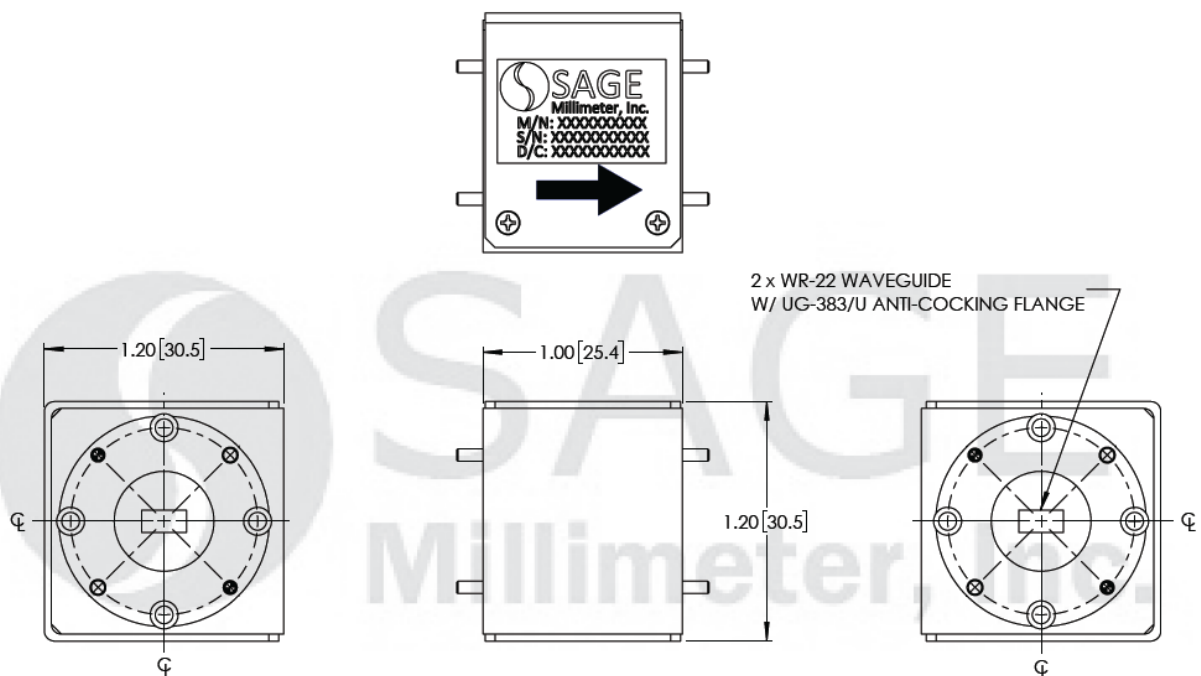



## Q Band Waveguide Junction Isolator, 37 to 43 GHz

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Exceeding absolute maximum ratings will damage the device.
- This device is magnetic sensitive. Keep the device at least 6" away from magnetic fields.
- Any foreign objects in the waveguide will degrade the performance and/or damage the device.

