



W-Band Bias Tuned Gunn Oscillator, 94 GHz, ±500 MHz, +17 dBm

Description:

Model SOB-94301317-10-S1 is a W-band, bias tuned Gunn oscillator that utilizes a high performance GaAs Gunn diode and proprietary cavity design to deliver +17 dBm typical power, useful for phase-locking and electrical tuning applications. The oscillator features a bias frequency tuning range of 93.5 to 94.5 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned mechanically. The Gunn oscillator is equipped with a self-locking set screw for frequency trimming. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Mechanical Tunable

Applications:

- Communication Systems
- Phase Locked Sources
- FMCW Radar

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency	93.5 GHz	94 GHz	94.5 GHz
Power Output		+17 dBm	
Mechanical Tuning Range		±100 MHz	
Bias Tuning Range (+3.5 to +4.5 V _{DC})		±500 MHz	
Bias Voltage	+3.5 V _{DC}	+4.0 V _{DC}	+4.5 V _{DC}
Bias Tuning Speed		100 μS	
Bias Current		750 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
External Bias	Solder Pin
Mechanical Tuning	Self-Locking Set Screw
Body Material	Aluminum
Finish	Gold Plated
Weight	3.0 Oz
Outline	OM-SW-A-C







W-Band Bias Tuned Gunn Oscillator, 94 GHz, ± 500 MHz, +17 dBm

Typical Frequency and Power Output vs. Bias Voltage

Bias: +3.5 to +4.5 Vdc/740 mA

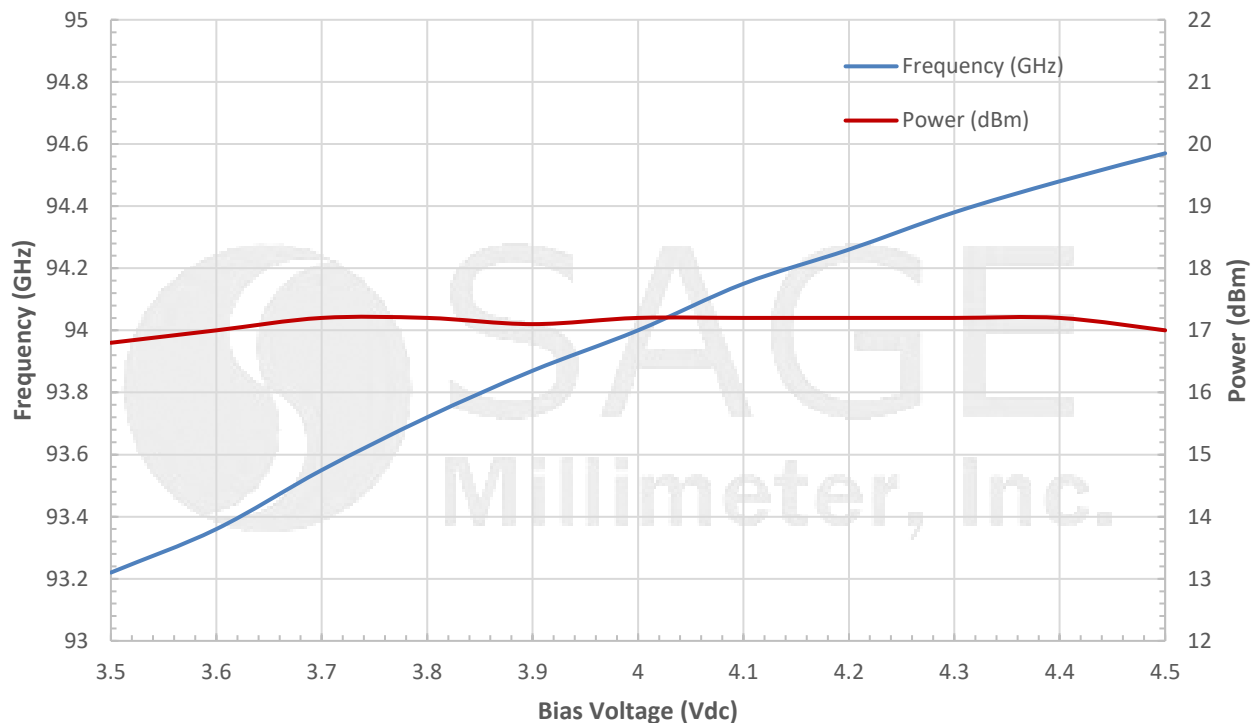

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

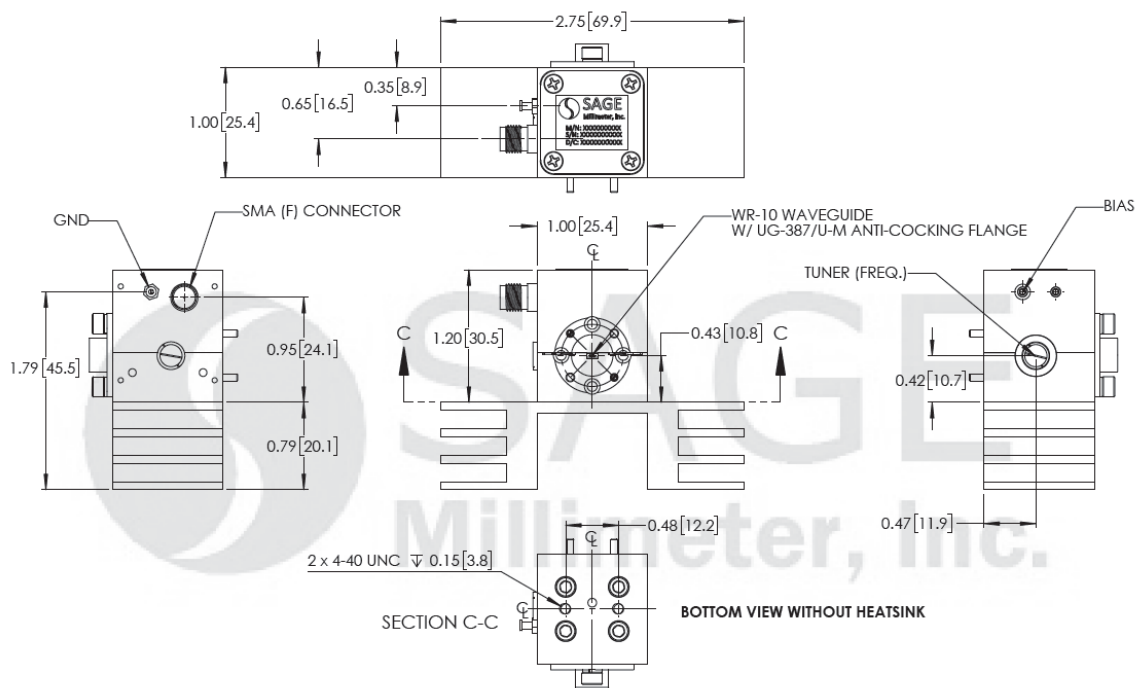



W-Band Bias Tuned Gunn Oscillator, 94 GHz, ± 500 MHz, +17 dBm

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- The data given above was tested under case temperature **+35 °C**.
- The bias tuning feature is used for electrical tuning and phase lock loop applications.
- The tuning speed can be improved per request.
- The mechanical tuning feature is provided for frequency trimming only. To tune the oscillator more than the specified bandwidth mechanically will damage or degrade the oscillator.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+5.0 Volts**, otherwise the oscillator will be damaged.
- The case temperature of the device should never exceed **+50 °C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.4 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

