



Q-Band Power Amplifier, 33 to 47 GHz, 35 dB Gain, +25 dBm P_{1dB}

Description:

Model SBP-3334733525-2222-S1 is a power amplifier with a minimum small signal gain of 35 dB and a nominal P_{1dB} of +25 dBm across the frequency range of 33 to 47 GHz. The DC power supply required for the amplifier is +8 V_{DC}/650 mA. The mechanical configuration offers a right angle structure with WR-22 waveguides and UG-383/U flanges. Other port configurations, such as an in line structure with WR-22 waveguides or 2.4 mm connectors, are also available under different model numbers.



Features:

- Broadband Performance
- High Output Power
- High Gain

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		47 GHz
Gain		35 dB	
P _{1dB}		+25 dBm	
P _{SAT}		+27 dBm	
Maximum P _{in}			+20 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage	+7 V _{DC}	+8 V _{DC}	+15 V _{DC}
DC Current (Quiescent/Saturation)		650 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	WR-22 Waveguide with UG-383/U Flange
Output Port	WR-22 Waveguide with UG-383/U Flange
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Size	1.20" (W) X 2.60" (L) X 0.50" (H)
Outline	BG-SQ-1






Q-Band Power Amplifier, 33 to 47 GHz, 35 dB Gain, +25 dBm P_{1dB}


Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/584 mA

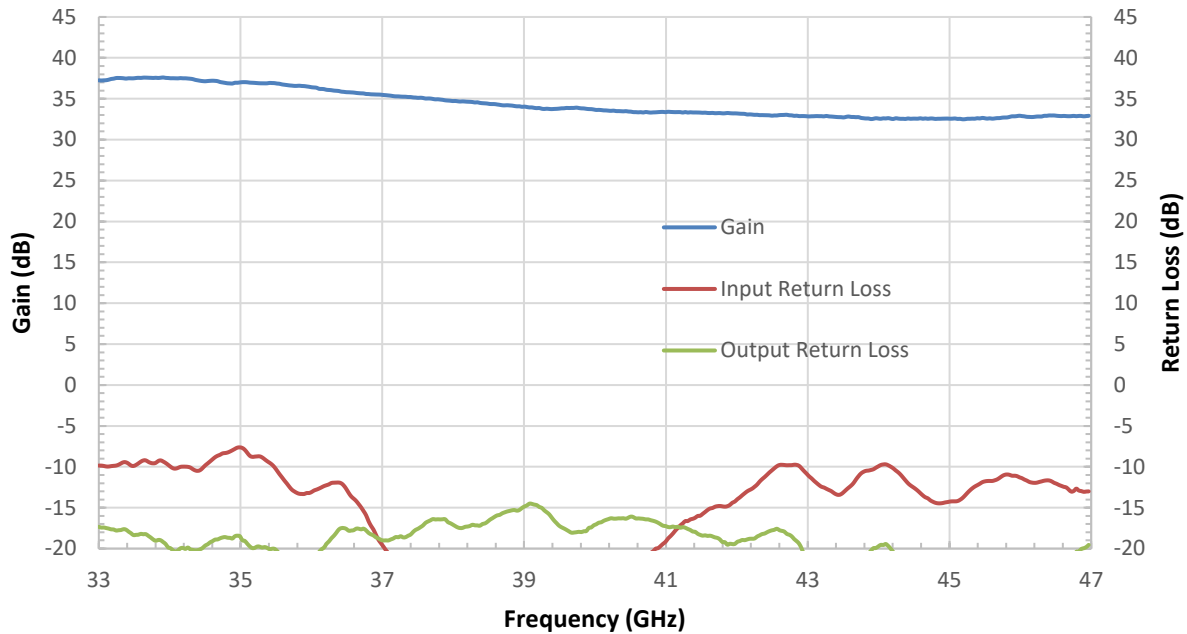

Output Power vs. Frequency


Bias: +8 V_{DC}/ 1200mA

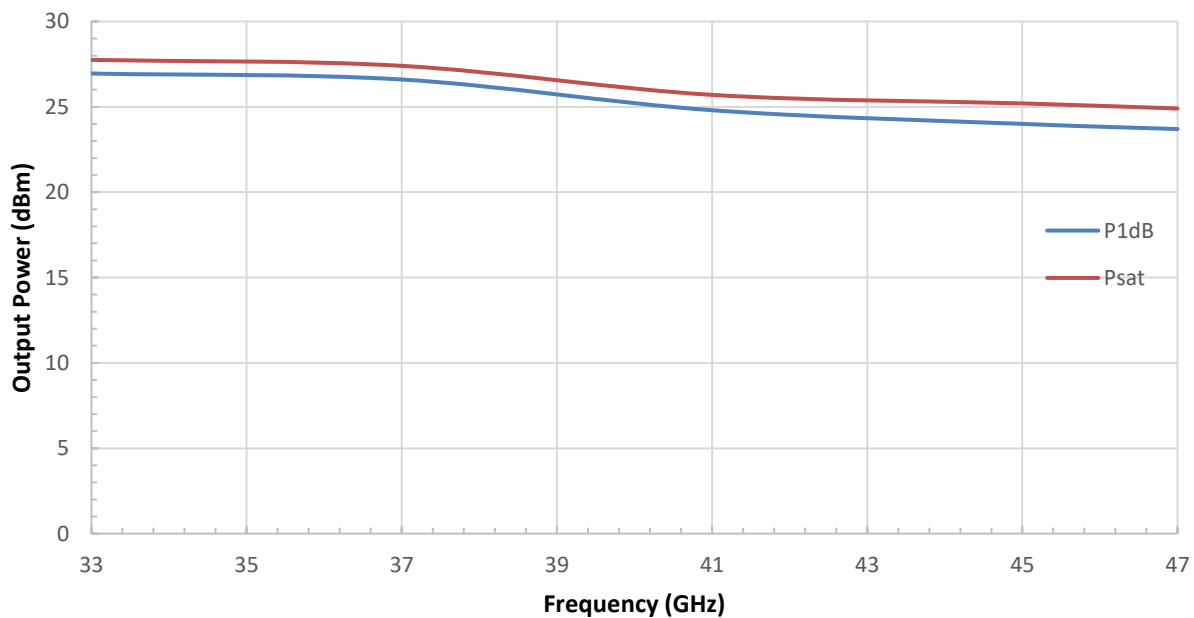



Q-Band Power Amplifier, 33 to 47 GHz, 35 dB Gain, +25 dBm P_{1db}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

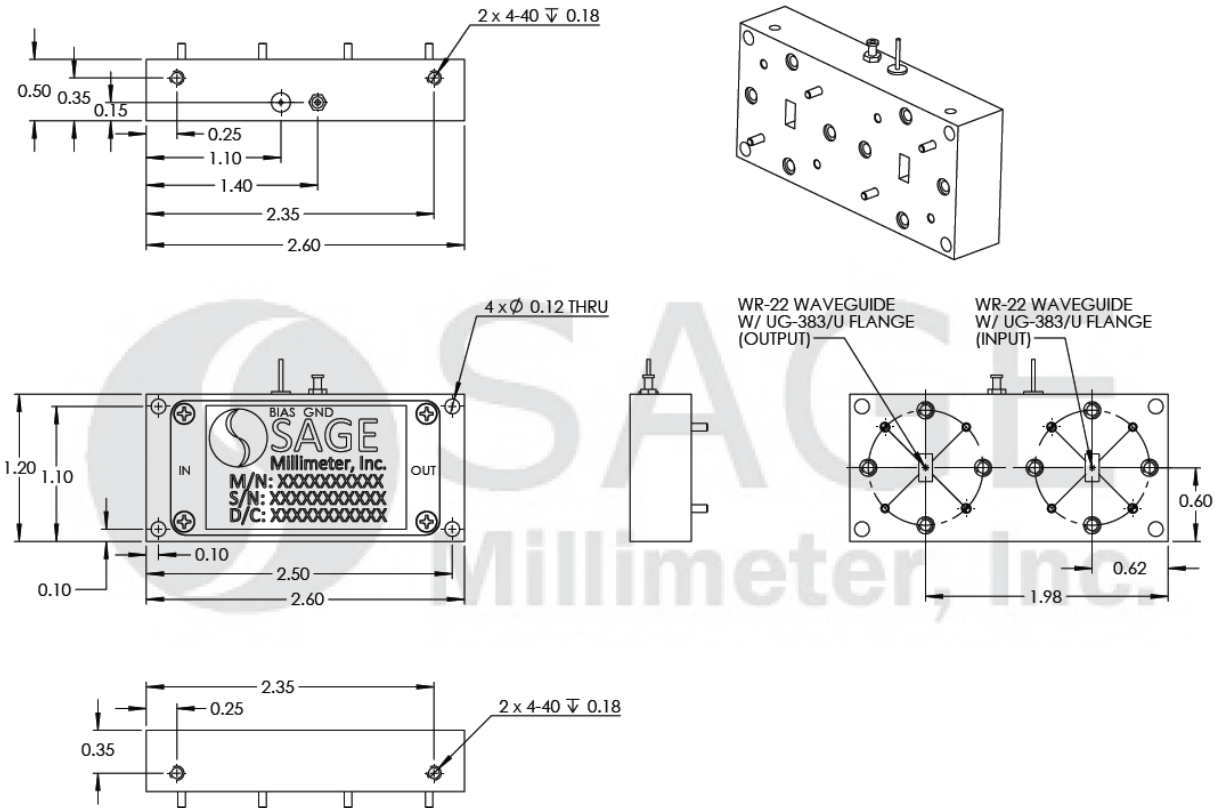

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

