

## SOM-61302313-12-S1

### E-Band Mechanically Tuned Gunn Oscillator, $\pm 1.0$ GHz Tuning Bandwidth

**SOM-61302313-12-S1** is an E-band, mechanically tuned Gunn oscillator that utilizes a high-performance GaAs Gunn diode and proprietary cavity design to deliver +13 dBm typical power. The oscillator features a frequency tuning range of 60.0 to 62.0 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier-based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a self-locking set screw for frequency trimming. Models with a micrometer for lab and test bench applications are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency	60 GHz	61 GHz	62 GHz
Power Output		+13 dBm	
Mechanical Tuning Range		$\pm 1000$ MHz	
Bias Tuning Range (+4.5 to +5.5 VDC)		$\pm 100$ MHz	
Bias Voltage		+5.0 VDC	+5.5 VDC
Bias Current		350 mA	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+50 °C

#### Mechanical Specifications:

Item	Specification
RF Port	WR-12 Waveguide with UG-387/U Anti-cocking Flange
External Bias	SMA (F)
Mechanical Tuning	Self-Locking Set Screw
Body Material	Aluminum
Finish	Gold Plated
Size	2.75" (L) x 1.00" (W) x 1.99 (H)
Weight	3.0 Oz
Outline	OM-SE-A-C

#### ECCN

EAR99

#### FEATURES


- Low AM/FM Noise and Harmonics
- Bias Tunable

#### APPLICATIONS

- Test Sources
- Signal Generation
- Lab Test Setups

## SOM-61302313-12-S1

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

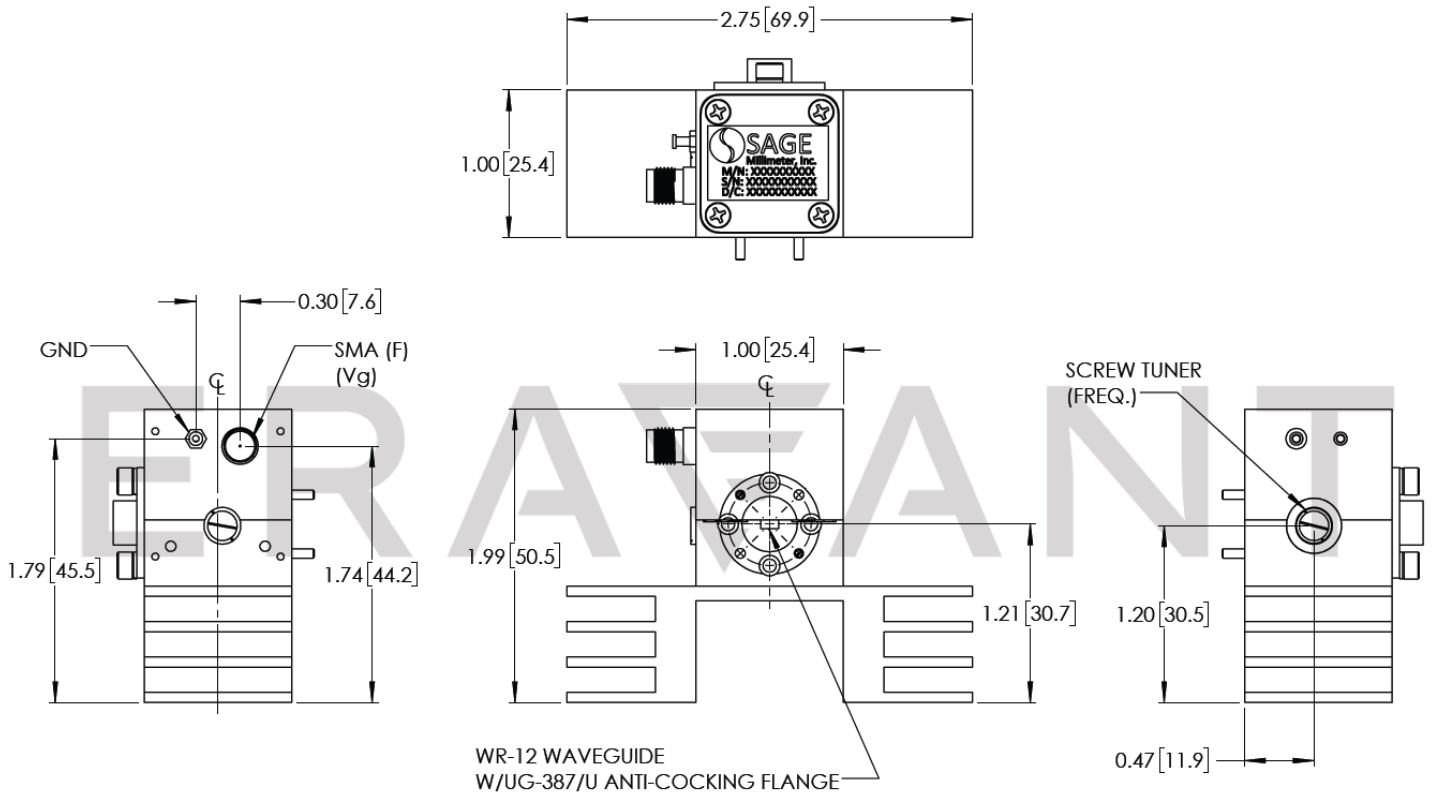

### NOTE:


- The Eravant Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in below.
- The optional AM/FM Modulator **SOR-M3** can be ordered separately to further enhance the functionality of the Gunn oscillator. The outline of the modulator is also shown in the appendix.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.
- Reversing polarity will destroy the device.
- Bias voltage should never exceed +5.5 Volts.
- The case temperature of the device should never exceed +50°C. Use an additional heatsink or fan if necessary.

## SOM-61302313-12-S1

### Appendix: The Outline of the Gunn Oscillator Regulator Model SOR-R3

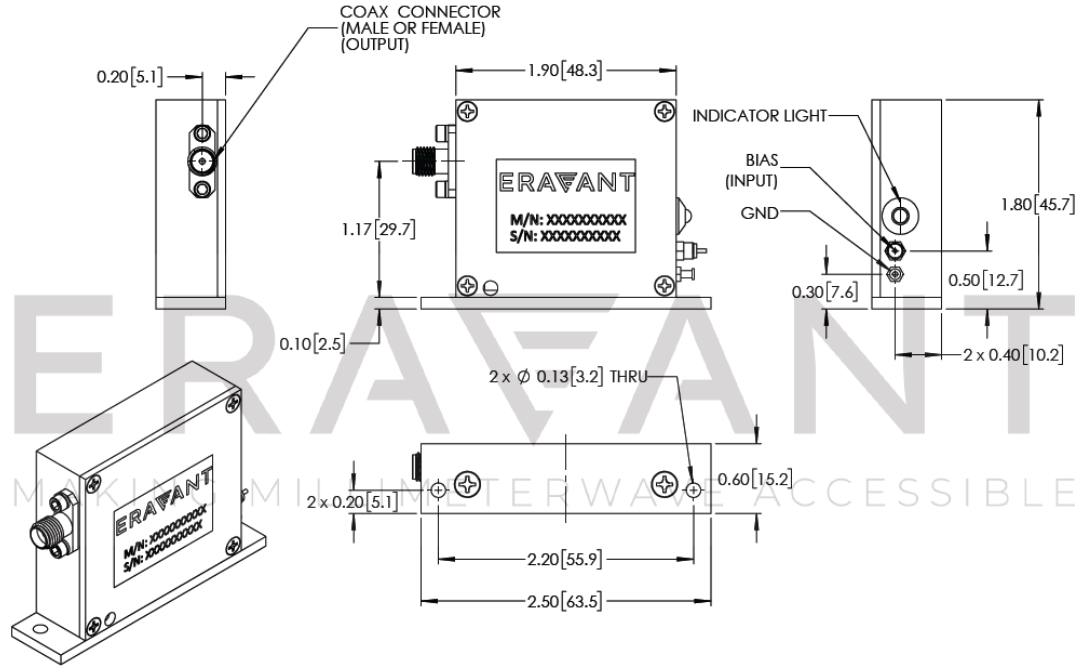

- The outline of the Gunn Oscillator Regulator Model SOR-M3

