



W-Band Mechanically Tuned Gunn Oscillator, 4 GHz Tuning Bandwidth

Description:

Model SOM-77304313-10-M1 is a W-Band, mechanically tuned Gunn oscillator that utilizes a high performance GaAs Gunn diode and proprietary cavity design to deliver +13 dBm typical power. The oscillator features a frequency tuning range of 74.5 to 78.5 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a micrometer for quick frequency tuning and test bench applications. Models with a self-locking set screw for system integration are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		76.5 GHz	
Power Output	+14 dBm	+15 dBm	
Mechanical Tuning Range		±2 GHz	
Bias Tuning Range (+4.0 to +5.0 V _{DC})		±100 MHz	
Bias Voltage		+4.5 V _{DC}	+5.5 V _{DC}
Bias Current		750 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U Flange
DC Bias	SMA(F)
Mechanical Tuning	Micrometer
Body Material	Aluminum
Finish	Gold Plated
Weight	3.6 Oz
Outline	OM-ME







W-Band Mechanically Tuned Gunn Oscillator, 4 GHz Tuning Bandwidth

Typical Frequency and Power Output vs. Micrometer Reading

Bias: +4.5 V_{DC}/750 mA

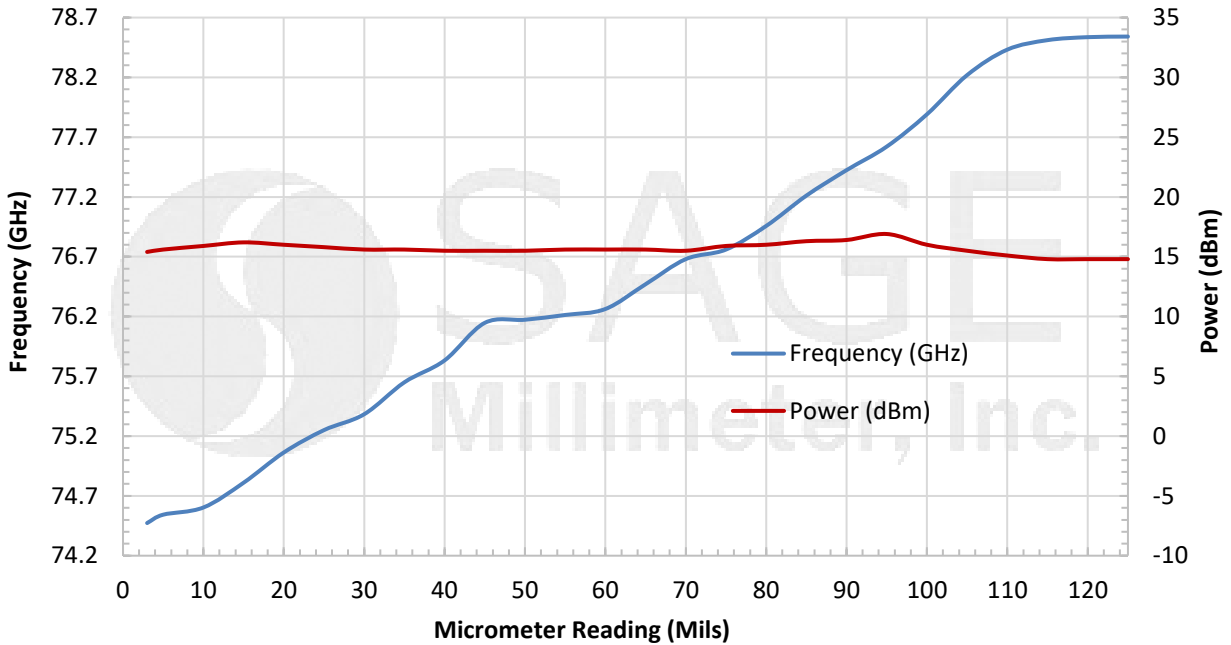

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

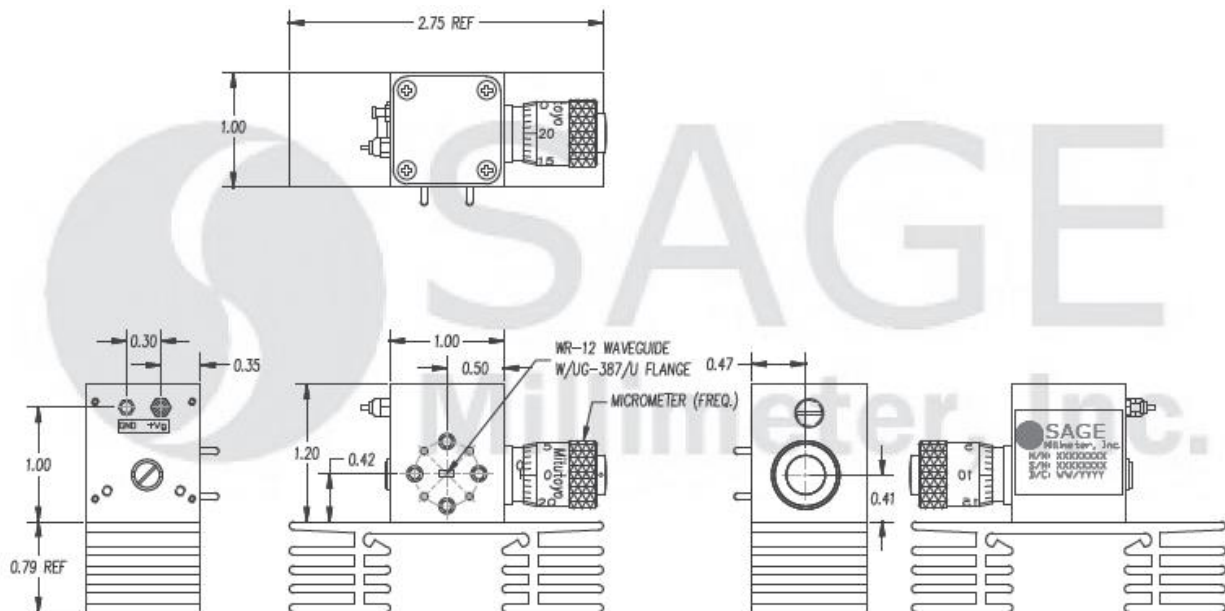



W-Band Mechanically Tuned Gunn Oscillator, 4 GHz Tuning Bandwidth

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- The data given above was tested under case temperature **35°C**.
- Always set micrometer reading to approximately **76.5 GHz** when turning on the oscillator to avoid wrong mode operation.
- The SAGE Millimeter Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in below.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+5.5 Volts**.
- The case temperature of the device should never exceed **+50°C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix: The Outline of the Gunn Oscillator Regulator Model SOR-R3

